

Terminal strips for printed circuit boards

type 8391

12 AWG


spacing 7.5 mm

UL Ratings:


- 12-30 AWG 30A(factory)
- 12-22 AWG 20A (field)
- 300V

CSA Ratings:

- 12-22 AWG 25A
- 300V



clamp direction
parallel to
PC board




clamp direction
vertical to
PC board


See accessories page 171

Wire strip length: 6.5mm


G	T	Poles	part no. marked			
			with insulating plate with fixing bolts	with insulating plate without fixing bolts	without insulating plate	with insulating plate horizontal
15.85	7.5	2	25.174.0253.0	25.164.3253.0	25.164.0253.0	25.164.6253.0
23.35	15.0	3	25.174.0353.0	25.164.3353.0	25.164.0353.0	25.164.6353.0
30.85	22.5	4		25.164.3453.0	25.164.0453.0	25.164.6453.0
38.35	30.0	5		25.164.3553.0	25.164.0553.0	25.164.6553.0
45.85	37.5	6		25.164.3653.0	25.164.0653.0	25.164.6653.0
53.35	45.0	7		25.164.3753.0	25.164.0753.0	25.164.6753.0
60.85	52.5	8		25.164.3853.0	25.164.0853.0	25.164.6853.0
68.35	80.0	9		25.164.3953.0	25.164.0953.0	25.164.6953.0
75.85	87.5	10		25.164.4053.0	25.164.1053.0	25.164.7053.0
83.35	75.0	11		25.164.4153.0	25.164.1153.0	25.164.7153.0
90.85	82.5	12		25.164.4253.0	25.164.1253.0	25.164.7253.0
98.35	90.0	13		25.164.4353.0	25.164.1353.0	25.164.7353.0
105.85	97.5	14		25.164.4453.0	25.164.1453.0	25.164.7453.0
113.35	105.0	15		25.164.4553.0	25.164.1553.0	25.164.7553.0
120.85	112.5	18		25.164.4653.0	25.164.1653.0	25.164.7653.0
128.35	120.0	17		25.164.4753.0	25.164.1753.0	25.164.7753.0
135.85	127.5	18		25.164.4853.0	25.164.1853.0	25.164.7853.0
143.35	135.0	19		25.164.4953.0	25.164.1953.0	25.164.7953.0
150.85	142.5	20		25.164.5053.0	25.164.2053.0	25.164.8053.0
158.35	150.0	21		25.164.5153.0	25.164.2153.0	25.164.8153.0
165.85	157.5	22		25.164.5253.0	25.164.2253.0	25.164.8253.0
173.35	165.0	23		25.164.5353.0	25.164.2353.0	25.164.8353.0
180.85	172.5	24		25.164.5453.0	25.164.2453.0	25.164.8453.0
G	T	Poles	part no. unmarked			
15.85	7.5	2	25.175.0253.0	25.165.3253.0	25.165.0253.0	25.165.6253.0
23.35	15.0	3	25.175.0353.0	25.165.3353.0	25.165.0353.0	25.165.6353.0
30.85	22.5	4		25.165.3453.0	25.165.0453.0	25.165.6453.0
38.35	30.0	5		25.165.3553.0	25.165.0553.0	25.165.6553.0
45.85	37.5	6		25.165.3653.0	25.165.0653.0	25.165.6653.0
53.35	45.0	7		25.165.3753.0	25.165.0753.0	25.165.6753.0
60.85	52.5	8		25.165.3853.0	25.165.0853.0	25.165.6853.0
68.35	80.0	9		25.165.3953.0	25.165.0953.0	25.165.6953.0
75.85	87.5	10		25.165.4053.0	25.165.1053.0	25.165.7053.0
83.35	75.0	11		25.165.4153.0	25.165.1153.0	25.165.7153.0
90.85	82.5	12		25.165.4253.0	25.165.1253.0	25.165.7253.0
98.35	90.0	13		25.165.4353.0	25.165.1353.0	25.165.7353.0
105.85	97.5	14		25.165.4453.0	25.165.1453.0	25.165.7453.0
113.35	105.0	15		25.165.4553.0	25.165.1553.0	25.165.7553.0
120.85	112.5	18		25.165.4653.0	25.165.1653.0	25.165.7653.0
128.35	120.0	17		25.165.4753.0	25.165.1753.0	25.165.7753.0
135.85	127.5	18		25.165.4853.0	25.165.1853.0	25.165.7853.0
143.35	135.0	19		25.165.4953.0	25.165.1953.0	25.165.7953.0
150.85	142.5	20		25.165.5053.0	25.165.2053.0	25.165.8053.0
158.35	150.0	21		25.165.5153.0	25.165.2153.0	25.165.8153.0
165.85	157.5	22		25.165.5253.0	25.165.2253.0	25.165.8253.0
173.35	165.0	23		25.165.5353.0	25.165.2353.0	25.165.8353.0
180.85	172.5	24		25.165.5453.0	25.165.2453.0	25.165.8453.0

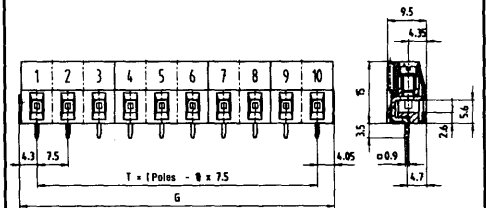


without insulating plate

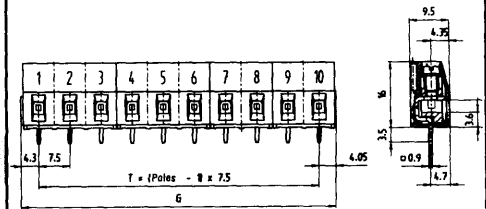

with insulating plate
without fixing bolts

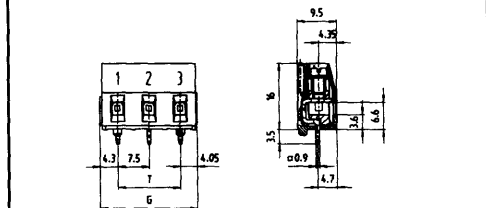


with insulating plate
with fixing bolts

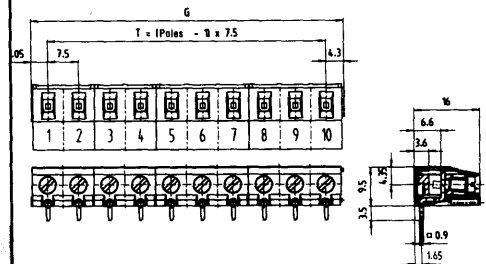


with insulating plate
horizontal

bore hole plan for version with fixing bolts



2 poles



3 poles