
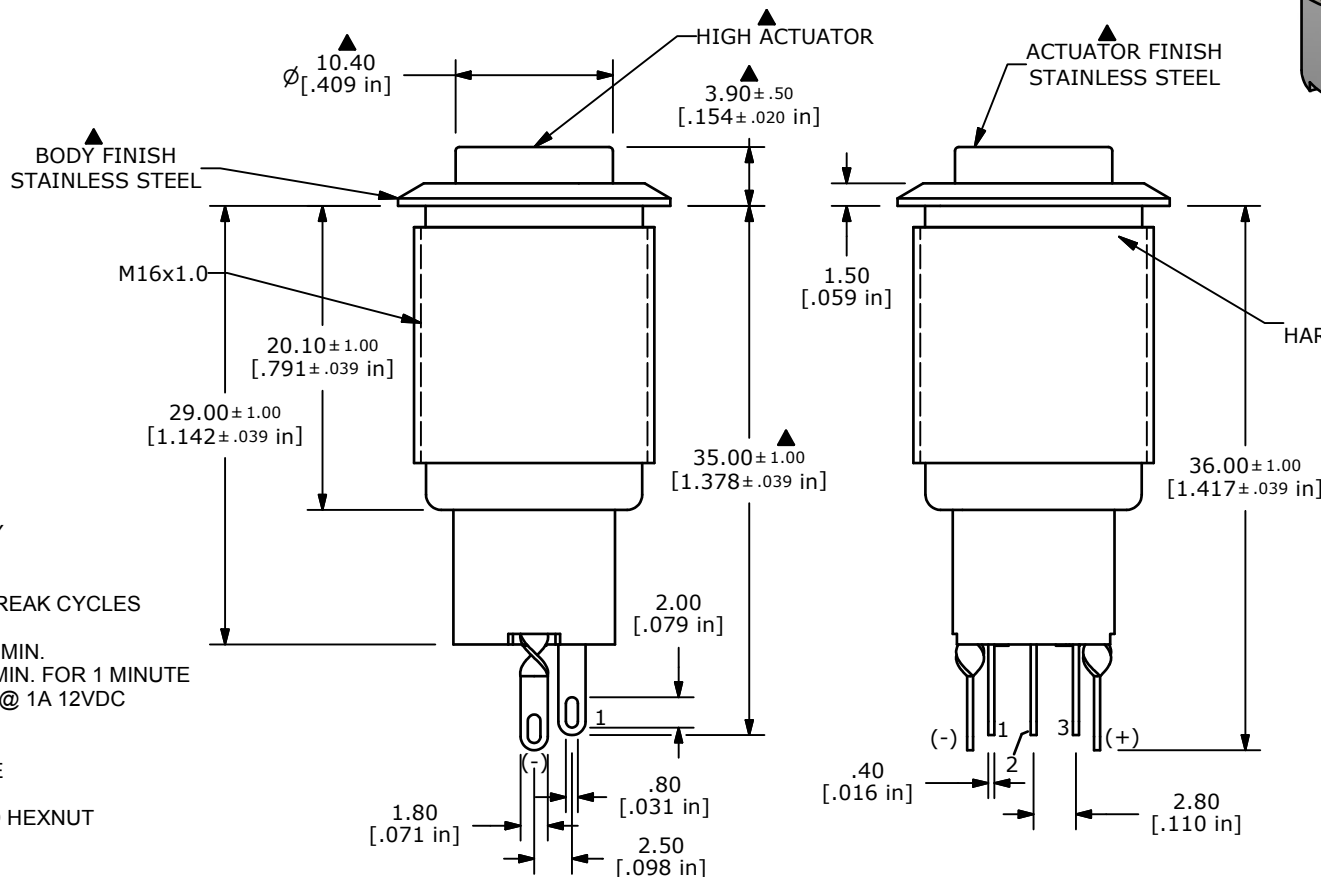

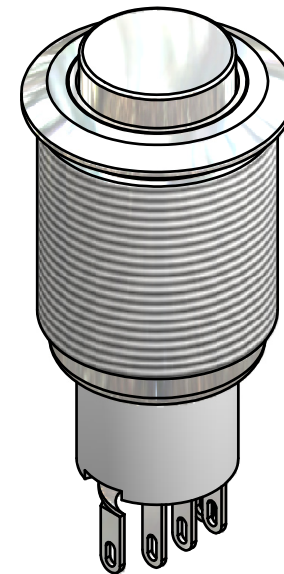


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2

(ON) = MOMENTARY

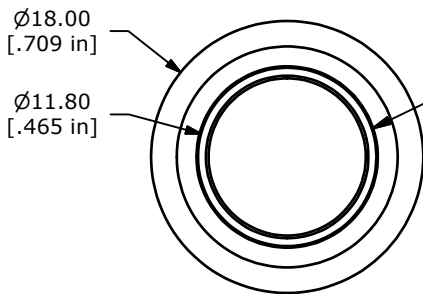

NOTE 14  
HARDWARE SUPPLIED

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - CONTACT MATERIAL: SILVER
  - RATING: 2A 48VDC
  - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
  - INSULATION RESISTANCE: 1,000 MΩ MIN.
  - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
  - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
  - OPERATING TEMP.: -20°C to 55°C
  - ▲ DENOTES CRITICAL PARAMETER.
  - LAMP VOLTAGE: 2V, BASE VOLTAGE
  - ILLUMINATION COLOR: GREEN
  - HARDWARE SUPPLIED: O-RING AND HEXNUT
  - WATERPROOF: IP67



A	20371	RELEASE FOR PRODUCTION	12/29/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV3WH2B0SS-331				
SCALE	DATE	DR	DWG	REV
2:1	12/29/2011	BGL	52-PV3WH2B0SS331	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED