




[PAGE BACK](#) [CLOSE](#)

Product Name **Multilayer Inductor for Signal Line**
Series **MLF Series**
Type **1608 Type**
Part Number **MLF1608A2R7MTA00**

Product Lifecycle Stage PROD

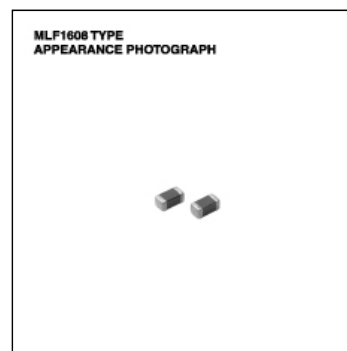

Specification

Mounting Method Flag	Yes	
Processing	MULTI-LAYER	
Shape	SMD	
Size Code	1608	
Body Length(L)	Nom	1.6 m m
Body Breadth(W)	Nom	0.8 m m
Body Height(T)	Nom	0.8 m m
Rated Inductance	Nom	2.7 micro H
Inductance Tolerance (%)	Min	-20 %
	Max	20 %
Test Frequency of Inductance	Nom	10 M Hz
	Min	35
Q	Typ	55
	Nom	10 M Hz
Test Frequency of Q	Min	70 M Hz
	Typ	110 M Hz
Self Resonant Frequency	Max	1.15 Ohm
	Nom	0.5 Ohm
DC Resistance	Max	30 m A
Terminal Material	Ag(100%)/Sn plating	
Polarity Marking	No	
Magnetic Shielding	Yes	
Soldering Method	Reflow,Iron Soldering	
Measuring Equipment(L, Q, Rdc)	LQ:4294A,RDC:7561	
Category Temperature Range	Min	-25 Cel
	Max	85 Cel
Storage Temperature Range	Min	-40 Cel
	Max	85 Cel
Weight	Nom	0.004 g

Summary/Applications/Feature

Summary This is a multilayer inductor with magnetic shielding by Ferrite material.
Applications PC,HDD,etc
Feature High-reliability monolithic structure.
 The products contain no lead and also support lead-free soldering.

Packaging

Packing	Punched (Paper)Taping [180mm Reel]	
Minimum Package Qty	Nom	4000 Pcs
Minimum Order Qty	Nom	4000 Pcs

[Details](#)

[Caution]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

● [**Notice of Revision and Improve**]

All specifications are subject to change without notice.

[PAGE TOP](#) 

Copyright(c) 1996-2008 All rights reserved.