




CMKD6263

SURFACE MOUNT ULTRAMini™
TRIPLE ISOLATED
HIGH VOLTAGE SILICON
SCHOTTKY DIODES

ULTRAMini™



SOT-363 CASE

FEATURES:

- Meets Galvanic Isolation Requirements of IEEE 1394
- High Voltage (70V)

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage	V_{RRM}	70	V
Continuous Forward Current	I_F	15	mA
Forward Surge Current, $t_p=1.0\text{s}$	I_{FSM}	50	mA
Power Dissipation	P_D	250	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	°C
Thermal Resistance	Θ_{JA}	500	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=50\text{V}$		98	200	nA
BV_R	$I_R=10\mu\text{A}$	70			V
V_F	$I_F=1.0\text{mA}$		395	410	mV
C_T	$V_R=0, f=1.0\text{MHz}$			2.0	pF
t_{rr}	$I_R=I_F=10\text{mA}, I_{rr}=1.0\text{mA}, R_L=100\Omega$			5.0	ns

Central™
Semiconductor Corp.

DESCRIPTION:


The CENTRAL SEMICONDUCTOR CMKD6263 contains three (3) galvanically isolated, high voltage Silicon Schottky diodes, epoxy molded in a SOT-363 surface mount package. This ULTRAMini™ device has been designed for fast switching applications requiring a low forward voltage drop.

MARKING CODE: K63


- ULTRAMini™ Package
- Requires less board space than 3 individual diodes
- Low Forward Voltage

SYMBOL	UNITS
V_{RRM}	V
I_F	mA
I_{FSM}	mA
P_D	mW
T_J, T_{stg}	°C
Θ_{JA}	°C/W

SOT-363 CASE - MECHANICAL OUTLINE

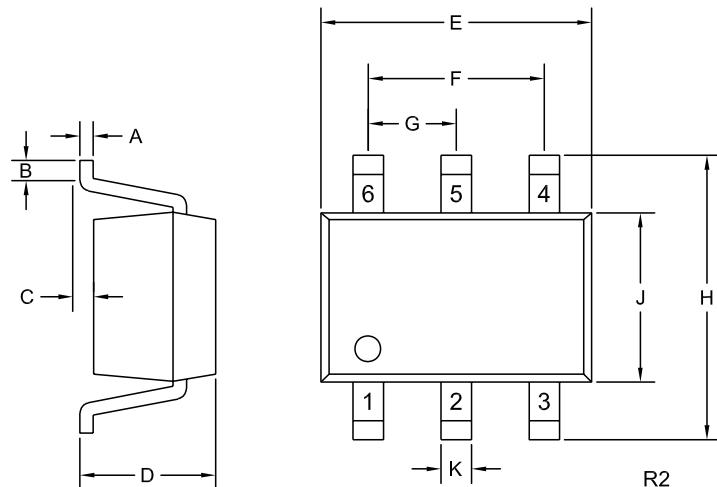

PIN CONFIGURATION

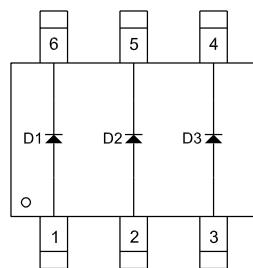

LEAD CODE:

- 1) ANODE D1
- 2) ANODE D2
- 3) ANODE D3
- 4) CATHODE D3
- 5) CATHODE D2
- 6) CATHODE D1

MARKING CODE: K63

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.010	0.10	0.25
B	0.005	-	0.12	-
C	0.000	0.004	0.00	0.10
D	0.031	0.043	0.80	1.10
E	0.071	0.087	1.80	2.20
F	0.051		1.30	
G	0.026		0.65	
H	0.075	0.091	1.90	2.30
J	0.043	0.055	1.10	1.40
K	0.006	0.012	0.15	0.30

SOT-363 (REV: R2)

R3 (21-November 2008)