



■ General Description

The AME8500 family allows the user to customize the CPU reset function without any external components. The user has a large choice of reset voltage thresholds, reset time intervals, and output driver configurations, all of which are preset at the factory. Each wafer is trimmed to the customer's specifications.

These circuits monitor the power supply voltage of μ P based systems. When the power supply voltage drops below the voltage threshold a reset is asserted immediately (within an interval T_{D1}). The reset remains asserted after the supply voltage rises above the voltage threshold for a time interval, T_{D2} . The reset output may be either active high (RESET) or active low (RESETB). The reset output may be configured as either push/pull or open drain. The state of the reset output is guaranteed to be correct for supply voltages greater than 1V.

The AME8501 includes all the above functionality plus an overtemperature shutdown function. When the ambient temperature exceeds 80°C a reset is asserted and remains asserted until the temperature falls below 60°C.

Space saving SOT23 packages and micropower quiescent current ($<3.0\mu\text{A}$) make this family a natural for portable battery powered equipment.

■ Features

- Small packages: SOT-23, SOT-89
- 11 voltage threshold options
- Tight voltage threshold tolerance --- $\pm 1.50\%$
- 4 reset interval options
- 4 output configuration options
- Wide temperature range ----- -40°C to 85°C
- Low temperature coefficient --- 100ppm/°C (max)
- Low quiescent current $< 3.0\mu\text{A}$
- Thermal shutdown option (AME8501)


■ Applications

- Portable electronics
- Power supplies
- Computer peripherals
- Data acquisition systems
- Applications using CPUs
- Consumer electronics




■ Pin Configuration

AME8500AEET
AME8501AEET

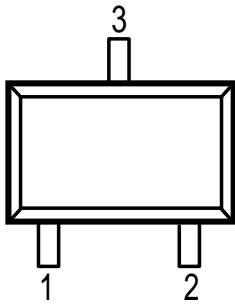


1: GND
2: Reset/ResetB
3: V_{DD}

AME8500BEET
AME8501BEET

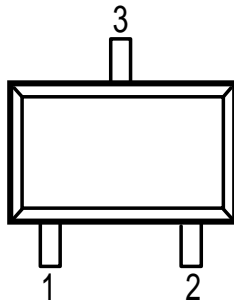


1: Reset/ResetB
2: GND
3: V_{DD}

AME8500CEET
AME8501CEET

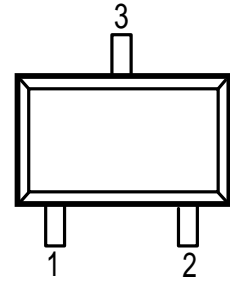


1: Reset/ResetB
2: V_{DD}
3: GND

AME8500AEFT
AME8501AEFT




1: GND
2: V_{DD}
3: Reset/ResetB

AME8500BEFT
AME8501BEFT



1: Reset/ResetB
2: V_{DD}
3: GND

AME8500CEFT
AME8501CEFT



1: V_{DD}
2: GND
3: Reset/ResetB



■ Ordering Information

AME8500xEET X X XX (SOT-23)
 AME8501xEET X X XX (SOT-23)
 AME8500xEFT X X XX (SOT-89)
 AME8501xEFT X X XX (SOT-89)

VDD Threshold Voltage (V_{TH})

- 21: $V_{TH}=2.1V$
- 24: $V_{TH}=2.4V$
- 26: $V_{TH}=2.63V$
- 27: $V_{TH}=2.7V$
- 28: $V_{TH}=2.8V$
- 29: $V_{TH}=2.93V$
- 31: $V_{TH}=3.08V$
- 40: $V_{TH}=4.0V$
- 42: $V_{TH}=4.20V$
- 44: $V_{TH}=4.38V$
- 46: $V_{TH}=4.63V$

note: Please contact AME sales dept. for other voltage options.

Reset Time (T_{D2NOM})

- A: $T_D=1.5mS$
- D: $T_D=30mS$
- E: $T_D=150mS$
- F: $T_D=210mS$

Output Driver Option

characteristic of RESET or RESETB pin	
Polarity	*
A: RESETB	PP
B: RESETB	OD
C: RESET	PP
D: RESET	OD

* Output Driver Chart Explanation:

PP = Push pull output
OD = Open drain output

Polarity
RESET = Active high

--For example--

AME8500AEETA27 means:

Output is RESETB, push pull

Reset time is 210mS

V_{DD} threshold voltage is 2.7V

No temperature shutdown

**Note: AME8500 without over-temperature thermal shutdown function.
AME8501 with over-temperature thermal shutdown function.**



■ Absolute Maximum Ratings

Parameter	Maximum	Unit
Supply Voltage	7	V
ESD Classification	B	
Input Current, V_{DD}	20	mA
Output Current, RESET, ResetB	20	mA
Rate of Rise, V_{DD}	100	V/ μ s

■ Recommended Operating Conditions

Parameter	Rating
Supply Voltage	1.6 - 5 V
Ambient Temperature Range	-40 to +85 °C
Junction Temperature	-40 to +125 °C
Storage Temperature	-65 to 150 °C

■ Thermal Information

Parameter	Maximum	Unit
Thermal Resistance (SOT-23)	325	°C/W
Thermal Resistance (SOT-89)	180	
Power Dissipation (SOT-23)	350	mW
Power Dissipation (SOT-89)	650	
Maximum Junction Temperature	150	°C
Maximum Lead Temperature (10 Sec)	300	°C

Caution: Stress above the listed absolute rating may cause permanent damage to the device



■ **Electrical Specifications**

$T_A = 25^\circ C$ unless otherwise noted

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNITS
V_{DD} Range*	V_{RANGE}			1		5.5	V
		TA=-40~85°C		1		5.5	
Supply Current	I_{DD}	$V_{DD}=3.0V$				3.0	μA
		$V_{DD}=3.0V, TA=-40\sim 85^\circ C$				5.0	
Reset Threshold	V_{TH}			$V_{THNOM}-1.5\%$		$V_{THNOM}+1.5\%$	mV
		TA=-40~85°C		$V_{THNOM}-2.0\%$		$V_{THNOM}+2.0\%$	
Hysteresis Range	V_{HYST}	$V_{Release} - V_{TH}$, note1			20		mV
RESET Threshold Tempco					30		ppm
RESETB Output Voltage Low	V_{OL}	$V_{DD}<V_{th\ min}$	$I_{SINK}=1.2mA,$ TA= -40~85°C			0.5	V
RESET Output Voltage Low		$V_{DD}>V_{th\ max}$					
RESETB Output Voltage High	V_{OH}	$V_{DD}>V_{th\ max}$	$I_{SOURCE}=0.5mA,$ TA= -40~85°C	0.8 V_{DD}			V
RESET Output Voltage High		$V_{DD}<V_{th\ min}$					
V_{DD} to Reset Delay	T_{D1}	$V_{DD}= V_{TH} - 100mV, TA= -40 \sim 85^\circ C$			40	200	μS
Reset Timeout Period*	T_{D2}	TA= -40 ~ 85°C	Version A	0.5	1.5	5	mS
			Version D	15	30	50	mS
			Version E	80	150	230	mS
			Version F	140	210	500	mS
Temperature Shutdown	T_{OFF}	AME8501 only			80		°C
Temperature Shutdown Hysteresis	T_{HYS}	AME8501 only			20		°C

Note1: The data based on $V_{TH}=2.7V$ part type.




■ AME8500/01 pin description

Name	Description
GND	Ground
RESETB/ RESET	This pin can be ordered as RESET or RESETB. RESET is active high. RESETB is active low. It is also available with an open drain or pushpull output.
V_{DD}	Positive power supply. A reset is asserted after this voltage drops below a predetermined level. After V_{DD} rises above that level the reset output remains asserted until the end of the reset timeout period.




■ Timing Diagram

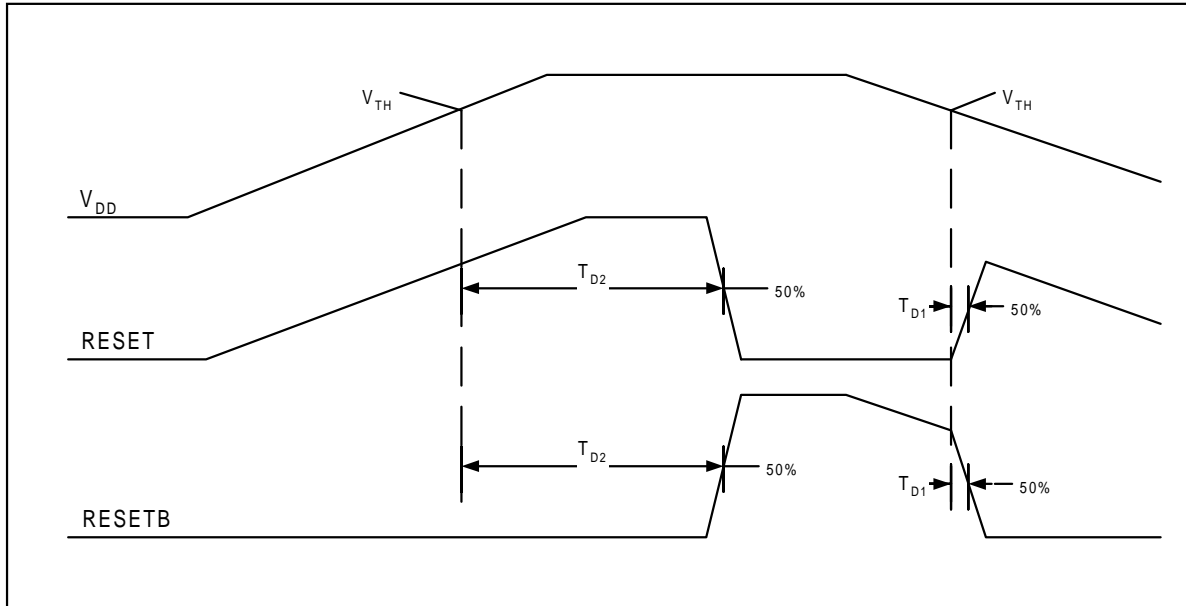

■ Applications information


Supply Transients

These devices have a certain immunity to fast negative going transients. In the following pages the graph titled “Glitch Rejection” indicates the maximum allowable glitch amplitude and duration to avoid triggering an unintended reset. As shown in the graph shorter transients can have larger amplitudes without triggering resets.

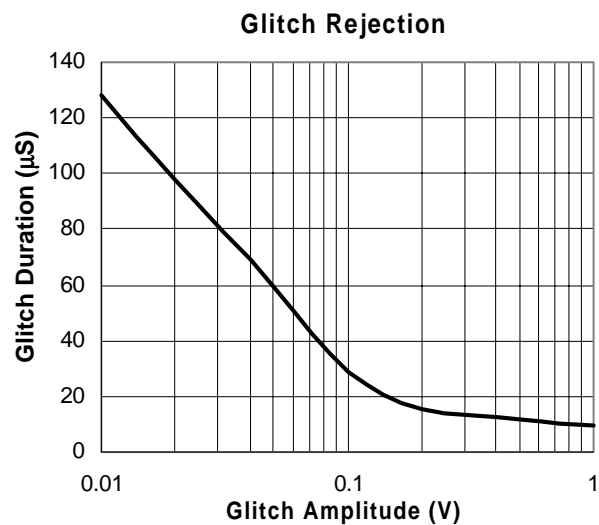





Reset Time vs. Temperature

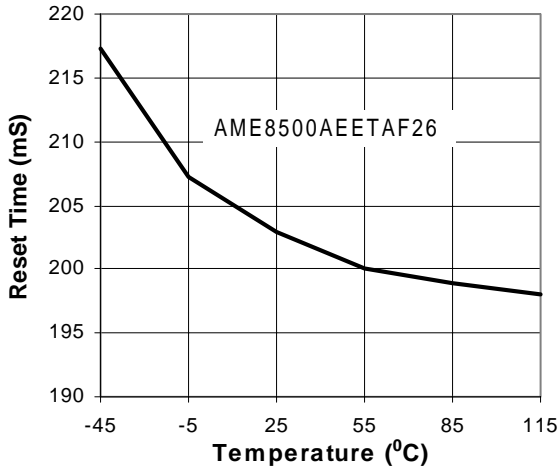


I_{DD} vs. Temperature

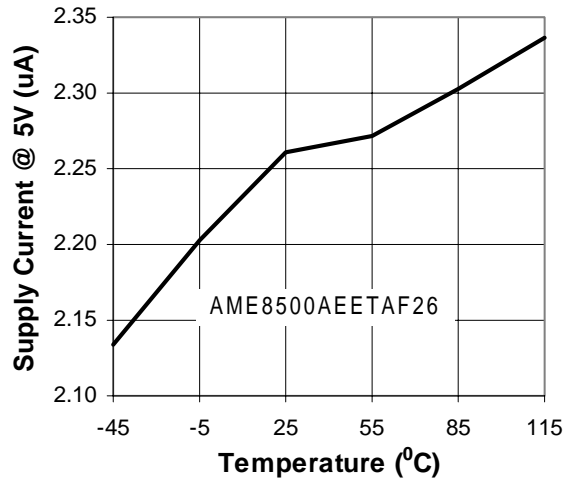


Reset Vth vs. Temperature

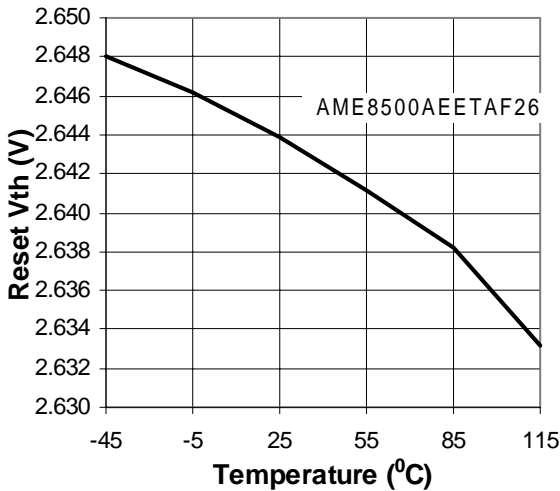


I_{DD} vs. V_{DD}

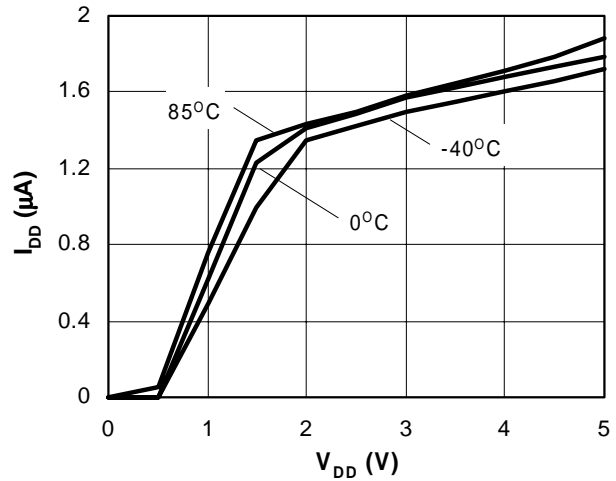


TD1 Delay vs. Temperature

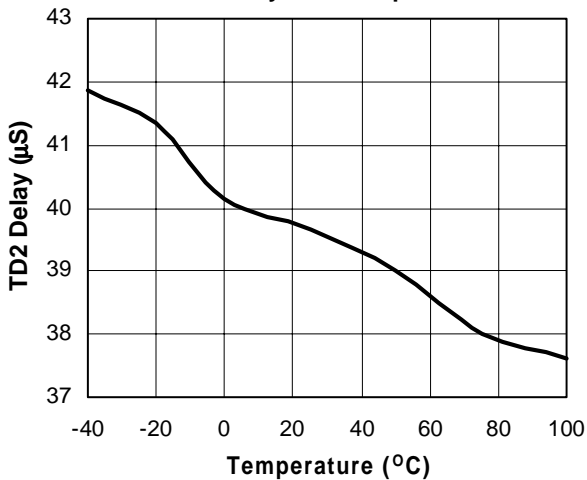

Threshold Hysteresis vs. Temperature

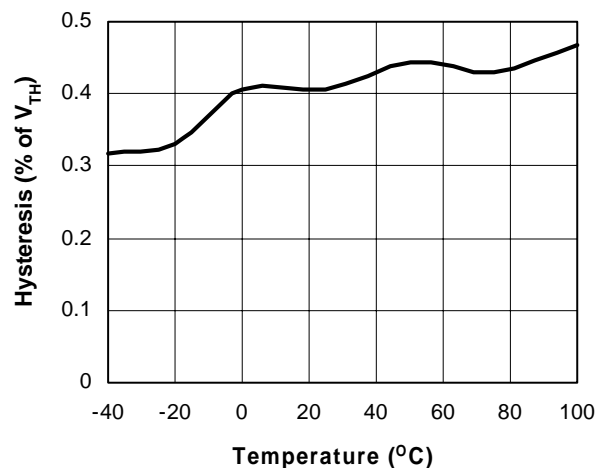


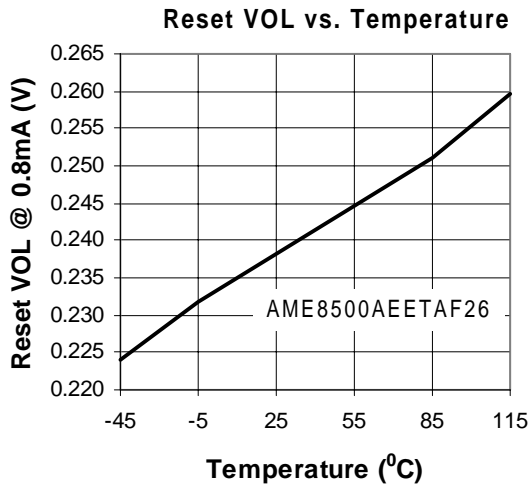




■ Package Dimension

SOT-23

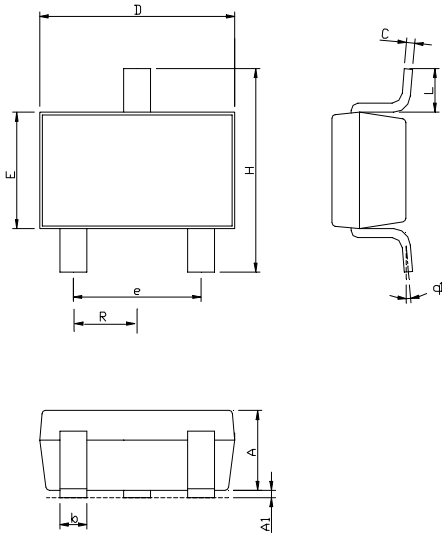

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.00	1.40	0.0394	0.0551
A ₁	0.00	0.15	0.0000	0.0059
A ₂	0.70	1.25	0.0276	0.0492
b	0.35	0.50	0.0138	0.0197
C	0.09	0.25	0.0035	0.0098
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.60	3.00	0.1024	0.1181
L	0.35	0.55	0.0138	0.0197
θ ₁	0°	9°	0°	9°

SOT-89

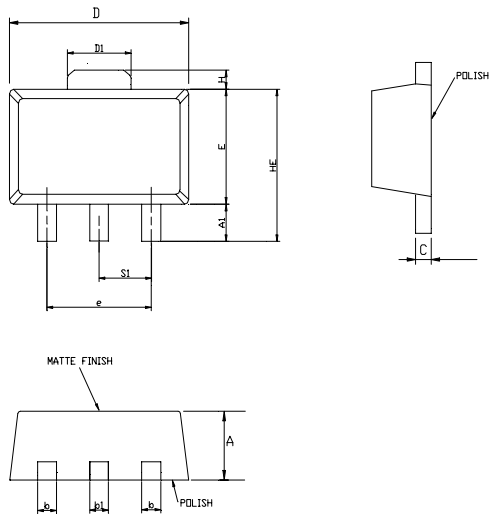

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.40	1.60	0.0551	0.0630
A ₁	0.89	-	0.0350	-
b	0.36	0.52	0.0142	0.0205
b ₁	0.41	0.56	0.0161	0.0220
C	0.35	0.44	0.0138	0.0173
D	4.40	4.60	0.1732	0.1811
D ₁	1.35	1.83	0.0531	0.0720
HE	-	4.25	-	0.1673
E	2.29	2.60	0.0902	0.1024
e	2.90	3.10	0.1142	0.1220
H	0.35	0.70	0.0138	0.0276
S ₁	1.40	1.60	0.0551	0.0630



www.analogmicro.com
E-Mail: info@analogmicro.com

Life Support Policy:

These products of Analog Microelectronics, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of Analog Microelectronics, Inc.

Analog Microelectronics, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© Analog Microelectronics, Inc. , December 2001

Document: 2007-DS8500/8501-F

Corporate Headquarters
Analog Microelectronics, Inc.

3100 De La Cruz Blvd. Suite 201
Santa Clara, CA. 95054-2046
Tel : (408) 988-2388
Fax: (408) 988-2489

Asia Pacific Headquarters
AME, Inc.

2F, No. 187 Kang-Chien Road, Nei-Hu District
Taipei 114, Taiwan, R.O.C.
Tel : 886 2 2627-8687
Fax: 886 2 2659-2989