



www.DataSheet4U.com

液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

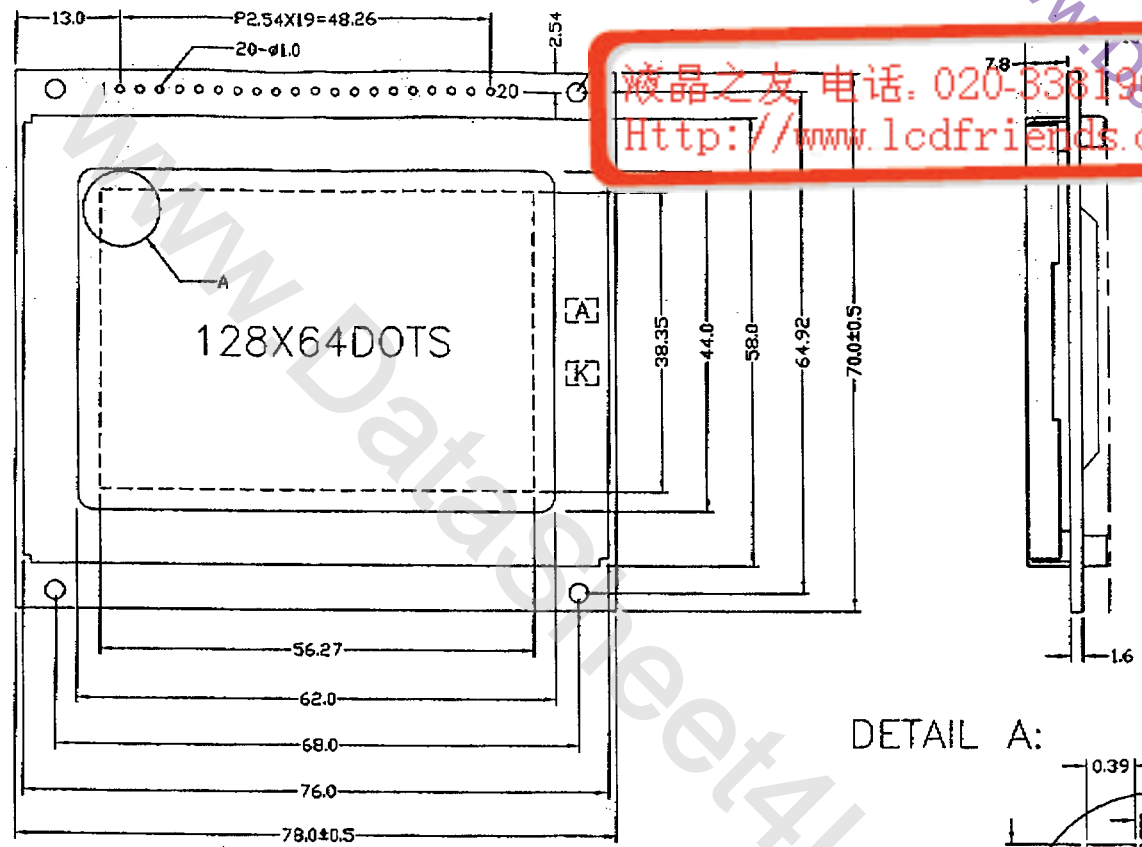


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
FG	GND	VCC	VO	/WR	/RD	/CE	C/D	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	LED+	LED-

DETAIL A:



- NOTES:
- 1.DISPLAY TYPE: STN/YELLOW-GREEN MODE
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 - 4.DRIVE METHOD: 1/64 DUTY 1/9 BIAS
 - 5.LCD OPERATING VOLTAGE: 9.5V
 - 6.VDD=5.0V
 - 7.OPERATING TEMP: -20°C~+70°C
 - 8.STORAGE TEMP: -30°C~+80°C
 - 9.BACKLIGHT: LED(4.2V,YELLOW)
 - 10.CONTROLLER AND DRIVERS: T6963C+T6A40+T6A39X2
 - 11.UNMARKED TOLERANCE: ±0.3
 - 12.THE OPTIONAL JUMP POINT OF J2,J6,J7,J10 ON PCB MUST BE CONNECTED WITH SOLDER.

 TIAN-MA MICROELECTRONICS CO. 22/F., HANGDU Building, Shennan Road, Central, Shenzhen, D		TITLE: TM12864BCW3	
		DRAWN BY: 李健 5/02 CHECKED BY: 马素娟 8/02 APPROVED BY: 曹江波 7/02	DWG NO: G-1