

## SPECIFICATIONS

### Mechanical

**Contact Normal Force:** 0.03 to 0.05kg

**Durability:** 10000 Cycles

### Electrical

**Current Rating:** 0.5A

**Contact Resistance:** 100mΩ max.

**Dielectric Withstanding Voltage:** 1000V AC/1 min.

**Insulation Resistance:** 500MΩ min.

### Physical

**Housing:** Thermoplastic, UL 94V-0 rated in Ivory Color

**Contact:** Copper alloy

**Plating:** See "ORDERING INFORMATION"

**Solder Pad:** Copper alloy

**Operating Temperature:** -20 °C to +60 °C


## SIM Card Connector

**WL Series**



**SMT Type**

**2.54mm [.100"] Pitch**


**6 Pos.**

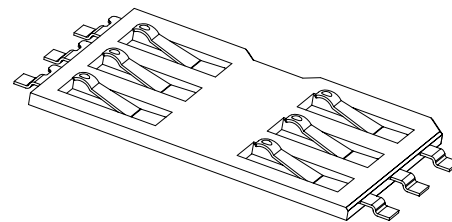

## DRAWING

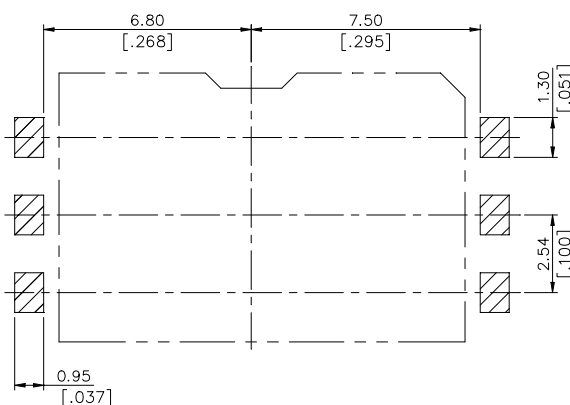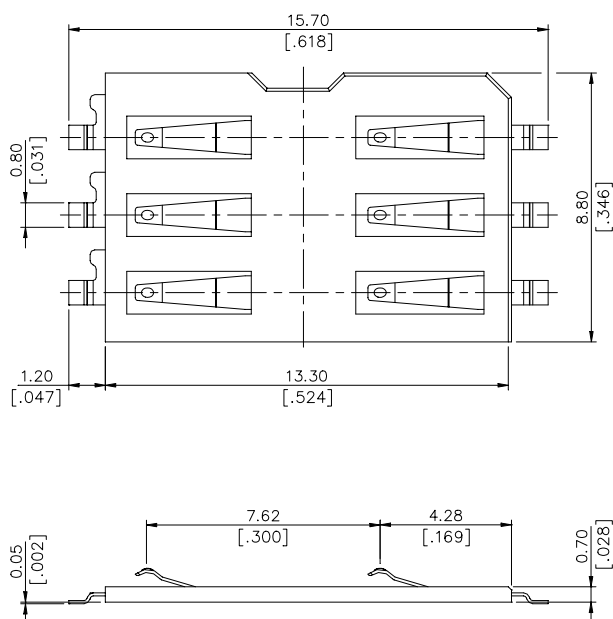

RECOMMENDED P.C.B. LAYOUT



## ORDERING INFORMATION

PRODUCT NO.: WL 6 07 A 3 - L01 - TR

SIM Card Connector

No. of Pos.  
6=6 Pos.

Body Height  
07=0.70 mm

Package Type  
TR=Tape And Reel

Extension Code

Contact Plating  
3=30μ" Gold

Upper Cover Type  
A=Without Upper Cover