




Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Planar passivated chips
- Blocking voltage up to 1600 V
- Low forward voltage drop
- UL registered E72873



Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

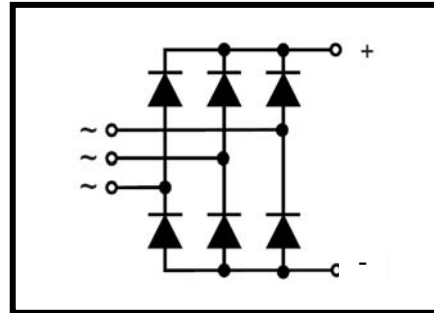

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling

ABSOLUTE MAXIMUM RATINGS

T_C=25°C unless otherwise specified

Symbol	Test Condition	Value	Unit
V _{RRM}		1200	V
I _{d(AV)}	T _C =100 , module	100	A
I _{FSM}	T _J =45 ; t=10ms (50Hz),sine	1000	A
	V _R =0 t=8.3ms(60Hz),sine	1080	A
	T _J =150 ; t=10ms (50Hz),sine	800	A
	V _R =0 t=8.3ms(60Hz),sine	860	A
I ² t	T _J =45 ; t=10ms (50Hz),sine	5000	A ² s
	V _R =0 t=8.3ms(60Hz),sine	5830	A ² s
	T _J =150 ; t=10ms (50Hz),sine	3200	A ² s
	V _R =0 t=8.3ms(60Hz),sine	3700	A ² s
T _J ,T _{STG}		-40 to +150	
T _{JM}		150	
V _{ISOL}	50/60Hz RMS t=1 min	2500	V~
	I _{ISOL} ≤1mA t=1 s	3000	V~
Md	Mounting torque(M5)	5±15%	N·m
	Terminal connection torque(M5)	5±15%	N·m
Weight	typical	130	g

MIMMD100E120X

ELECTRICAL AND THERMAL CHARACTERISTICS T_C=25°C unless otherwise specified

Symbol	Test Condition	Value	Unit
I _R	V _R = V _{RRM} ; T _J = 25	≤0.5	mA
	V _R = V _{RRM} ; T _J =T _{JM}	≤5	mA
V _F	I _F =200A; T _J =125	1.4	V
V _{T0}	For power-loss calculations only	0.8	V
R _{thJC}	per diode; DC current	0.9	K/W
	Per module	0.15	K/W
R _{thCS}	per diode; DC current(typ.)	0.42	K/W
	per module(typ.)	0.07	K/W
d _S	Creeping distance on surface	10	mm
d _A	Cree page distance in air	9.4	mm
a	Max. allowable acceleration	50	m/s ²

NOTE: Data according to IEC 60747 and refer to a single diode unless otherwise stated.

Package Outline (Dimensions in mm)

