



POSTRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYING SUCH INFORMATION AT HIS OWN DISCRETION ASSUMES ALL LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

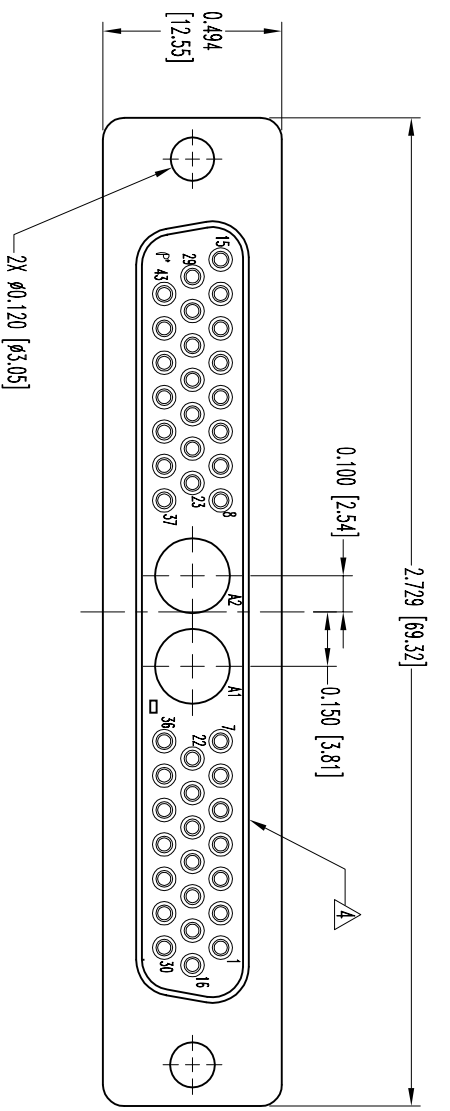

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, PER MIL-M-24519, UL 94V-0, BLUE COLOR.
SHELLS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.
 2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS.
 3. TEMPERATURE RANGE: -55°C TO 125°C.
 4. PERMANENTLY MARK CONNECTOR WITH: "P" ID SK2958 DATE CODE".
 5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
2-12-98	NC	ECO 12824	RCW	MS	COL
3-25-08	A	ECO 20744	RCW	MR	MEG
6-18-08	B	ECO 21080		YK	

SK2958



POSTRONIC INDUSTRIES INC.
www.connectpositronic.com

SCALE: N.T.S.

DRAWN BY: **M. SNOW**

APPROVED BY: **RCW**

TITLE: **FEMALE SPECIAL CONNECTOR**

DATE: **2-12-98** DRAWING NUMBER: **SK2958**

DECIMAL TOL: **± 0.015 [0.38]** ANGLULAR TOL: **± 5°**

REV: **B**