


# Solid Tantalum Surface Mount Chip Capacitors

## TANTAMOUNT<sup>®</sup> Molded Case, Military MIL-PRF-55365/8 Qualified

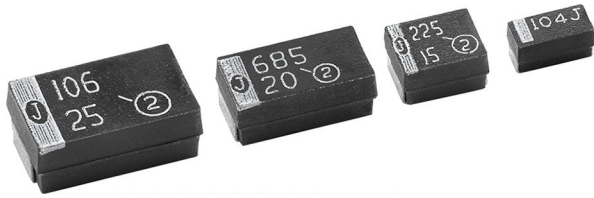

### FEATURES

- Weibull failure rate codes B, C, D and T
- Surge current options A, B and C
- Termination: H = Solder plated, K = Solder fused
- Molded case available in four case codes
- Compatible with “High Volume” automatic pick and place equipment

### PERFORMANCE/ELECTRICAL CHARACTERISTICS

[www.vishay.com/doc?40088](http://www.vishay.com/doc?40088)

**Operating Temperature:** - 55 °C to + 125 °C  
(above 85 °C, voltage derating is required)

**Capacitance Range:** 0.10 µF to 100 µF

**Capacitance Tolerance:** ± 5 %, ± 10 %, ± 20 %

**Voltage Rating:** 4 V<sub>DC</sub> to 50 V<sub>DC</sub>

### APPLICATIONS

- Military/aerospace
- General purpose
- High reliability

ORDERING INFORMATION							
CWR11	D	H	155	K	B	A	/HR
TYPE	VOLTAGE	TERMINATION FINISH	CAPACITANCE	CAPACITANCE TOLERANCE	FAILURE RATE %/1000 h	SURGE CURRENT (OPTIONAL)	PACKAGING OPTION
	C = 4 V D = 6 V F = 10 V H = 15 V J = 20 V K = 25 V M = 35 V N = 50 V	H = Solder plated K = Solder fused	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	J = ± 5 % K = ± 10 % M = ± 20 %	M = 1.0 P = 0.1 R = 0.01 S = 0.001 B = 0.1 C = 0.01 D = 0.001 T = 0.01 <sup>(1)</sup>	A = 3 cycles at + 25 °C B = 3 cycles at - 55 °C/+ 85 °C C = 3 cycles at - 55 °C/+ 85 °C (before Weibull grading)	Blank = Full reel /PR = 100 pcs reel /HR = half reel /PT = Bulk, plastic tray /FA = Waffle pack

#### Note


<sup>(1)</sup> T level capacitors are recommended for “Space applications”. Shipped in tape and reel/or waffle packaging only.

DIMENSIONS in inches [millimeters]							
CASE CODE	EIA SIZE	L	W	H	P	T <sub>W</sub>	T <sub>H</sub> MIN.
A	3216-18	0.126 ± 0.008 [3.2 ± 0.20]	0.063 ± 0.008 [1.6 ± 0.20]	0.063 ± 0.008 [1.6 ± 0.20]	0.031 ± 0.012 [0.80 ± 0.30]	0.047 ± 0.004 [1.2 ± 0.10]	0.028 [0.70]
B	3528-21	0.138 ± 0.008 [3.5 ± 0.20]	0.110 ± 0.008 [2.8 ± 0.20]	0.075 ± 0.008 [1.9 ± 0.20]	0.031 ± 0.012 [0.80 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.028 [0.70]
C	6032-28	0.236 ± 0.012 [6.0 ± 0.30]	0.126 ± 0.012 [3.2 ± 0.30]	0.098 ± 0.012 [2.5 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.039 [1.0]
D	7343-31	0.287 ± 0.012 [7.3 ± 0.30]	0.170 ± 0.012 [4.3 ± 0.30]	0.110 ± 0.012 [2.8 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.095 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]

#### Note

- Glue pad (non-conductive, part of molded case) is dedicated for glue attachment (as user option).

RATINGS AND CASE CODES								
μF	4 V	6 V	10 V	15 V	20 V	25 V	35 V	50 V
0.10							A	A
0.15							A	B
0.22							A	B
0.33						A	A	B
0.47					A	A	B	C
0.68				A	A	B	B	C
1.0			A	A	A	B	B	C
1.5		A	A	A	B	B	C	D
2.2	A	A	A	B	B	C	C	D
3.3		A	B	B	B	C	C	D
4.7	A	B	B	B	C	C	D	D
6.8	B	B	B		C	D	D	
10	B	B		C		D		
15	B	C	C		D	D		
22		C		D	D			
33	C		D	D				
47		D	D					
68	D	D						
100	D							

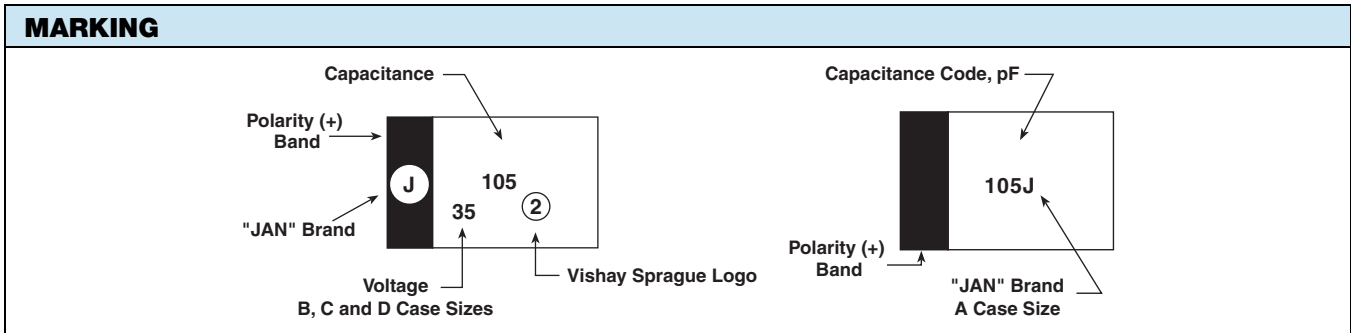

CAPACITANCE (μF)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE (μA) AT			MAX. DF 120 Hz (%) AT			MAX. ESR AT + 25 °C 100 kHz (Ω)
			+ 25 °C	+ 85 °C	+ 125 °C	+ 25 °C	+ 85 °C + 125 °C	- 55 °C	
<b>4 V<sub>DC</sub> AT + 85 °C; 2.7 V<sub>DC</sub> AT + 125 °C</b>									
2.2	A	CWR11C(5)225(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	8.0
4.7	A	CWR11C(5)475(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	8.0
6.8	B	CWR11C(5)685(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	5.5
10	B	CWR11C(5)106(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	4.0
15	B	CWR11C(5)156(1)(2)(3)(4)	0.6	6.0	7.2	6	9	9	3.5
33	C	CWR11C(5)336(1)(2)(3)(4)	1.3	13.0	15.6	6	9	9	2.2
68	D	CWR11C(5)686(1)(2)(3)(4)	2.7	27.0	32.4	6	9	9	1.1
100	D	CWR11C(5)107(1)(2)(3)(4)	4.0	40.0	48.0	8	12	12	0.9
<b>6 V<sub>DC</sub> AT + 85 °C; 4 V<sub>DC</sub> AT + 125 °C</b>									
1.5	A	CWR11D(5)155(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	8.0
2.2	A	CWR11D(5)225(1)(2)(3)(4)	0.5	5.0	6.0	6	6	9	8.0
3.3	A	CWR11D(5)335(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	8.0

**Note**

- Part number definitions:
  - Capacitance tolerance: J, K, M
  - Failure rate: B, C, D, M, P, R, S, T  
Exponential failure rate levels M, P, R, and S are inactive for new design per MIL-PRF-55365  
Capacitors qualified to Weibull failure rate levels are substitutable for exponential failure rate levels
  - Surge current (optional): A, B, C
  - Packaging: Blank, /HR, /PR, /PT
  - Termination: K - solder plated, H - solder fused



STANDARD RATINGS									
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE ( $\mu$ A) AT			MAX. DF 120 Hz (%) AT			MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )
			+ 25 °C	+ 85 °C	+ 125 °C	+ 25 °C	+ 85 °C + 125 °C	- 55 °C	
<b>6 V<sub>DC</sub> AT + 85 °C; 4 V<sub>DC</sub> AT + 125 °C</b>									
4.7	B	CWR11D(5)475(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	5.5
6.8	B	CWR11D(5)685(1)(2)(3)(4)	0.5	5.0	6.0	6	6	9	4.5
10	B	CWR11D(5)106(1)(2)(3)(4)	0.6	6.0	7.2	6	9	9	3.5
15	C	CWR11D(5)156(1)(2)(3)(4)	0.9	9.0	10.8	6	6	9	3.0
22	C	CWR11D(5)226(1)(2)(3)(4)	1.4	14.0	16.8	6	9	9	2.2
47	D	CWR11D(5)476(1)(2)(3)(4)	2.8	28.0	33.6	6	6	9	1.1
68	D	CWR11D(5)686(1)(2)(3)(4)	4.3	43.0	51.6	6	9	9	0.9
<b>10 V<sub>DC</sub> AT + 85 °C; 7 V<sub>DC</sub> AT + 125 °C</b>									
1.0	A	CWR11F(5)105(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	10.0
1.5	A	CWR11F(5)155(1)(2)(3)(4)	0.5	5.0	6.0	6	6	9	8.0
2.2	A	CWR11F(5)225(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	8.0
3.3	B	CWR11F(5)335(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	5.5
4.7	B	CWR11F(5)475(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	4.5
6.8	B	CWR11F(5)685(1)(2)(3)(4)	0.7	7.0	8.4	6	9	9	3.5
15	C	CWR11F(5)156(1)(2)(3)(4)	1.5	15.0	18.0	6	6	9	2.5
33	D	CWR11F(5)336(1)(2)(3)(4)	3.3	33.0	39.6	6	9	9	1.1
47	D	CWR11F(5)476(1)(2)(3)(4)	4.7	47.0	56.4	6	9	9	0.9
<b>15 V<sub>DC</sub> AT + 85 °C; 10 V<sub>DC</sub> AT + 125 °C</b>									
0.68	A	CWR11H(5)684(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	12.0
1.0	A	CWR11H(5)105(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	10.0
1.5	A	CWR11H(5)155(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	8.0
2.2	B	CWR11H(5)225(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	5.5
3.3	B	CWR11H(5)335(1)(2)(3)(4)	0.5	5.0	6.0	6	8	9	5.0
4.7	B	CWR11H(5)475(1)(2)(3)(4)	0.7	7.0	8.4	6	9	9	4.0
10	C	CWR11H(5)106(1)(2)(3)(4)	1.6	16.0	19.2	6	8	9	2.5
22	D	CWR11H(5)226(1)(2)(3)(4)	3.3	33.0	39.6	6	8	9	1.1
33	D	CWR11H(5)336(1)(2)(3)(4)	5.3	53.0	63.6	6	9	9	0.9
<b>20 V<sub>DC</sub> AT + 85 °C; 13 V<sub>DC</sub> AT + 125 °C</b>									
0.47	A	CWR11J(5)474(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	14.0
0.68	A	CWR11J(5)684(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	12.0
1.0	A	CWR11J(5)105(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	10.0
1.5	B	CWR11J(5)155(1)(2)(3)(4)	0.5	5.0	6.0	6	9	9	6.0
2.2	B	CWR11J(5)225(1)(2)(3)(4)	0.5	5.0	6.0	6	8	9	5.0
3.3	B	CWR11J(5)335(1)(2)(3)(4)	0.7	7.0	8.4	6	9	9	4.0
4.7	C	CWR11J(5)475(1)(2)(3)(4)	1.0	10.0	12.0	6	8	9	3.0
6.8	C	CWR11J(5)685(1)(2)(3)(4)	1.4	14.0	16.8	6	9	9	2.4
15	D	CWR11J(5)156(1)(2)(3)(4)	3.0	30.0	36.0	6	8	9	1.1
22	D	CWR11J(5)226(1)(2)(3)(4)	4.4	44.0	52.8	6	9	9	0.9
<b>25 V<sub>DC</sub> AT + 85 °C; 17 V<sub>DC</sub> AT + 125 °C</b>									
0.33	A	CWR11K(5)334(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	15.0
0.47	A	CWR11K(5)474(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	14.0
0.68	B	CWR11K(5)684(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	7.5
1.0	B	CWR11K(5)105(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	6.5
1.5	B	CWR11K(5)155(1)(2)(3)(4)	0.5	5.0	6.0	6	8	9	6.5
2.2	C	CWR11K(5)225(1)(2)(3)(4)	0.6	6.0	7.2	6	9	9	3.5
3.3	C	CWR11K(5)335(1)(2)(3)(4)	0.9	9.0	10.8	6	8	9	3.5
4.7	C	CWR11K(5)475(1)(2)(3)(4)	1.2	12.0	14.4	6	9	9	2.5
6.8	D	CWR11K(5)685(1)(2)(3)(4)	1.7	17.0	20.4	6	9	9	1.4
10	D	CWR11K(5)106(1)(2)(3)(4)	2.5	25.0	30.0	6	8	9	1.2
15	D	CWR11K(5)156(1)(2)(3)(4)	3.8	38.0	45.6	6	9	9	1.0

Note

- Part number definitions:
  - (1) Capacitance tolerance: J, K, M
  - (2) Failure rate: B, C, D, M, P, R, S, T  
Exponential failure rate levels M, P, R, and S are inactive for new design per MIL-PRF-55365  
Capacitors qualified to Weibull failure rate levels are substitutable for exponential failure rate levels
  - (3) Surge current (optional): A, B, C
  - (4) Packaging: Blank, /HR, /PR, /PT
  - (5) Termination: K - solder plated, H - solder fused




STANDARD RATINGS									
CAPACITANCE ( $\mu$ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE ( $\mu$ A) AT			MAX. DF 120 Hz (%) AT			MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )
			+ 25 °C	+ 85 °C	+ 125 °C	+ 25 °C	+ 85 °C + 125 °C	- 55 °C	
<b>35 V<sub>DC</sub> AT + 85 °C; 23 V<sub>DC</sub> AT + 125 °C</b>									
0.10	A	CWR11M(5)104(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	24.0
0.15	A	CWR11M(5)154(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	21.0
0.22	A	CWR11M(5)224(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	18.0
0.33	A	CWR11M(5)334(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	15.0
0.47	B	CWR11M(5)474(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	10.0
0.68	B	CWR11M(5)684(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	8.0
1.0	B	CWR11M(5)105(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	6.5
1.5	C	CWR11M(5)155(1)(2)(3)(4)	0.5	5.0	6.0	6	8	9	4.5
2.2	C	CWR11M(5)225(1)(2)(3)(4)	0.8	8.0	9.6	6	8	9	3.5
3.3	C	CWR11M(5)335(1)(2)(3)(4)	1.2	12.0	14.4	6	8	9	2.5
4.7	D	CWR11M(5)475(1)(2)(3)(4)	1.7	17.0	20.4	6	8	9	1.5
6.8	D	CWR11M(5)685(1)(2)(3)(4)	2.4	24.0	28.8	6	9	9	1.3
<b>50 V<sub>DC</sub> AT + 85 °C; 33 V<sub>DC</sub> AT + 125 °C</b>									
0.10	A	CWR11N(5)104(1)(2)(3)(4)	0.5	5.0	12.0	6	8	8	22.0
0.15	B	CWR11N(5)154(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	17.0
0.22	B	CWR11N(5)224(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	14.0
0.33	B	CWR11N(5)334(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	12.0
0.47	C	CWR11N(5)474(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	8.0
0.68	C	CWR11N(5)684(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	7.0
1.0	C	CWR11N(5)105(1)(2)(3)(4)	0.5	5.0	6.0	4	6	6	6.0
1.5	D	CWR11N(5)155(1)(2)(3)(4)	0.8	8.0	9.6	6	8	9	4.0
2.2	D	CWR11N(5)225(1)(2)(3)(4)	1.1	11.0	13.2	6	8	9	2.5
3.3	D	CWR11N(5)335(1)(2)(3)(4)	1.7	17.0	20.4	6	9	9	2.0
4.7	D	CWR11N(5)475(1)(2)(3)(4)	2.4	24.0	28.8	6	9	9	1.5

**Note**


- Part number definitions:
  - Capacitance tolerance: J, K, M
  - Failure rate: B, C, D, M, P, R, S, T  
Exponential failure rate levels M, P, R, and S are inactive for new design per MIL-PRF-55365  
Capacitors qualified to Weibull failure rate levels are substitutable for exponential failure rate levels
  - Surge current (optional): A, B, C
  - Packaging: Blank, /HR, /PR, /PT
  - Termination: K - solder plated, H - solder fused

RECOMMENDED VOLTAGE DERATING GUIDELINES (for temperatures below + 85 °C)	
STANDARD CONDITIONS. FOR EXAMPLE: OUTPUT FILTERS	
Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.0	3.6
10	6.0
15	10
20	12
25	15
35	24
50	28
SEVERE CONDITIONS. FOR EXAMPLE: INPUT FILTERS	
Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.0	3.0
10	5.0
15	7.5
20	10
25	12
35	15
50	24

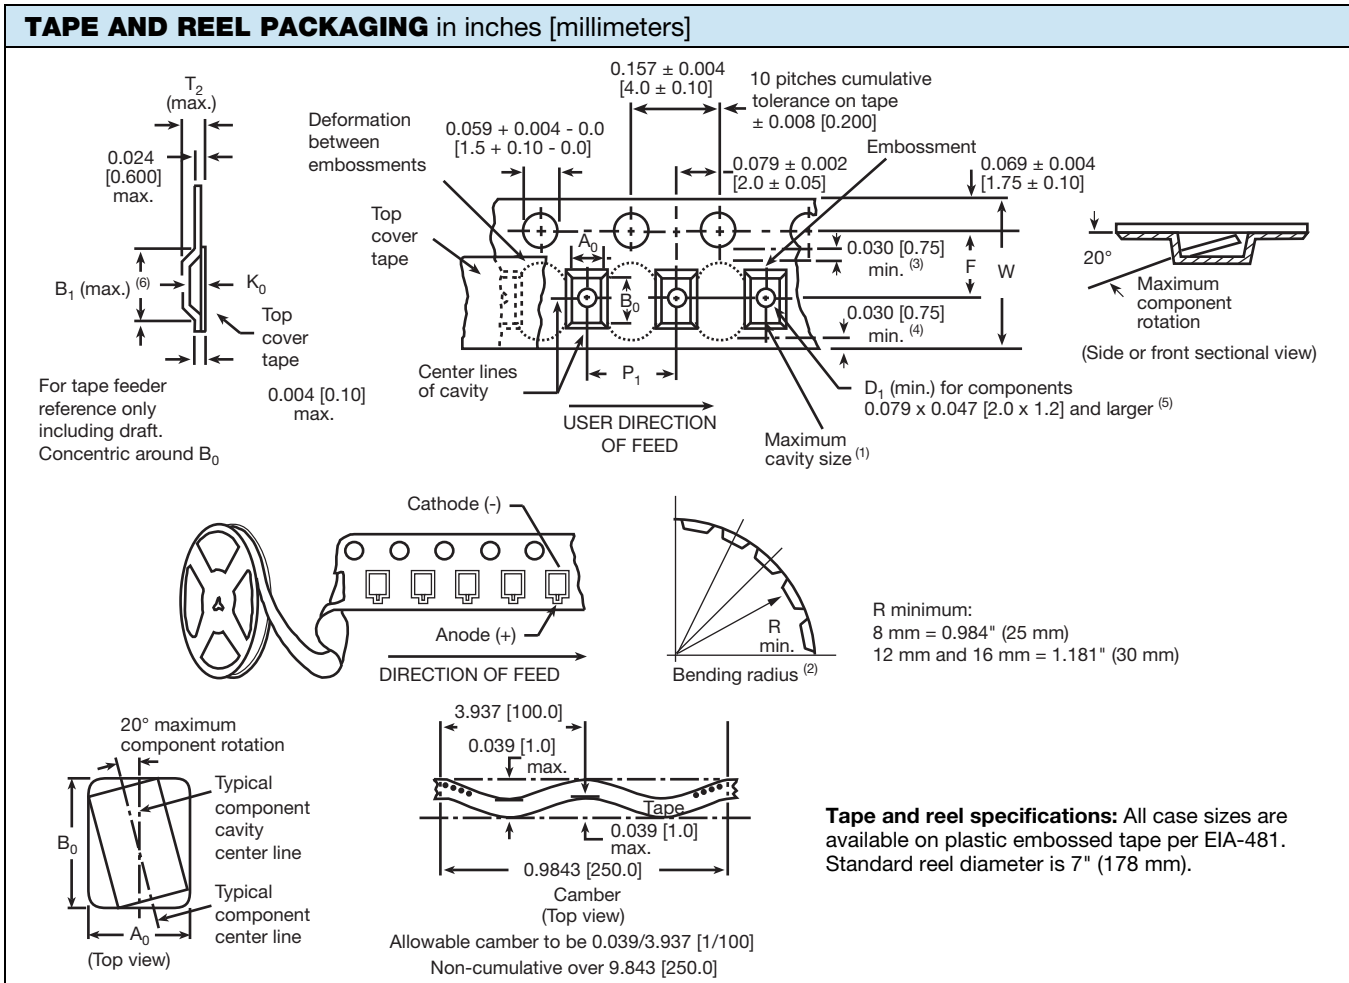
**Notes**

- Metric dimensions will govern. Dimensions in inches are rounded and for reference only.
- $A_0$ ,  $B_0$ ,  $K_0$ , are determined by the maximum dimensions to the ends of the terminals extending from the component body and/or the body dimensions of the component. The clearance between the ends of the terminals or body of the component to the sides and depth of the cavity ( $A_0$ ,  $B_0$ ,  $K_0$ ) must be within 0.002" (0.05 mm) minimum and 0.020" (0.50 mm) maximum. The clearance allowed must also prevent rotation of the component within the cavity of not more than 20°.
- Tape with components shall pass around radius "R" without damage. The minimum trailer length may require additional length to provide "R" minimum for 12 mm embossed tape for reels with hub diameters approaching N minimum.
- This dimension is the flat area from the edge of the sprocket hole to either outward deformation of the carrier tape between the embossed cavities or to the edge of the cavity whichever is less.
- This dimension is the flat area from the edge of the carrier tape opposite the sprocket holes to either the outward deformation of the carrier tape between the embossed cavity or to the edge of the cavity whichever is less.
- The embossed hole location shall be measured from the sprocket hole controlling the location of the embossement. Dimensions of embossement location shall be applied independent of each other.
- $B_1$  dimension is a reference dimension tape feeder clearance only.

<b>CARRIER TAPE DIMENSIONS</b> in inches [millimeters]							
CASE CODE	TAPE SIZE	$B_1$ (max.)	$D_1$ (min.)	F	$P_1$	$T_2$ (max.)	W
A, B	8 mm	0.165 [4.2]	0.039 [1.0]	$0.138 \pm 0.002$ [3.5 $\pm$ 0.05]	$0.157 \pm 0.004$ [4.0 $\pm$ 0.1]	0.094 [2.4]	$0.315 \pm 0.012$ [8.0 $\pm$ 0.30]
C, D	12 mm	0.323 [8.2]	0.059 [1.5]	$0.217 \pm 0.002$ [5.5 $\pm$ 0.05]	$0.315 \pm 0.004$ [8.0 $\pm$ 1.0]	0.177 [4.5]	$0.472 \pm 0.012$ [12.0 $\pm$ 0.30]

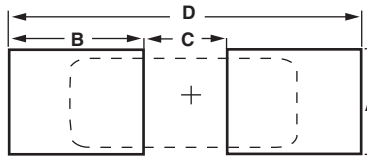**PAD DIMENSIONS** in inches [millimeters]


CASE CODE	A (min.)	B (nom.)	C (nom.)	D (nom.)
A	0.071 [1.80]	0.067 [1.70]	0.053 [1.35]	0.187 [4.75]
B	0.118 [3.00]	0.071 [1.80]	0.065 [1.65]	0.207 [5.25]
C	0.118 [3.00]	0.094 [2.40]	0.118 [3.00]	0.307 [7.80]
D	0.157 [4.00]	0.098 [2.50]	0.150 [3.80]	0.346 [8.80]

**POWER DISSIPATION**

CASE CODE	MAXIMUM PERMISSIBLE POWER DISSIPATION AT + 25 °C (W) IN FREE AIR
A	0.075
B	0.085
C	0.110
D	0.150

**STANDARD PACKAGING QUANTITY**

CASE CODE	UNITS PER REEL			BULK, PLASTIC TRAY QUANTITIES
	7" REEL	HALF 7" REEL (/HR)	PARTIAL 7" REEL (/PR)	
A	2000	1000	100	50
B	2000	1000	100	50
C	500	250	100	50
D	500	250	100	50

**Notes**

- Bulk capacitors are shipped in plastic trays
- T level capacitors are only shipped in tape and reel/or waffle packaging  
Contact factory for waffle pack quantities

**PRODUCT INFORMATION**

COTS Guide	<a href="http://www.vishay.com/doc?40083">www.vishay.com/doc?40083</a>
Pad Dimensions	
Packaging Dimensions	
Moisture Sensitivity	<a href="http://www.vishay.com/doc?40135">www.vishay.com/doc?40135</a>
<b>SELECTOR GUIDES</b>	
Solid Tantalum Selector Guide	<a href="http://www.vishay.com/doc?49053">www.vishay.com/doc?49053</a>
Solid Tantalum Chip Capacitors	<a href="http://www.vishay.com/doc?40091">www.vishay.com/doc?40091</a>
<b>FAQ</b>	
Frequently Asked Questions	<a href="http://www.vishay.com/doc?40110">www.vishay.com/doc?40110</a>



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**