

# KLP-32P-X-X

KLP-32P-x-x is a pastel-pink color LED, which has a blue LED chip and is encapsulated by epoxy mixed with phosphor.


### Features

- Redish epoxy Encapsulent
- Soft and Pastel Color

### Applications

- Display
- Indicator
- Decoration Lighting

### DIMENSIONS

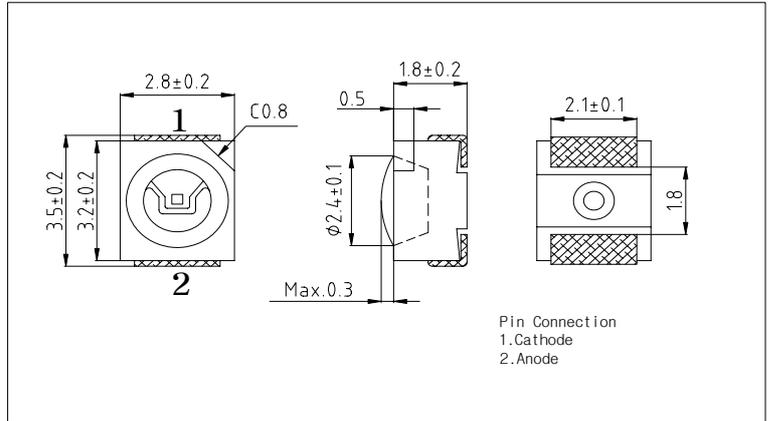

### Maximum Ratings

[ Ta=25°C ]

Parameter	Symbol	Ratings	Unit
Reverse Voltage (w/o Zener Option)	$V_R$	5	V
Reverse current ( w Zener Option)	$I_R$	50	mA
Forward current	$I_F$	30	mA
Pulse forward current <sup>*1</sup>	$I_{FP}$	0.1	A
Power dissipation	$P_D$	90	mW
Operating temperature	$T_{opr.}$	-30 ~ +85	°C
Storage temperature	$T_{stg.}$	-40 ~ +105	°C
Soldering Temperature <sup>*2</sup>	$T_{sol.}$	260	°C

\*1.  $I_{FP}$  Measured under duty  $\frac{1}{10}$  @ 1KHz

\*2. Soldering time  $\leq$  5 Sec


### Electro-Optical Characteristics

[ Ta=25°C ]


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	$V_F$	$I_F = 20 \text{ mA}$	-	3.5	-	V
Luminous Intensity	$I_v$	$I_F = 20 \text{ mA}$	550	650	-	mcd
Color Coordinate	x	$I_F = 20 \text{ mA}$	0.38	-	0.42	-
	y		0.28	-	0.32	
Half angle	$2\Delta\theta_{1/2}$	$I_F = 20 \text{ mA}$	-	120	-	deg.

**KLP-32P-X-X**


**Forward current vs. Ambient temperature**

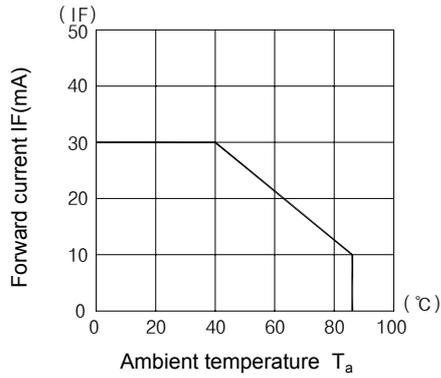


**Radiant Intensity vs. Forward current**

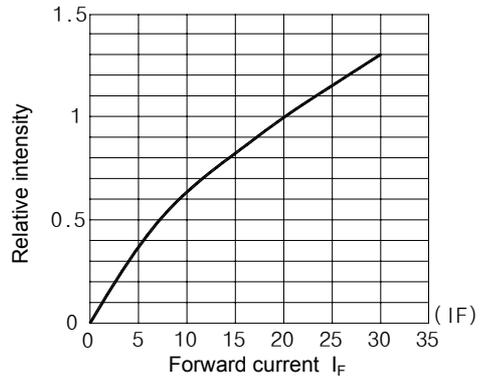


**Relative radiant intensity vs. Ambient temperature**

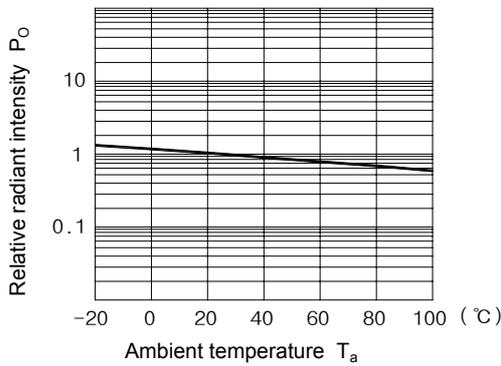

**Relative intensity vs. Wavelength**

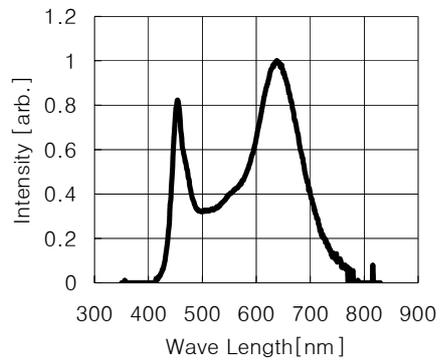

**Color Coordinate**

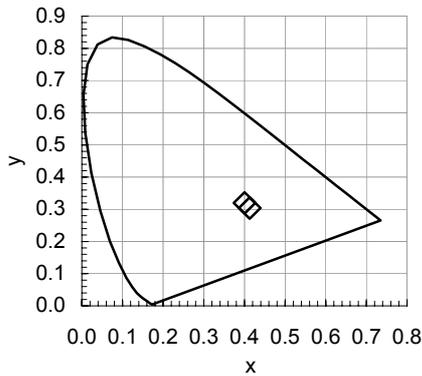

**Radiant Pattern**

