

GFWB4
FM + VHF Band

[Inquire](#)

Application

for Spurious reduction

Characteristics


GFWB4(Bulk Type)	
GFWB4-T(Taping Type)	
Zin/Zout	75 ohm Nominal
Pass Band	76 up to 222MHz
Insertion Loss	3.0dB max (76 up to 222MHz)
Ripple	2.0dB max (76 up to 222MHz)
Attenuation	10 dB min (0 up to 20MHz)
	15 dB min (350 up to 500MHz)

Number of ordered pieces

4000pcs/Box

Dimensions

Dimension (Unit : mm)

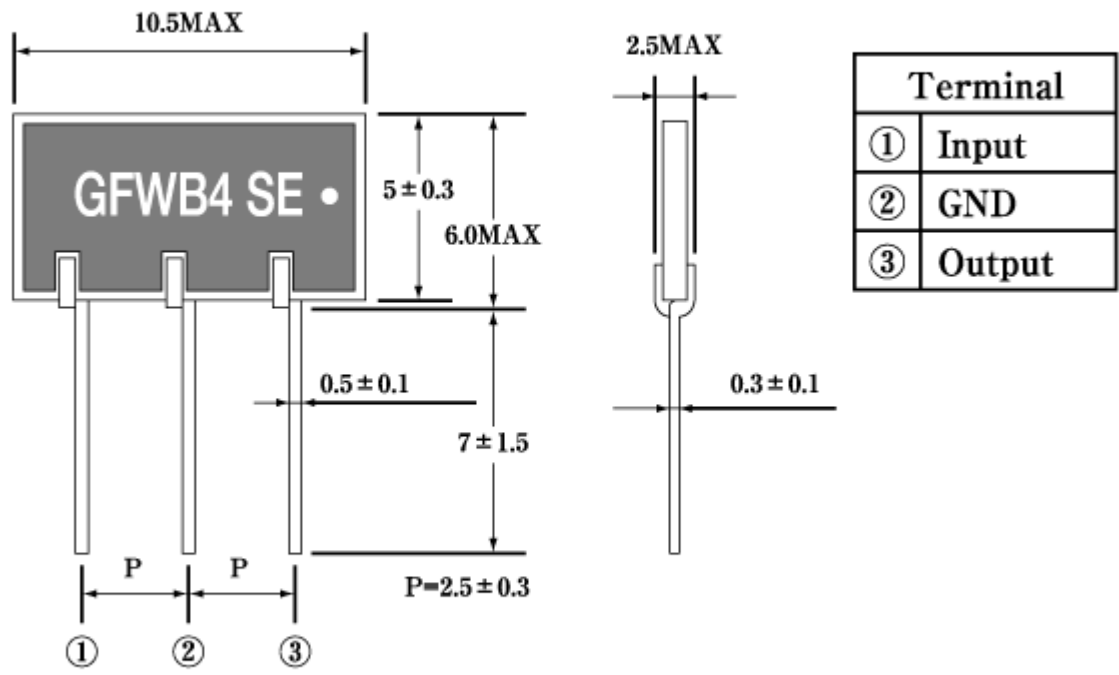

Frequency Data

