


ISOMETRIC

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2

(ON) = MOMENTARY

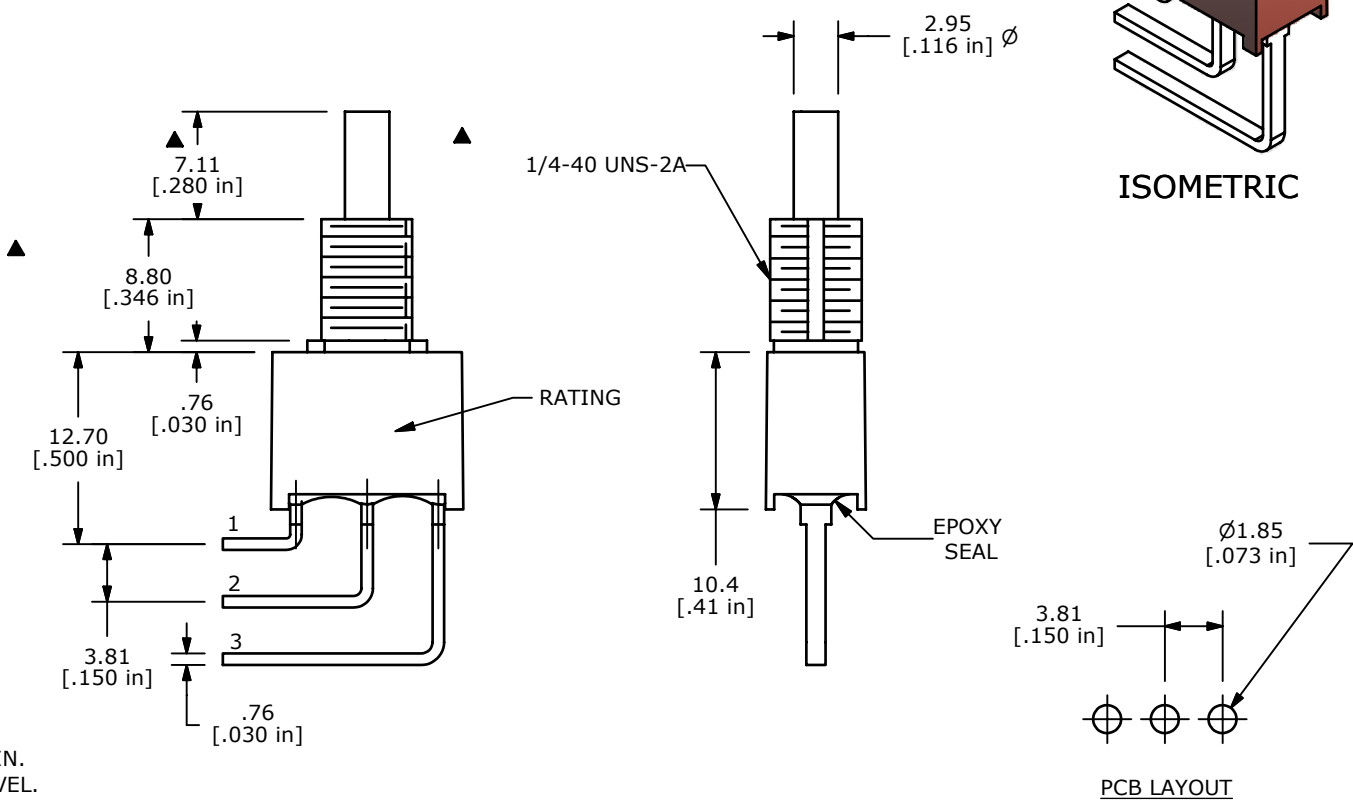

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - PLATING MATERIAL: SILVER
 - ▲ RATING: 3A @ 120VAC OR 28VDC
1A @ 250VAC
 - CONTACT RESISTANCE: 20 mOHMS
100 mA
 - LIFE EXPECTANCY: 50,000 MAKE-AND-BREAK
CYCLES Min. AT FULL LOAD.
 - INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 - DIELECTRIC STRENGTH: 1,500 V RMS @SEA LEVEL.
 - OPERATING TEMP.: -30°C to 75°C
 - 2002/95/EC (ROHS) COMPLIANT
 - ▲ DENOTES CRITICAL PARAMETER.
 - HARDWARE TO BE SHIPPED BULK
T100000 - HEXNUT - QTY 2
T100011 - LOCKWASHER - QTY 1
T100015 - LOCKRING - QTY 1

PCB LAYOUT



A	18005	RELEASED FOR PRODUCTION	3/14/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 700ASP7B10M7QEH				
SCALE 2:1	DATE 3/14/2008	DR BLR	DWG ST750104	REV A