
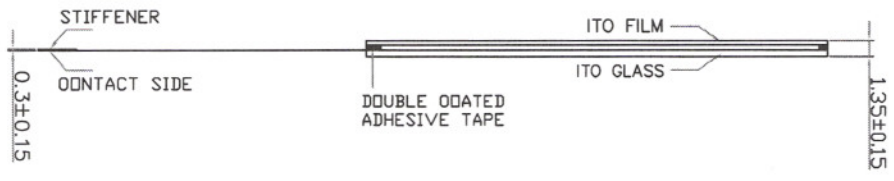



PRELIMINARY

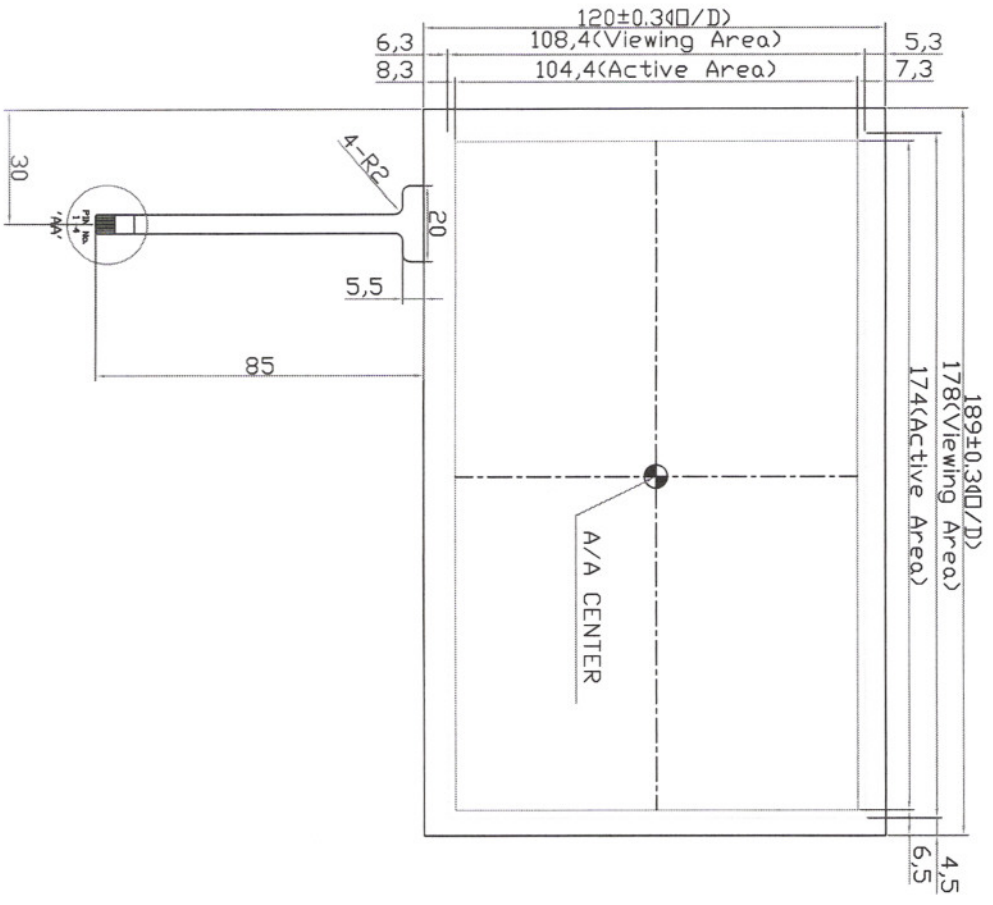

REMARK

- 1.Glass Thk: 1.1mm
- 2.Film Type: Non-Glare
- 3.Total Thk: 1.35±0.15mm
- 4.Linearity: ±1.5 or less
- 5.Transmittance: 80% or more
- 6.Resistance
- 100<Glass(Y)>X1200 ohm
- 100<Film(X)>X1200 ohm
- 7.Connector: FPC
- 8.General Tolerance: ±0.3


CIRCUIT DIAGRAM

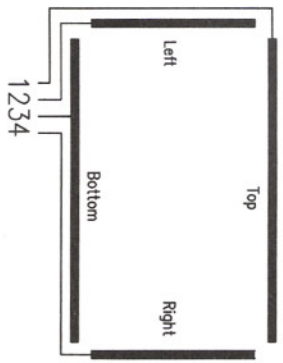

SIGNAL ASSIGNMENT

Pin No	Signal
1	Top
2	Left
3	Bottom
4	Right

Detail "AA"

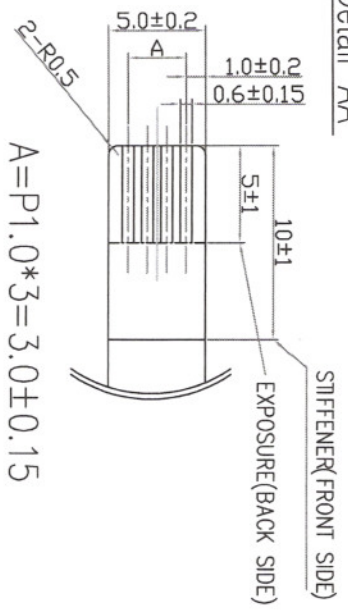

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at [www.hantouchUSA.com](http://www.hantouchUSA.com), under Incoming Inspection Standards.

REV. No.	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
0	NEW DRAW	06.01.07	H. V. LIM		

APPROVE	STD. TOL	UNIT	DRAWING NO.	REV.
CHECK	±0.3	SCALE		
DESIGN		NONE		
DRAW			8.0" TOUCH PANEL	1/1