



3-Terminal 1A Positive Voltage Regulator


LM7924

GENERAL DESCRIPTION

The LM7924 series of three terminal positive regulators are available in the TO-220 package and with several fixed output voltages, making them useful in a wide range of applications. Each type employs internal current limiting, thermal shut down and safe operating area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Parameter	Symbol	Typ	Unit
Input Voltage	V _I	-40	V
Output Voltage	V _O	-24	V
Peak Current	I _{PK}	-2.2	A
Operating Temperature Range	T _{OPR}	0~125	°C
Storage Temperature Range	T _{STG}	-65~150	°C

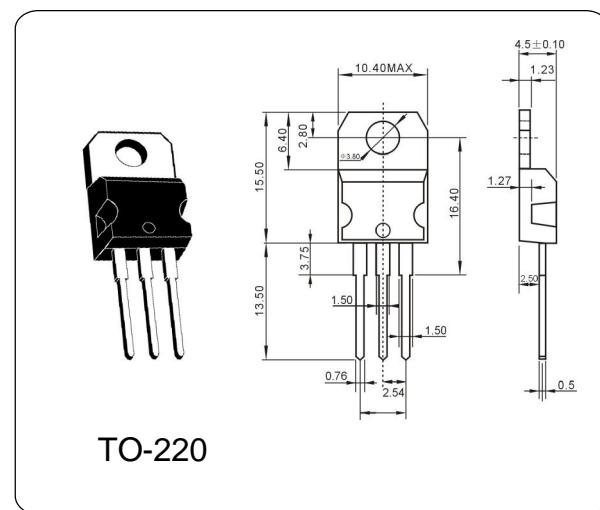

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

(Refer to test circuit, I_O = -500mA, V_I = -33V, C_i = 2.2uF, C_o = 1.0uF unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V _O	V _I = -27V to -38V	-23.28	-24	-24.72	V
Line Regulation (Note1)	Regline	V _I = -27V to -38V	—	-15	-480	mV
		V _I = -30V to -36V	—	-8.0	-240	
Load Regulation (Note1)	Regload	I _O = -5.0mA to -1.5A	—	-15	-480	mV
		I _O = -250mA to -750mA	—	-5	-240	
Quiescent Current	I _Q	T _J = +25 °C	—	-3	-6	mA
Quiescent Current Change	Δ I _Q	I _O = -5mA to -1A	—	—	-0.5	mA
		V _I = -27V to -38V	—	—	-1.0	
Ripple Rejection	RR	f = 120Hz, V _O = -27V to -37V	54	60	—	dB
Dropout Voltage	V _{Drop}	I _O = -1A, T _J = +25 °C	—	-2	—	V
Short Circuit Current	I _{SC}	V _I = -35V, T _A = +25 °C	—	-300	—	mA
Peak Current	I _{PK}	T _J = +25 °C	—	-2.2	—	A