

Surface Mount Aluminum Electrolytic Capacitors NACKA Series

FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- LOW IMPEDANCE AND WIDE TEMPERATURE
- LONG LIFE (5,000 HOURS @ 105°C)
- AVAILABLE WITH ANTI-VIBRATION WIDE TERMINATIONS
- DESIGNED FOR AUTOMATIC MOUNTING AND REFLOW SOLDERING



CHARACTERISTICS

Rated Voltage Range	6.3 ~ 100Vdc
Rated Capacitance Range	47 ~ 6,800 μ F
Operating Temperature Range	-55°C ~ +105°C
Capacitance Tolerance	\pm 20%(M)
Maximum Leakage Current after 2 minutes @ 20°C	0.01CV whichever is greater

RoHS
Compliant
includes all homogeneous materials

*See Part Number System for Details

Maximum Tan δ @ 120Hz/20°C	W.V. (Vdc)	6.3	10	16	25	35	50	63	80	100	
	S.V. (Vdc)	8.0	13	20	32	44	63	79	100	125	
	All Case Sizes	C \leq 1,000 μ F	0.26	0.19	0.16	0.14	0.12	0.12	0.10	0.08	0.07
		C = 1,500 μ F	-	-	0.16	0.16	0.12	-	-	-	-
		C = 2,200 μ F	-	0.21	-	0.16	-	-	-	-	-
		C = 3,300 μ F	0.30	-	0.20	0.18	-	-	-	-	-
C = 4,700 μ F		-	0.25	0.22	-	-	-	-	-	-	
C = 6,800 μ F	0.36	0.29	-	-	-	-	-	-	-		
Low Temperature Stability Impedance Ratio @ 120Hz	Z -25°C/Z +20°C	2	2	2	2	2	2	2	2	2	
	Z -40°C/Z +20°C	3	3	3	3	3	3	3	3	3	
	Z -55°C/Z +20°C	4	4	4	3	3	3	3	3	3	
Load Life Test @ 105°C 5,000 Hours	Capacitance Change	Within \pm 30% of initial measured value									
	Tan δ	Less than 200% of specified value									
	Leakage Current	Less than specified maximum value									
Shelf Life Test @ 105°C 1,000 Hours	Capacitance Change	Within \pm 30% of initial measured value									
	Tan δ	Less than 200% of specified value									
	Leakage Current	Less than specified maximum value									
Resistance to Soldering Heat Within Recommended Reflow Conditions	Capacitance Change	Within \pm 10% of initial measured value									
	Tan δ	Less than specified maximum value									
	Leakage Current	Less than specified maximum value									

STANDARD PRODUCT AND CASE SIZE D ϕ xL (mm)

Cap (μ F)	Code	Working Voltage (Vdc)								
		6.3	10	16	25	35	50	63	80	100
47	470	-	-	-	-	-	-	-	-	12.5x14
68	680	-	-	-	-	-	-	-	12.5x14	12.5x14
100	101	-	-	-	-	-	-	-	12.5x14	16x17
150	151	-	-	-	-	-	-	12.5x14	12.5x14	16x17
220	221	-	-	-	-	-	-	12.5x14	-	18x17
330	331	-	-	-	-	-	12.5x14	-	16x17	18x17
390	391	-	-	-	-	-	12.5x14	-	-	-
470	471	-	-	-	-	12.5x14	16x17	16x17	18x17	-
560	561	-	-	-	-	-	16x17	-	-	-
680	681	-	-	-	-	12.5x14	16x17	18x17	-	-
1000	102	-	-	-	12.5x14	16x17	16x17	-	-	-
1500	152	-	-	12.5x14	16x17	16x17	-	-	-	-
2200	222	-	12.5x14	-	16x17	-	-	-	-	-
3300	332	12.5x14	-	16x17	18x17	-	-	-	-	-
4700	472	-	16x17	18x17	-	-	-	-	-	-
6800	682	16x17	18x17	-	-	-	-	-	-	-

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.

Also found at www.niccomp.com/precautions

If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com




Surface Mount Aluminum Electrolytic Capacitors NACKA Series

STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number*	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Ripple Current (mA) +105°C/100KHz	Max. Impedance (Ω) +20°C/100KHz	Load Life Hours @ +105°C
NACKA332M6.3V12.5X14TR13F	3300	6.3	0.30	1100	0.060	5,000
NACKA682M6.3V16X17TR13F	6800		0.36	1800	0.035	5,000
NACKA222M10V12.5X14TR13F	2200	10	0.21	1100	0.060	5,000
NACKA472M10V16X17TR13F	4700		0.25	1800	0.035	5,000
NACKA682M10V18X17TR13F	6800	16	0.29	2060	0.033	5,000
NACKA152M16V12.5X14TR13F	1500		0.16	1100	0.060	5,000
NACKA332M16V16X17TR13F	3300	16	0.20	1800	0.035	5,000
NACKA472M16V18X17TR13F	4700		0.22	2060	0.033	5,000
NACKA102M25V12.5X14TR13F	1000	25	0.14	1100	0.060	5,000
NACKA152M25V16X17TR13F	1500		0.16	1800	0.035	5,000
NACKA222M25V16X17TR13F	2200		0.16	1800	0.035	5,000
NACKA332M25V18X17TR13F	3300		0.18	2060	0.033	5,000
NACKA471M35V12.5X14TR13F	470	35	0.12	1100	0.060	5,000
NACKA681M35V12.5X14TR13F	680		0.12	1100	0.060	5,000
NACKA102M35V16X17TR13F	1000		0.12	1800	0.035	5,000
NACKA152M35V16X17TR13F	1500		0.12	1800	0.035	5,000
NACKA331M50V12.5X14TR13F	330	50	0.12	900	0.120	5,000
NACKA391M50V12.5X14TR13F	390		0.12	900	0.120	5,000
NACKA471M50V16X17TR13F	470		0.12	1610	0.073	5,000
NACKA561M50V16X17TR13F	560		0.12	1610	0.073	5,000
NACKA681M50V16X17TR13F	680		0.12	1610	0.073	5,000
NACKA102M50V16X17TR13F	1000		0.12	1610	0.073	5,000
NACKA151M63V12.5X14TR13F	150	63	0.10	800	0.160	5,000
NACKA221M63V12.5X14TR13F	220		0.10	800	0.160	5,000
NACKA471M63V16X17TR13F	470		0.10	1410	0.082	5,000
NACKA681M63V18X17TR13F	680		0.10	1680	0.080	5,000
NACKA680M80V12.5X14TR13F	68	80	0.08	500	0.320	5,000
NACKA101M80V12.5X14TR13F	100		0.08	500	0.320	5,000
NACKA151M80V12.5X14TR13F	150		0.08	500	0.320	5,000
NACKA331M80V16X17TR13F	330		0.08	793	0.170	5,000
NACKA471M80V18X17TR13F	470		0.08	917	0.153	5,000
NACKA470M100V12.5X14TR13F	47	100	0.07	500	0.320	5,000
NACKA680M100V12.5X14TR13F	68		0.07	500	0.320	5,000
NACKA101M100V16X17TR13F	100		0.07	793	0.170	5,000
NACKA151M100V16X17TR13F	150		0.07	793	0.170	5,000
NACKA221M100V18X17TR13F	220		0.07	917	0.153	5,000
NACKA331M100V18X17TR13F	330		0.07	917	0.153	5,000


PART NUMBER SYSTEM

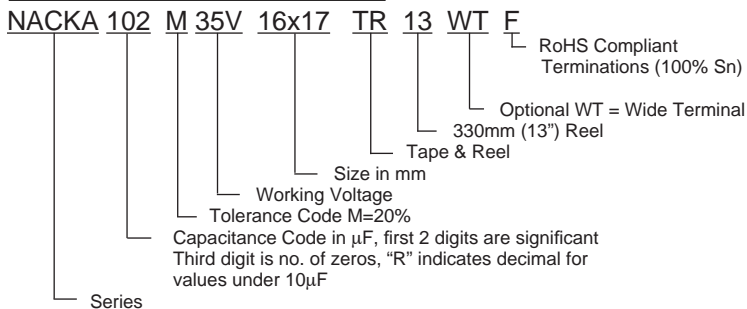

Surface Mount Aluminum Electrolytic Capacitors NACKA Series

DIMENSIONS (mm)


Case Size	D ϕ ± 0.5	L max.	A, B ± 0.2	H max.	I ± 0.3	P ± 0.3	W	R	S	T
12.5 x 14	12.5	14.0	13.5	15.0	4.7	4.4	0.90 \pm 0.30	-	-	-
16 x 17	16.0	17.0	17.0	19.0	5.5	6.7	1.20 \pm 0.30	-	-	-
18 x 17	18.0	17.0	19.0	21.0	6.7	6.7	1.20 \pm 0.30	-	-	-
12.5 x 14WT	12.5	14.3	13.5	15.0	4.7	4.4	1.20 \pm 0.30	2.2 \pm 0.2	7.1 \pm 0.2	2.4 \pm 0.2
16 x 17WT	16.0	17.3	17.0	19.0	5.5	6.7	1.40 \pm 0.20	3.0 \pm 0.2	9.0 \pm 0.2	1.9 \pm 0.2
18 x 17WT	18.0	17.3	19.0	21.0	6.7	6.7	1.40 \pm 0.20	3.0 \pm 0.2	11.0 \pm 0.2	1.9 \pm 0.2

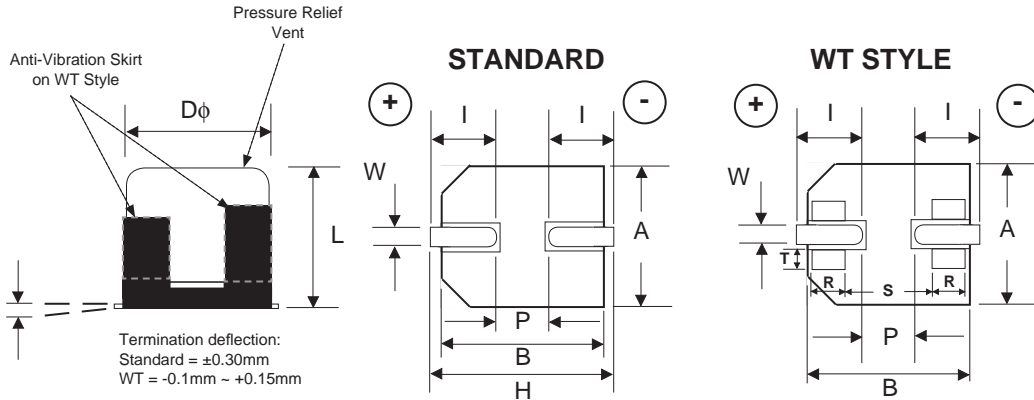


LAND PATTERN DIMENSIONS (mm)

Case Size	A	B	C	D	E	F	G	H
12.5x14	4.0	5.7	2.0	-	-	-	-	-
16x17	6.0	6.5	2.5	-	-	-	-	-
18x17	6.0	7.5	2.5	-	-	-	-	-
12.5x14WT	3.9	6.0	6.9	2.8	1.3	1.9	2.2	2.5
16x17WT	5.8	6.8	6.2	3.6	1.3	1.9	1.7	2.8
18x17WT	5.8	7.3	6.2	3.6	1.8	1.9	1.7	2.8

STANDARD TERMINATION

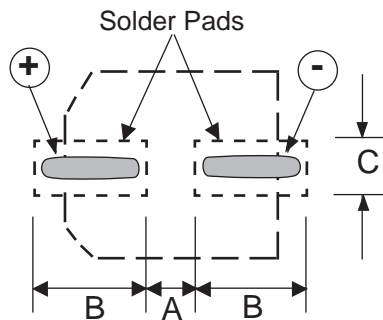

WT STYLE TERMINATION

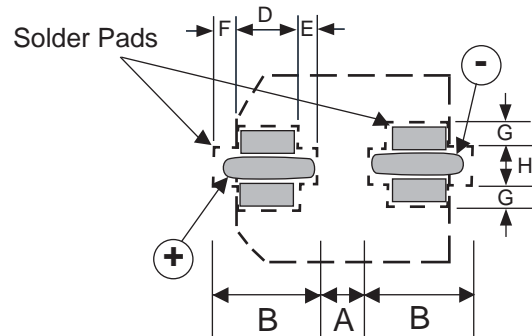

Review & Compare Reflow Soldering Heat Limits
V-chip SMT Aluminum Electrolytic Capacitors
www.nicomp.com/RSL




Surface Mount Aluminum Electrolytic Capacitors NACKA Series

PEAK REFLOW TEMPERATURE AND DURATION

Diameter	Rated Voltage	Time above 217°C	Time above 240°C	Peak Temperature	Max. Number of Reflow Passes
φ12.5~18	6.3V~35V	90 sec. max.	30 sec. max.	245°C max.	2*
	50V~63V	30 sec. max.	5 sec. max.	245°C max.	2*
	80V~100V	30 sec. max.	5 sec. max.	245°C max.	1

*Second reflow shall be at least one hour after natural cool to room temperature.


Note: VPS Soldering is not recommended

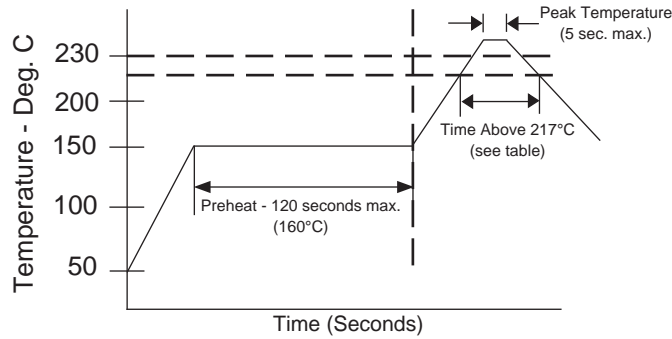

TAPING SPECIFICATIONS (mm)

- Both Leader and Trailer tape: Minimum 40mm (1.57") empty carrier tape pockets.
- Leader tape: Approximately 20cm of cover tape at leader.
- Connection: Maximum 3 connections (slices) per reel.

Case Size	A	B	C	F	P	T	t
12.5x14	±0.5	±0.5	±0.3	±0.1	±0.1	±0.2	±0.1
16x17	17.5	17.5	44.0	20.2	28.0	17.5	0.5
18x17	19.5	19.5	44.0	20.2	32.0	17.5	0.5

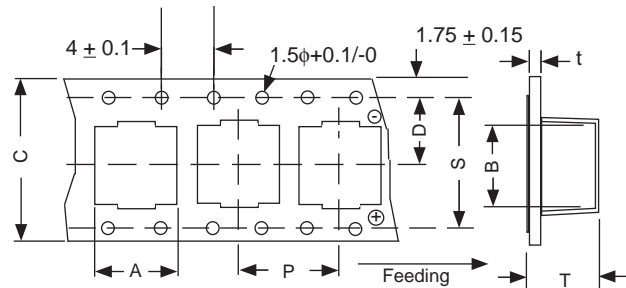

REEL DIMENSIONS (mm)

Case Size	W ±1.0	Qty per Reel	
		13" (330mm)	
12.5x14	34	200	
16x17	46	125	
18x17	46	125	

