


Drosseln für Netzanwendungen

Chokes for Power Lines


Stromkompensierte Ringkerndrosseln

Current-compensated ring core chokes

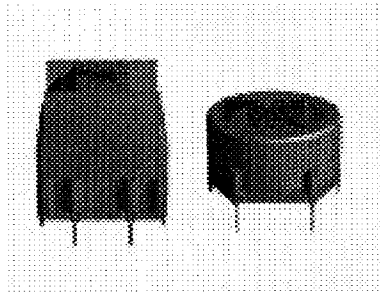


Zweifach-Drosseln

- ☒ Kunststoffbecher, vergossen (UL 94 V-0)¹⁾
- ☒ Stifte im Rastermaß

Nennspannung 250 V~
 L-Toleranz ±30%²⁾
 IEC-Klimakategorie 40/125/56
 Prüfzeichen 

Double chokes

- ☒ Plastic case, potted (UL 94 V-0)¹⁾
- ☒ Pins fitting standard PCB grid

Rated voltage 250 Vac
 L tolerance ±30%²⁾
 IEC climatic category 40/125/56
 Approvals 

Baupform Type	N I _N A	L _N L _p mH	L _S typ μH	R _{typ} mΩ	Maße Dimensions l × b × h mm	Bestellnummer / Ordering code	
						Liegend Horizontal version	Stehend Vertical version
B82721	0,4	39	450	2000	17,3 × 17,9 × 12,6 (liegend/horizontal) 18,2 × 13,2 × 20,3 (stehend/vertical)	B82721-A2401-N20	B82721-K2401-N20
	0,4	27	270	1700		B82721-A2401-N21	B82721-K2401-N21
	0,5	18	260	1500		B82721-A2501-N1	B82721-K2501-N1
	0,7	10	90	600		B82721-A2701-N20	B82721-K2701-N20
	1,2	6,8	70	280		B82721-A2122-N20	B82721-K2122-N20
	1,5	3,3	37	190		B82721-A2152-N1	B82721-K2152-N1
	2,0	1,0	13	90		B82721-A2202-N1	B82721-K2202-N1
	2,6	0,4	6	60		B82721-A2262-N1	B82721-K2262-N1
B82722	0,3	47	760	2500	22,3 × 22,7 × 13,3 (liegend/horizontal) 23,3 × 16,1 × 25,4 (stehend/vertical)	B82722-A2301-N1	B82722-J2301-N1
	0,5	27	430	1200		B82722-A2501-N1	B82722-J2501-N1
	1	10	140	480		B82722-A2102-N1	B82722-J2102-N1
	2	2,2	30	130		B82722-A2202-N1	B82722-J2202-N1
	3	1,2	17	56		B82722-A2302-N1	B82722-J2302-N1
B82723	0,5	56	870	2200	27,0 × 28,0 × 16,8 (liegend/horizontal) 28,0 × 18,6 × 30,5 (stehend/vertical)	B82723-A2501-N1	B82723-J2501-N1
	1	27	440	750		B82723-A2102-N1	B82723-J2102-N1
	2	5,6	80	160		B82723-A2202-N1	B82723-J2202-N1
	4	2,7	30	60		B82723-A2402-N1	B82723-J2402-N1
B82724-A/J	0,5	82	1000	2700	32,6 × 33,1 × 19,7 (liegend/horizontal) 31,3 × 18,5 × 33,2 (stehend/vertical)	B82724-A2501-N1	B82724-J2501-N1
	1	33	420	810		B82724-A2102-N1	B82724-J2102-N1
	1,4	27	310	500		B82724-A2142-N1	B82724-J2142-N1
	2	6,8	80	190		B82724-A2202-N1	B82724-J2202-N1
	4	3,3	40	66		B82724-A2402-N1	B82724-J2402-N1
B82724-E Öko-Drossel Eco choke	0,5	82	950	2100	33,1 × 32,6 × 19,7 (liegend/horizontal)	B82724-E2501-N1	
	1	33	400	650		B82724-E2102-N1	
	1,4	27	280	370		B82724-E2142-N1	
	2	6,8	75	190		B82724-E2202-N1	
	4	3,3	35	55		B82724-E2402-N1	
B82724-B	1	47	550	880	33,6 × 32,6 × 25 (liegend/horizontal)	B82724-B2102-N1	
	2	10	110	230		B82724-B2202-N1	
	4	3,9	40	58		B82724-B2402-N1	
	6	1,8	16	23		B82724-B2602-N1	
	B82725	1	68	900		1300	42,4 × 44,0 × 25 (liegend/horizontal)
2		18	230	350	B82725-A2202-N1		
4		6,8	80	87	B82725-A2402-N1		
6		3,9	45	41	B82725-A2602-N1		
8		2,7	30	22	B82725-A2802-N1		
10		1,8	20	14	B82725-A2103-N1		

1) Ausgenommen Öko-Drossel B82724-E / Except eco choke B82724-E

2) Öko-Drossel: -30/+50% / Eco choke: -30/+50%