


20 Amp



IP67 Shown

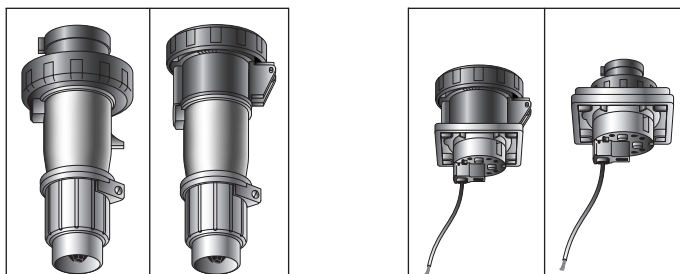

	Poles & Wires	Configuration			Voltage/ Color Coding	Plug	Connector	Cable O.D. Range Inches	Receptacle*	Inlet*
		Receptacle/ Connector	Plug/ Inlet	Clock Hour						
WATERTIGHT IP67	2P3W			4h	125	RS320P4W	RS320C4W	.57-.71	RS320R4W	RS320B4W
	2P3W			6h	250	RS320P6W	RS320C6W	.57-.71	RS320R6W	RS320B6W
	2P3W			5h	277	RS320P5W	RS320C5W	.57-.71	RS320R5W	RS320B5W
	2P3W			7h	480	RS320P7W	RS320C7W	.57-.71	RS320R7W	RS320B7W
	3P4W			12h	125/250	RS420P12W	RS420C12W	.57-.71	RS420R12W	RS420B12W
	3P4W			9h	3Ø250	RS420P9W	RS420C9W	.57-.71	RS420R9W	RS420B9W
	3P4W			7h	3Ø480	RS420P7W	RS420C7W	.57-.71	RS420R7W	RS420B7W
	3P4W			5h	3Ø600	RS420P5W	RS420C5W	.57-.71	RS420R5W	RS420B5W
	4P5W			9h	3ØY120/208	RS520P9W	RS520C9W	.57-.71	RS520R9W	RS520B9W
	4P5W			7h	3ØY277/480	RS520P7W	RS520C7W	.57-.71	RS520R7W	RS520B7W
	4P5W			5h	3ØY347/600	RS520P5W	RS520C5W	.57-.71	RS520R5W	RS520B5W

IP44 Construction: No screw collars on male devices; female devices have flap covers only.

SPLASHPROOF IP44	2P3W			4h	125	RS320P4S	RS320C4S	.57-.71	RS320R4S	RS320B4S
	2P3W			6h	250	RS320P6S	RS320C6S	.57-.71	RS320R6S	RS320B6S
	2P3W			5h	277	RS320P5S	RS320C5S	.57-.71	RS320R5S	RS320B5S
	3P4W			12h	125/250	RS420P12S	RS420C12S	.57-.71	RS420R12S	RS420B12S
	3P4W			9h	3ph.250	RS420P9S	RS420C9S	.57-.71	RS420R9S	RS420B9S
	4P5W			9h	3ph.120/208	RS520P9S	RS520C9S	.57-.71	RS520R9S	RS520B9S

*See Page 81 for back box/mounting options.

UL Listing E2630, E47956
UL Classification E205590

Liquidtight Conduit Adapter Kit

2LTK4C50 20A 3 & 4PW 1/2" NPT
3LTK4C75 20A 5W 3/4" NPT