


## TERMINAL BLOCKS

- 3.5mm Pitch
- Low profile
- UL94V-0 Flame retardant material
- 0.75mm<sup>2</sup> wire acceptance
- UL/CSA approved
- Interlocking
- Professional rising clamp

## 3.5mm PITCH VERTICAL MOUNT - LOW PROFILE

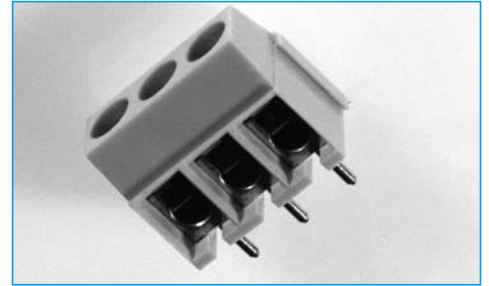


## SPECIFICATION

**Rating:** 9A/130 Vac  
**Dielectric Strength:** 1.5KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant nylon 66

**Pin/terminal:** 5 micron tinned nickel plated brass  
**Rising clamp:** 5 Nickel flashed brass  
**Screw/torque:** M2 steel/0.3Nm 6 micron zinc colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.1mm

## OUTLINE DRAWING

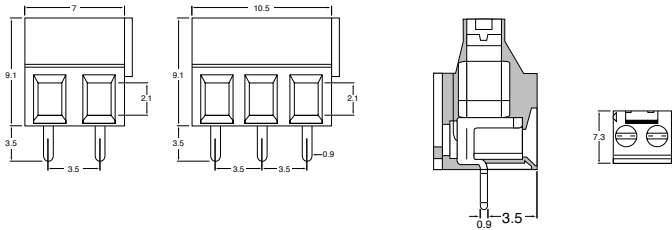

## ORDERING INFORMATION

DBC	TB	1	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways
			2 = 2 ways 3 = 3 ways

## TERMINAL BLOCKS

- 3.5mm Pitch
- Ultra Low Profile
- Flame Retardant Material
- 1mm<sup>2</sup> wire acceptance
- UL/ CSA approved
- Interlocking
- Screw terminal



## 3.5mm PITCH VERTICAL MOUNT




## SPECIFICATION

**Rating:** 10A/125V  
**Dielectric Strength:** 1.5KV  
**Insulation Resistance:** ≥5MΩ/1000V  
**Working temperature:** -33°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant PA66

**Pin/terminal:** 5μ tinned, nickel plated copper flash brass  
**Wire protector:** Nickel plated brass  
**Screw/torque:** M2 steel, 5μ zinc & colour passivated and tropicalised/0.4Nm max  
**Recommended PCB hole size:** ø1.1mm

## OUTLINE DRAWING

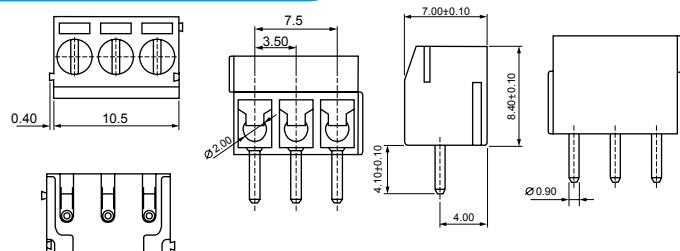

## ORDERING INFORMATION

DBC	TB	56	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways
			2 = 2 ways 3 = 3 ways

\* Other Number of ways are available up to 12  
 Please consult office for further details