


HIGH VOLTAGE - HIGH CURRENT SILICON RECTIFIERS

DIFFUSED SILICON JUNCTIONS

PRV 8,000 TO 60,000 VOLTS

AVALANCHE CHARACTERISTICS

LOW LEAKAGE

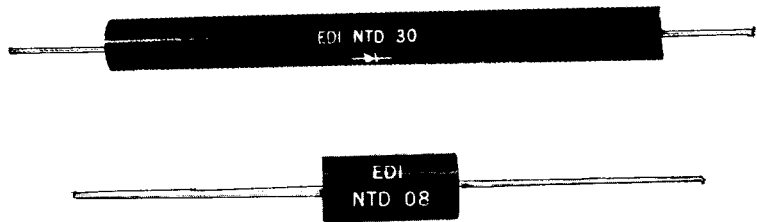

EDI Type No.	Peak Reverse Voltage PRV (Volts)	Avg. Fwd. Current, I_O at 50°C (mA)	Max. Fwd. Voltage Drop at 25°C and I_O V_F (Volts)	Length "L" FIG. 3
NTD 08	8,000	300	12	1.00
NTD 10	10,000	300	15	1.25
NTD 12	12,000	300	18	1.50
NTD 15	15,000	300	24	2.00
NTD 20	20,000	300	30	2.50
NTD 25	25,000	300	38	3.00
NTD 30	30,000	300	45	3.75
NTD 35	35,000	300	54	4.00
NTD 40	40,000	300	60	5.00
NTD 45	45,000	300	70	6.25
NTD 50	50,000	300	76	6.25
NTD 60	60,000	300	83	8.00

ELECTRICAL CHARACTERISTICS (at $T_A = 25^\circ\text{C}$ Unless Otherwise Specified)

Max. DC Reverse Current @PRV and 25°C, I_R	1 μA
Max. DC Reverse Current @PRV and 100°C, I_R	100 μA
Ambient Operating Temperature Range, T_A	-55°C to +125°C
Storage Temperature Range, T_{STG}	-55°C to +150°C
Max. One-Half Cycle Surge Current, I_{FM} (Surge) @ 60 Hz	20 Amps



ELECTRONIC DEVICES, INC.

21 GRAY OAKS AVENUE • YONKERS, NEW YORK 10710
914-965-4400 • FAX 914-965-5531 • 1-800-678-0828
e-mail: sales@edidiodes.com • website: www.edidiodes.com



FIG. 1
OUTPUT CURRENT vs. AMBIENT TEMPERATURE

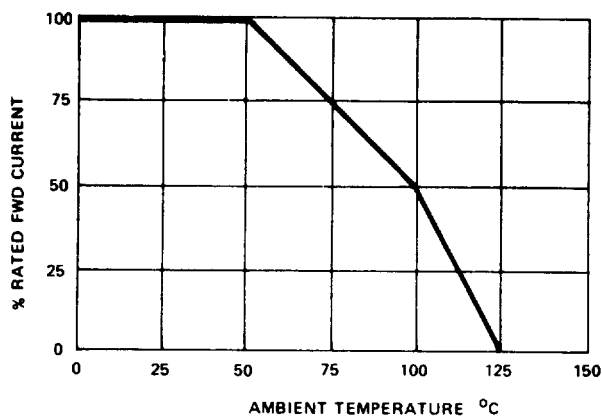


FIG. 2
NON-REPETITIVE SURGE CURRENT RATINGS


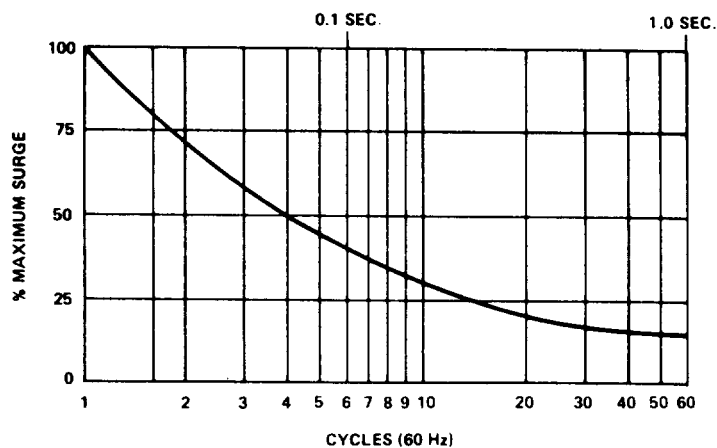


FIG. 3
PACKAGE STYLE

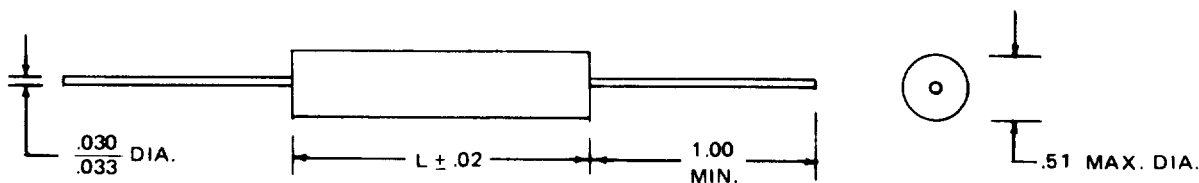

ALL DIMENSIONS IN INCHES

Maximum lead and terminal temperature for soldering, 3/8 inch from case, 5 seconds at 250°C.

EDI reserves the right to change these specifications at any time without notice.