



LEAD FINISH: SOLDER	
BUSHING FINISH: SILVER	
CAPACITANCE	2000 pF GMV.
TEMP. RANGE	-55°C TO 125°C
CURRENT	25 AMP MAX.
WORKING VOLTAGE	85°C 1000 VDC MAX. 125°C 700 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHZ	I.L. (db)
1	---
10	10
100	50
1 GHz	60
10 GHz	

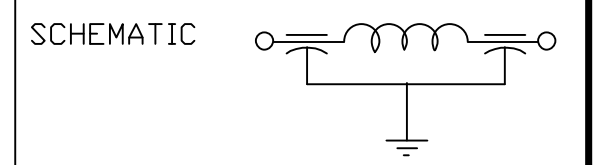

PART: S005 (FAIRVIEW)  
S005M (MEXICO)

BAG: 1202-005  
XXX DATE CODE  
XXX QTY./BAG  
(50/ BAG MAX.)

- NOTES:
1. HARDWARE IS INCLUDED
  2. MAXIMUM MOUNTING TORQUE=7LBS-IN
  3. SUGGESTED MOUNTING HOLE  $\phi$ .328[8.34]
  4. PRE FLATTEN/NOTCH DIMENSIONS  
TOP-.542±.010  
BOTTOM-.730±.010

	13	12	11	10	9	8	7	6	5	4	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC. FAIRVIEW PENNSYLVANIA		
	CN 46146-ENG	CN 43768-ENG	CN 32412-CPD	CN 10966-CPD	CN 214669	CN 203110	CN 200140	CN 188312	CN 186249	CN 185001	CHANGE NOTICE	Fractions ± 1/64		Dwn. KRDZALIC	Description Pi
						REDRAWN				REDRAWN		Dec. .xx±		Date 1-14-09	RESIN SEAL FILTER
												Dec. .xxx±.010		Engr. J. JUSTKA	1202-005
												Angles ±0° 30'		Scale NONE	
												CODE IDENT. NO. DLSP2			