


# 1SS389

## ■ Features

- Small Package
- Low Forward Voltage  $V_F = 0.23V$ (TYP.) @ $I_F = 5\text{ mA}$

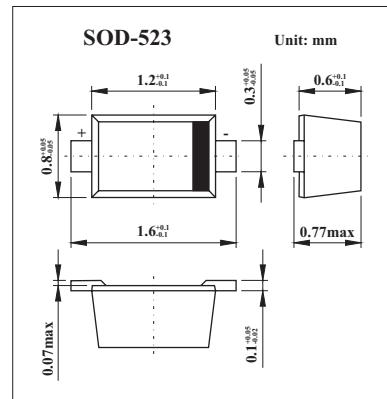

## ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Characteristic	Symbol	Rating	Unit
Maximum (Peak) reverse voltage	$V_{RM}$	15	V
Reverse voltage	$V_R$	10	V
Maximum (Peak) forward current	$I_{FM}$	200	mA
Average forward current	$I_o$	100	mA
Surge current (10 ms)	$I_{FSM}$	1	A
Power dissipation	$P^*$	150	mW
Junction temperature	$T_j$	125	$^\circ\text{C}$
Storage temperature range	$T_{stg}$	-55 to + 125	$^\circ\text{C}$
Operating temperature range	$T_{opr}$	-44 to +100	$^\circ\text{C}$

\* : Mounted on a glass epoxy circuit board of 20 □ 20mm, pad dimension of 4 □ 4mm.

## ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Characteristic	Symbol	Conditions	Min	Typ	Max	Unit
Continuous forward voltage	$V_F$	$I_F = 1\text{ mA}$		0.18		V
		$I_F = 10\text{ mA}$		0.23	0.3	
		$I_F = 100\text{ mA}$		0.35	0.5	
Reverse current	$I_R$	$V_R = 10\text{ V}$			20	$\mu\text{ A}$
Total capacitance	$C_T$	$V_R = 0\text{ V}, f = 1\text{ MHz}$		20	40	pF

## ■ Marking

Marking	S4
---------	----