



# ABS2 THRU ABS10


Single Phase 0.8Amp Surface Mount Glass Passivated Bridge Rectifier

## Features

- Glass passivated die construction
- Low forward voltage drop
- High current capability
- High surge current capability
- Designed for surface mount application
- Plastic material-UL flammability 94V-O

## Mechanical Data

- Case: SOPA-4, molded plastic
- Terminals: plated leads solderable per MIL-STD-202, Method 208
- Polarity: as marked on case
- Mounting position: Any
- Marking: type number

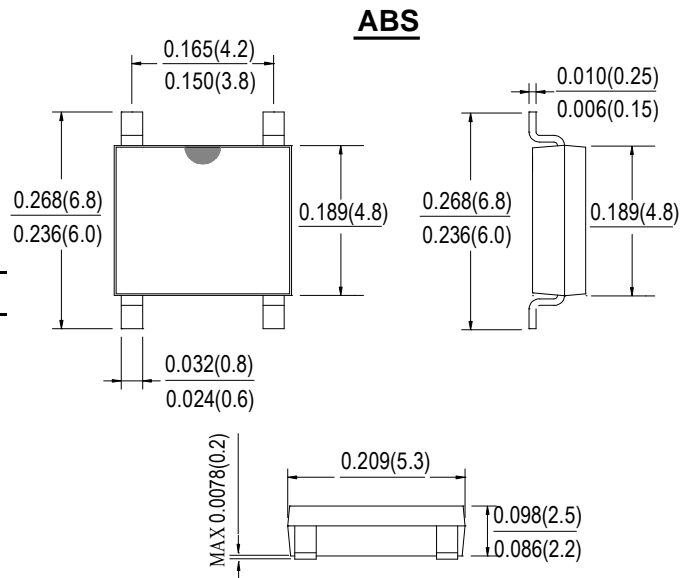

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	ABS2	ABS4	ABS6	ABS8	ABS10	UNITS
Peak Repetitive Reverse Voltage	$V_{RM}$						
Working Peak Reverse Voltage	$V_{RWM}$	200	400	600	800	1000	V
DC Blocking Voltage	$V_{DC}$						
RMS Reverse Voltage	$V_{RMS}$	140	280	420	560	700	V
Average Rectified Output Current (Note 1)@ $T_A=30^\circ C$ (Note 2)@ $T_A=30^\circ C$	$I_o$			0.5 0.8			A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$			30			A
Forward Voltage per element @ $I_F=0.4A$	$V_{FM}$			0.95			V
Peak Reverse Current @ $T_A=25^\circ C$ At Rated DC Blocking Voltage @ $T_A=125^\circ C$	$I_R$			10.0 500			$\mu A$
Typical Thermal Resistance per leg (Note 3)	$R_{\theta JA}$			62.5			$^\circ C/W$
	$R_{\theta JL}$			25			
Operating and Storage Temperature Range	$T_J, T_{STG}$			-55to+150			$^\circ C$

Note:1. Mounted on glass epoxy PC board with 1.3mm<sup>2</sup> solder pad.

2. Mounted on aluminum substrate PC board with 1.3mm<sup>2</sup> solder pad.

3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.



# ABS2 THRU ABS10

Single Phase 0.8Amp Surface Mount Glass Passivated Bridge Rectifier

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

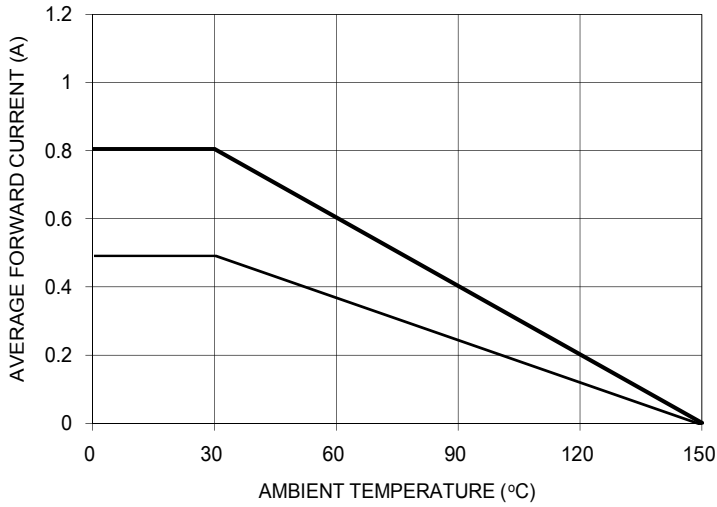


FIG. 2 TYPICAL FORWARD CHARACTERISTIC

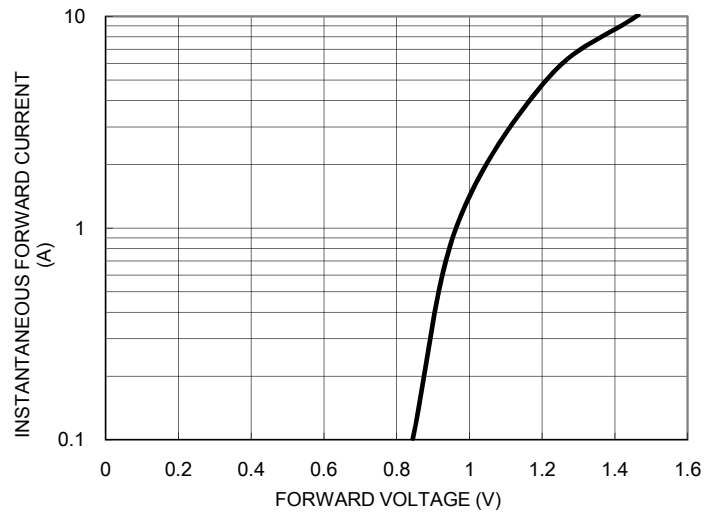


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

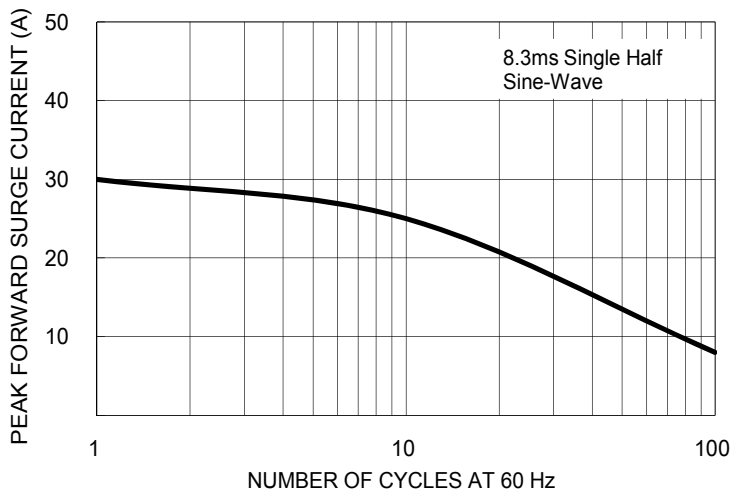


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

