


Bestückungsplan / contact layout

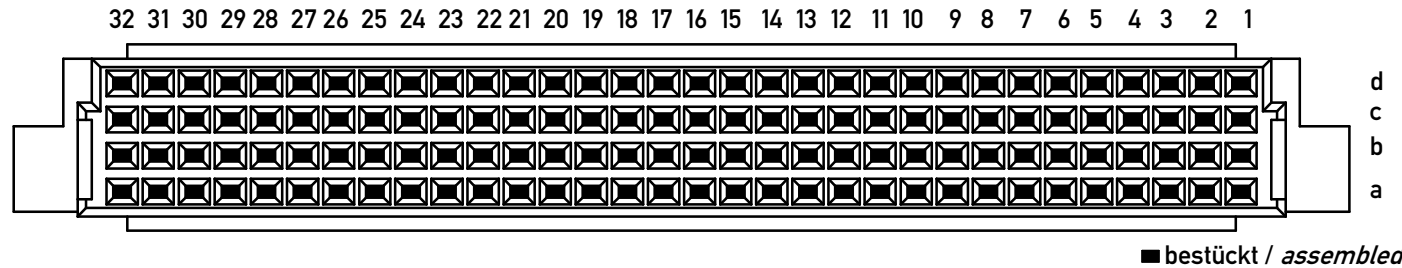


Elastische Einpresszone / compliant pressfit zone
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Maße und Angaben gemäß IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
 diameter of drilled hole see drawing 114124

1) $\phi 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches

$\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Leiterplatten-Lochbild / PCB drillhole pattern

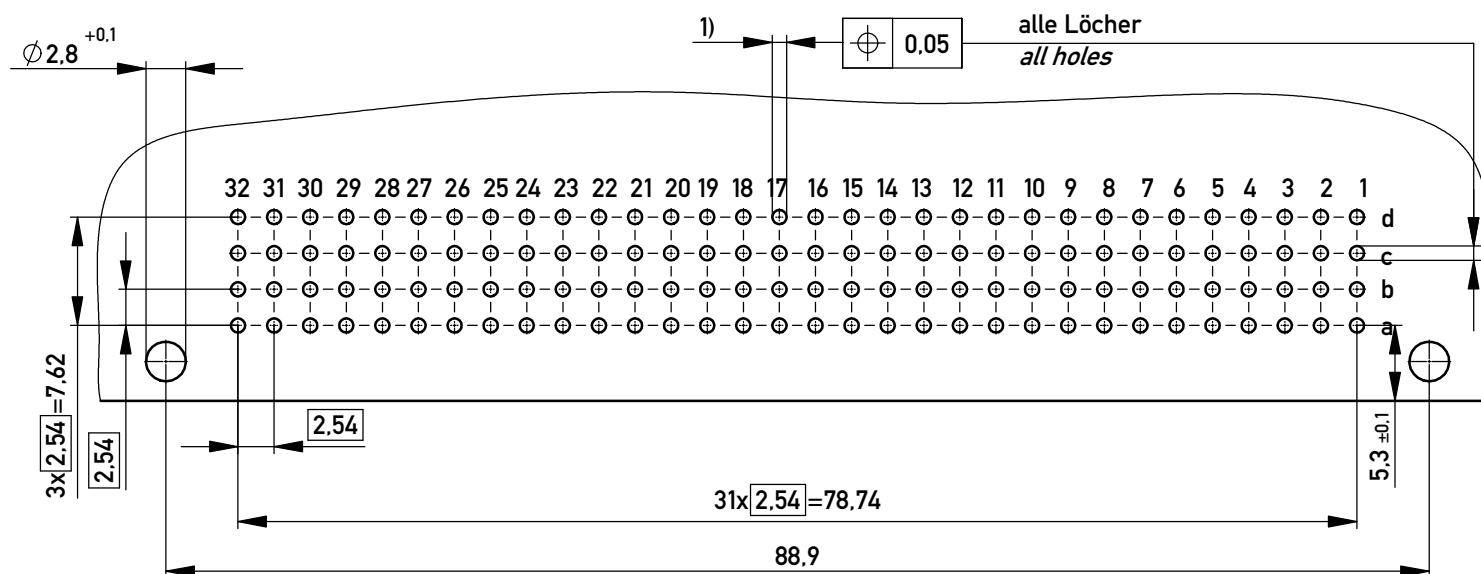

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16016 to be observed.

Information:		Tolerances	Scale 2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm	Designation Federleiste RD 128 EE Fem. connector RD 128 pressfit
c	09.12.2013	100100290001	
Index	Date	Class	STVRD
		K A3	