

960 Series Snap - Mount Rectangular Indicator Lights

Overview

The 960 Series non-relampable snap mount rectangular indicator lights are designed for mounting into a 1.281" x .395" hole with panel thickness ranges from .045" to .090".

Approvals

U.L. Listed for units with wire leads; UL Recognized for units with terminals. All units are CSA Certified.

Specifications

Housing: White nylon (standard), black optional, other colors available to special order.

Bezel: Chrome-plated.

Terminations: Wire leads: Black #18 gauge, PVC plastic insulated. UL-CSA rated at 105°C. 6" long, 1/2" stripped. Terminals: Brass, Tin-plated 1/4" or 3/16" quick connect.


Incandescent AC or DC Voltage options: 6 to 28 volts.

High Brightness Neon AC Voltage options: 125 to 250 volts.

Lens: Heat resistant, high strength polycarbonate. Fluted (Standard). Smooth face available to special order.

Lens Marking: Lenses may be stamped. Contact factory.

Mounting: Designed to snap securely into a 1.281" x .395" hole. Panel thickness ranges from .045" to .090".

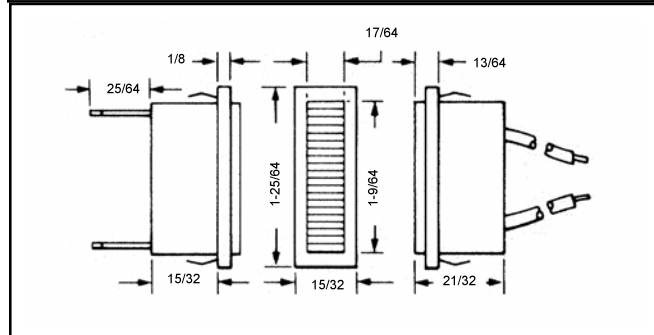

ORDERING INFORMATION: EXAMPLE: 961 6 71 T 90 W AN											
	Chrome Plated Bezel	Wire Leads	250 Volt Neon Lamp	Built-in 150K OHM	Rectangular Fluted Lens	White Housing	Amber Non-Diffusing Lens				
Series Number	Termination	Lamp				Resistor	Lens Type	Housing Color	Lens Color		
		Code	Volts	MA	Life (Hrs)						
961 Chrome Plated Bezel	6 6" Wire Leads	10	6.0	40	10,000	X None (No Resistor required with incandescent lamps)	90 ⁵ Rectangular (Fluted) Standard	W White (Standard)	Nondiffusing (Clear)		
		12	6.3	200	5,000						
		02	6.3	200	20,000						
		13	14.0	80	1,500						
		03	14.0	80	15,000						
		15	28.0	40	4,000						
	7 .187" Q.C. Terminals	NEON (High Brightness)	04	28.0	40	7,000	A 22K OHM T 150K OHM B 30K OHM E 100K OHM B 30K OHM E 100K OHM		91 Rectangular (Smooth)	B Black (Optional)	AN Amber BN Blue CN Colorless GN Green RN Red WN White (Cloudy) YN Yellow
			70 ²	125	1/3 W	10,000					
			70 ²	250	1/3 W	10,000					
			56 ³	125	1/3 W	10,000					
			56 ³	250	1/3 W	10,000					
			57 ⁴	125	1/3 W	10,000					
8 .250 Q.C. Terminals	NEON (High Brightness)	57 ⁴	125	1/3 W	10,000	E 100K OHM	91 Rectangular (Smooth)	B Black (Optional)	AT Amber BT Blue GT Green RT Red WT White YT Yellow		
		57 ⁴	250	1/3 W	10,000						
<p>² Standard Neon. Use with lens colors AN, CN, RN, WN, or YN.</p> <p>³ Green Neon. Use with lens colors CN, GN or WN.</p> <p>⁴ Blue Neon. Use with lens colors BN, CN, or WN.</p> <p>⁵ Nondiffusing lens colors.</p> <p>⁶ Not recommended for use with neon lamps.</p>											