




KERSEMI

MBR1530CT–MBR1560CT

Features

- Schottky barrier chip
- Guard ring die construction for transient protection
- Low power loss, high efficiency
- High current capability and low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection application
- Plastic material – UL Recognition flammability classification 94V-0

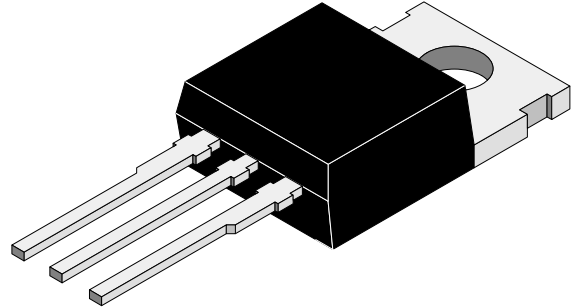

95 9630

Absolute Maximum Ratings

$T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Value	Unit
Repetitive peak reverse voltage =Working peak reverse voltage =DC Blocking voltage		MBR1530CT	V_{RRM} = V_{RWM} = V_R	30	V
		MBR1535CT		35	V
		MBR1540CT		40	V
		MBR1545CT		45	V
		MBR1550CT		50	V
		MBR1560CT		60	V
Peak forward surge current			I_{FSM}	150	A
Average forward current	$T_C=125^\circ\text{C}$		I_{FAV}	15	A
Junction and storage temperature range			$T_j=T_{stg}$	-65...+150	$^\circ\text{C}$

$T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F=7.5\text{A}, T_C=125^\circ\text{C}$	MBR1530CT	V_F			0.57	V
	$I_F=15\text{A}, T_C=25^\circ\text{C}$	–MBR1545CT	V_F			0.84	V
	$I_F=15\text{A}, T_C=125^\circ\text{C}$		V_F			0.72	V
	$I_F=7.5\text{A}, T_C=125^\circ\text{C}$	MBR1550CT	V_F			0.65	V
	$I_F=15\text{A}, T_C=25^\circ\text{C}$	–MBR1560CT	V_F			0.90	V
	$I_F=15\text{A}, T_C=125^\circ\text{C}$		V_F			0.80	V
Reverse current	$T_C=25^\circ\text{C}$	MBR1530CT	I_R			0.1	mA
	$T_C=125^\circ\text{C}$	–MBR1545CT	I_R			15	mA
	$T_C=25^\circ\text{C}$	MBR1550CT	I_R			1.0	mA
	$T_C=125^\circ\text{C}$	–MBR1560CT	I_R			50	mA
Diode capacitance	$V_R=4\text{V}, f=1\text{MHz}$		C_D		300		pF
Thermal resistance junction to case	$T_L=\text{const.}$		R_{thJC}		1.7		K/W
Voltage rate of change (Rated V_R)		MBR1530CT –MBR1540CT	dV/dt			1000	K/W
		MBR1545CT –MBR1560CT	dV/dt			10000	K/W

Characteristics ($T_j = 25^\circ\text{C}$ unless otherwise specified)

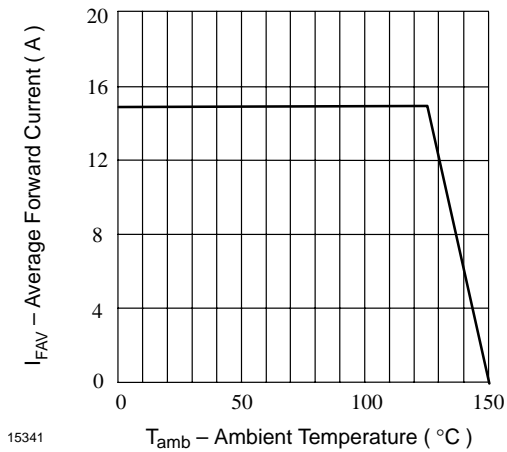


Figure 1. Max. Average Forward Current vs. Ambient Temperature


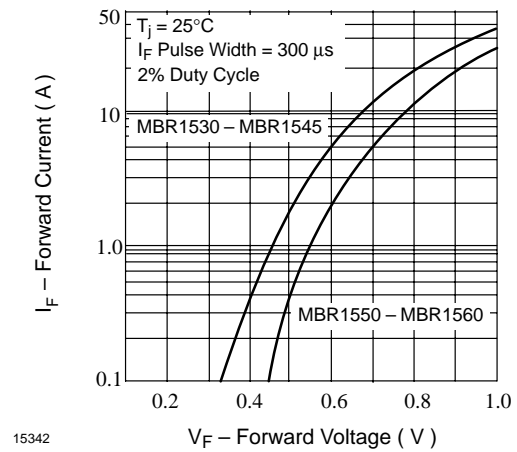


Figure 2. Typ. Forward Current vs. Forward Voltage




KERSEMI

MBR1530CT-MBR1560CT

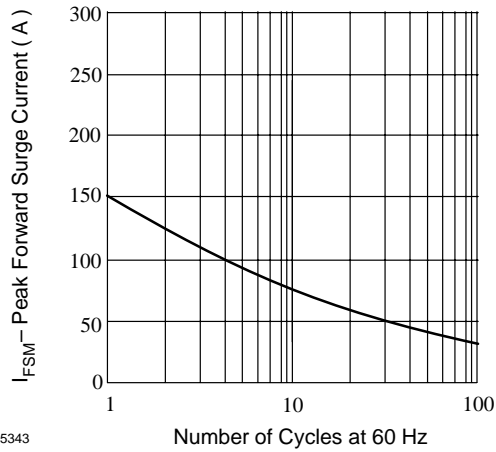


15343

Figure 3. Max. Peak Forward Surge Current vs. Number of Cycles

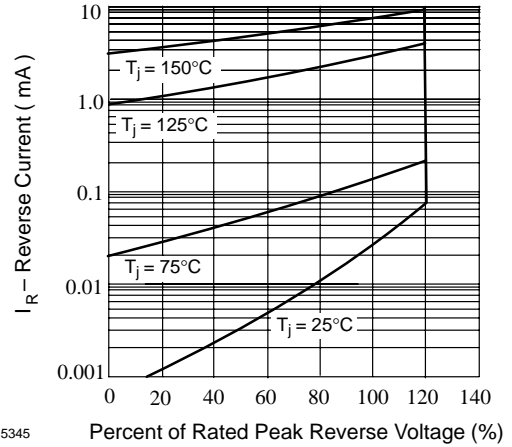


15345

Figure 5. Typ. Reverse Current vs. Percent of Rated Peak Reverse Voltage

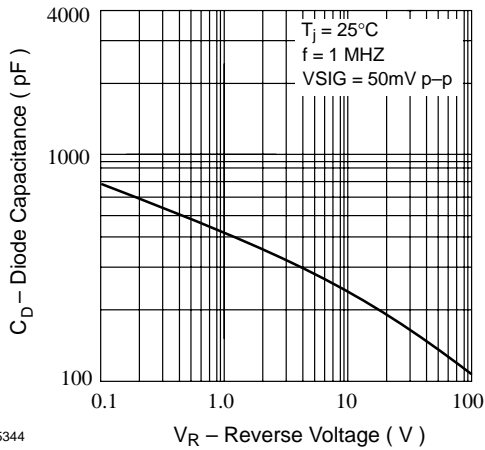


15344

Figure 4. Typ. Diode Capacitance vs. Reverse Voltage

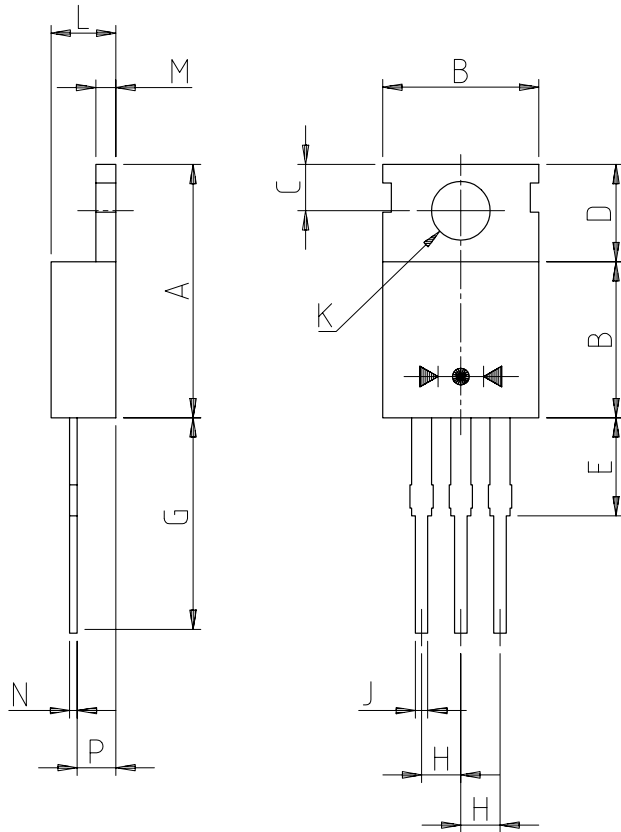

T0-220AB		
Dim	Min	Max
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	-	6.25
G	12.70	14.73
H	2.29	2.79
J	0.51	1.14
K	∅3.53	∅4.09
L	3.56	4.83
M	1.14	1.40
N	0.30	0.64
P	2.03	2.92
All Dimensions in mm		



technical drawings
according to DIN
specifications

14468

Case: molded plastic
Polarity: as marked on body
Approx. weight: 2.24 grams
Mounting position: any
Marking: type number