



# GF20AH THRU GF20MH


## SURFACE MOUNT GLASS PASSIVATED JUNCTION RECTIFIER

*Reverse Voltage - 50 to 1000 Volts*

*Forward Current - 2.0 Amperes*

**PATENTED**

**SMB/DO-214AA**

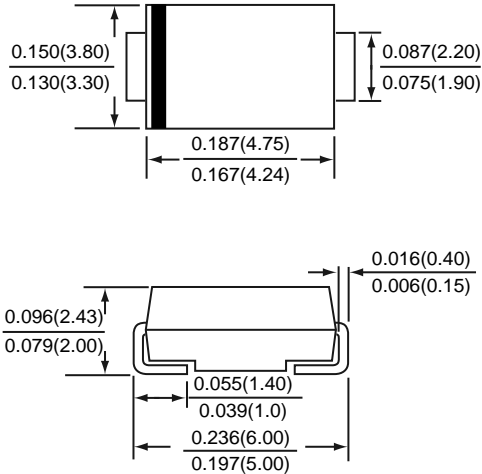

\*Dimensions in inches and (millimeters)

**SUPEREX II**<sup>TM</sup>



### FEATURES

- \* Halogen-free type
- \* GPRC (Glass Passivated Rectifier Chip) inside
- \* Glass passivated cavity-free junction
- \* Ideal for surface mount automotive applications
- \* Built-in strain relief
- \* Easy pick and place
- \* High temperature soldering guaranteed: 260°C/10 seconds, at terminals
- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0

### MECHANICAL DATA

**Case :** JEDEC DO-214AA molded plastic over passivated chip

**Terminals :** Tin plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Color band denotes cathode end

**Weight :** 0.003 ounces , 0.093 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

| Ratings at 25 °C ambient temperature unless otherwise specified.                                 | SYMBOLS          | GF20          |     |     |     |     |     |      | UNITS  |
|--|------------------|---------------|-----|-----|-----|-----|-----|------|--------|
|  |                  | AH            | BH  | DH  | GH  | JH  | KH  | MH   |        |
| Maximum repetitive peak reverse voltage  | VRRM             | 50            | 100 | 200 | 400 | 600 | 800 | 1000 | Volts  |
| Maximum RMS voltage  | VRMS             | 35            | 70  | 140 | 280 | 420 | 560 | 700  | Volts  |
| Maximum DC blocking voltage  | VDC              | 50            | 100 | 200 | 400 | 600 | 800 | 1000 | Volts  |
| Maximum average forward rectified current (SEE FIG.1)  | I (AV)           | 2.0           |     |     |     |     |     |      | Amps   |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | IFSM             | 65            |     |     |     |     |     |      | Amps   |
| Maximum instantaneous forward voltage at 2.0 A   | VF               | 1.0           |     |     |     |     |     |      | Volts  |
| Maximum DC reverse current at rated DC blocking voltage  | IR               | 5<br>30<br>80 |     |     |     |     |     |      | uA     |
| Typical junction capacitance (NOTE 1)  | CJ               | 25            |     |     |     |     |     |      | pF     |
| Typical thermal resistance (NOTE 2)  | R θ JA<br>R θ JL | 53<br>16      |     |     |     |     |     |      | °C / W |
| Operating junction and storage temperature range   | TJ,TSTG          | -65 to +175   |     |     |     |     |     |      | °C     |

NOTES : (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(2) Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES GF20AH THRU GF20MH

FIG.1 - FORWARD CURRENT DERATING CURVE

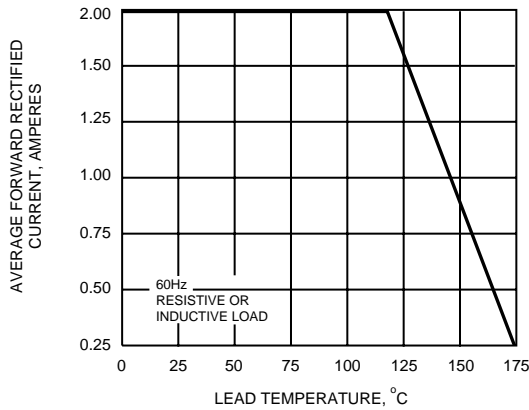


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

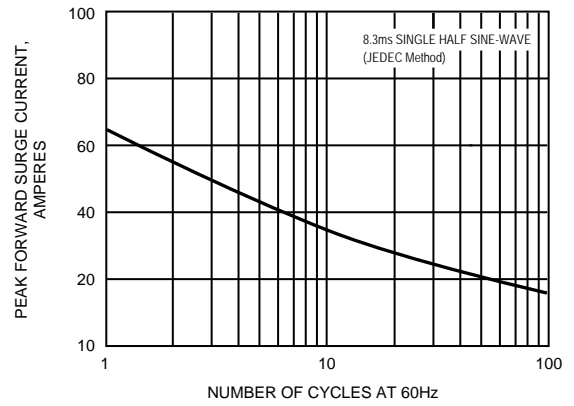


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

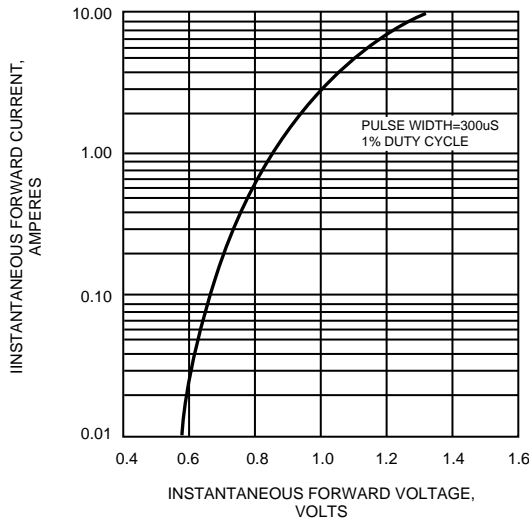


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

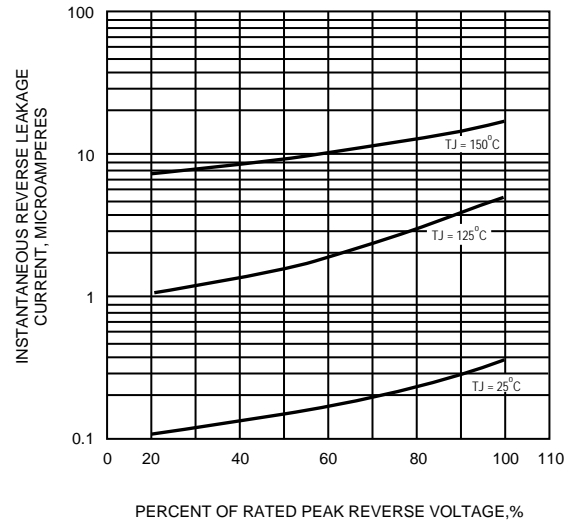


FIG.5 - TYPICAL JUNCTION CAPACITANCE

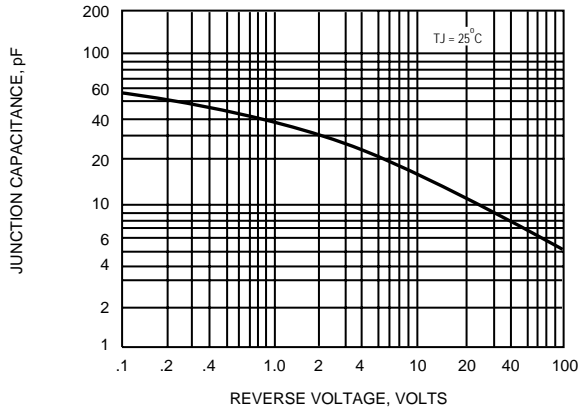


FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

