

Press Fit Stud Mount SCR ½", 25 Amps

Features

- Improved glass passivation for high reliability
- Exceptional stability at high temperatures
- Metric thread type available
- Low thermal resistance



TO-48/F

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Part Numbers	Units
Maximum repetitive peak reverse voltage, V_{RRM}	50	NPSS250	V
	100	NPSS251	
	200	NPSS252	
	400	NPSS254	
	600	NPSS256	
Maximum average forward output current	$I_{T(AV)}$	25	A
Peak forward surge current, single half sine-wave	I_{TSM}	250	A
Peak gate trigger current	I_{GTM}	2	A
Peak gate power dissipation @ $I_{GT} \leq I_{GTM}$	P_{GM}	20	W
Average gate power dissipation	$P_{G(AV)}$	0.5	W
Peak off-state current	$I_{DRM} & I_{RRM}$	1.0	mA
Maximum instantaneous forward voltage drop @ 100 A	V_{TM}	1.5	V
DC holding current	I_H	50	mA
Critical rate-of-rise of off-state voltage	dv/dt	200	V/ μ sec
Gate trigger current	I_{GT}	25	mA
Gate trigger voltage	V_{GT}	2.0	V
Turn-on time	T_{gt}	2.5	μ sec

Thermal and Mechanical Specifications ($T_A = 25^\circ\text{C}$, unless otherwise noted)

Parameters	Symbol	Values	Units
Maximum operating junction temperature range	T_J	- 40 to +110	$^\circ\text{C}$
Maximum storage temperature range	T_{Stg}	- 40 to +150	$^\circ\text{C}$
Maximum thermal resistance, junction to case	$R_{\theta(J-C)}$	1.8	$^\circ\text{C}/\text{W}$
Approximate weight	W	20	g

Package Outline

(All dimensions in mm)

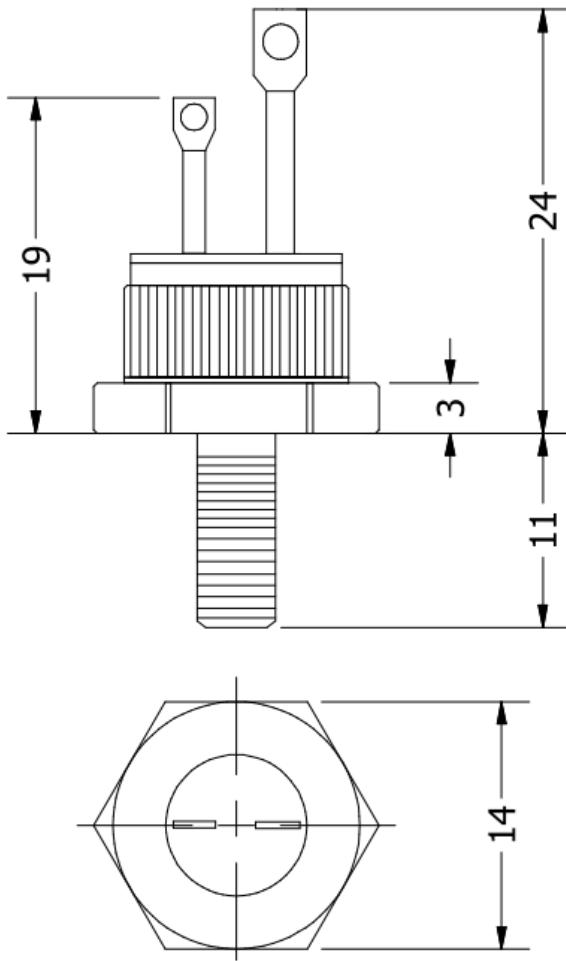

Ordering Table

NPSS	25	0,1,2,4,6
1	2	3

1 – Press Fit Stud Mount SCR

2 – Current, $I_{F(AV)}$

3 – Voltage, V_{RRM} (See table)