


## 3SBC5134A1 Product Details

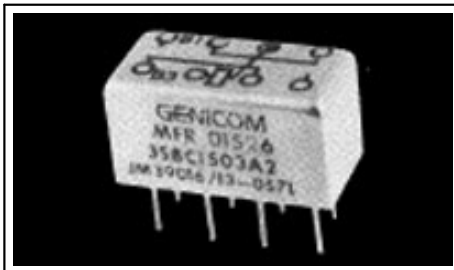

**3SBC5134A1**  
(9-1617347-4)

TE Internal Number: 9-1617347-4

[Active](#)

### Military/Aerospace High Performance Relays

[Not EU RoHS or ELV Compliant](#)

#### Product Highlights:

- 3SBC 1/5-Size Relay Series
- Input Voltage = 5 VDC
- Contact Arrangement = 2 Form C, DPDT, 2 C/O
- Contact Current Rating = 2 Amps.
- Non Polarized, Monostable Coil Magnetic System

[View all Features](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

### Documentation & Additional Information

#### Product Drawings:

- None Available

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- Termination Type = PC Pins

#### Electrical Characteristics:

- Input Voltage (VDC) = 5
- Contact Current Rating (Amps.) = 2
- Coil Polarity Protection Diode = Without
- Transistor Driver = Without
- Coil Resistance (?) = 44
- MOSFET Driver = Without
- Coil Power Measurement = Milliwatts
- Coil Power, Nominal (mW) = 568
- Actuating System = DC
- Shock = 100G's, 11ms
- Vibration = 30G's, 10 to 3000Hz

#### Body Related Features:

- [Series](#) = 3SBC 1/5-Size Relay

#### Contact Related Features:

- Mounting Options = Chassis Mount
- Enclosure = Hermetically Sealed

#### Configuration Related Features:

- [Contact Arrangement](#) = 2 Form C, DPDT, 2 C/O
- Coil Magnetic System = Non Polarized, Monostable
- Coil Suppression Diode = Without

#### Industry Standards:

- Government/Industry Qualification = No
- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Not suitable for lead free processing

#### Conditions for Usage:

- Temperature Range (?C) = -65 - +125

#### Other:

- Brand = CII

### Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

### Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat with Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)