


RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS, 1	PDS, 2	PDS, 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4 (VA) MAX. @20 VAC or DC MAX.
5. FIXED TERM./MOVING CONTACT:  
Copper ALLOY W/GOLD PLATE over Nickel PLATE.  
AT FULL LOAD.
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES
7. INSULATION RESISTANCE: 1000M OHM TYPICAL
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP: -30°C to +85°C

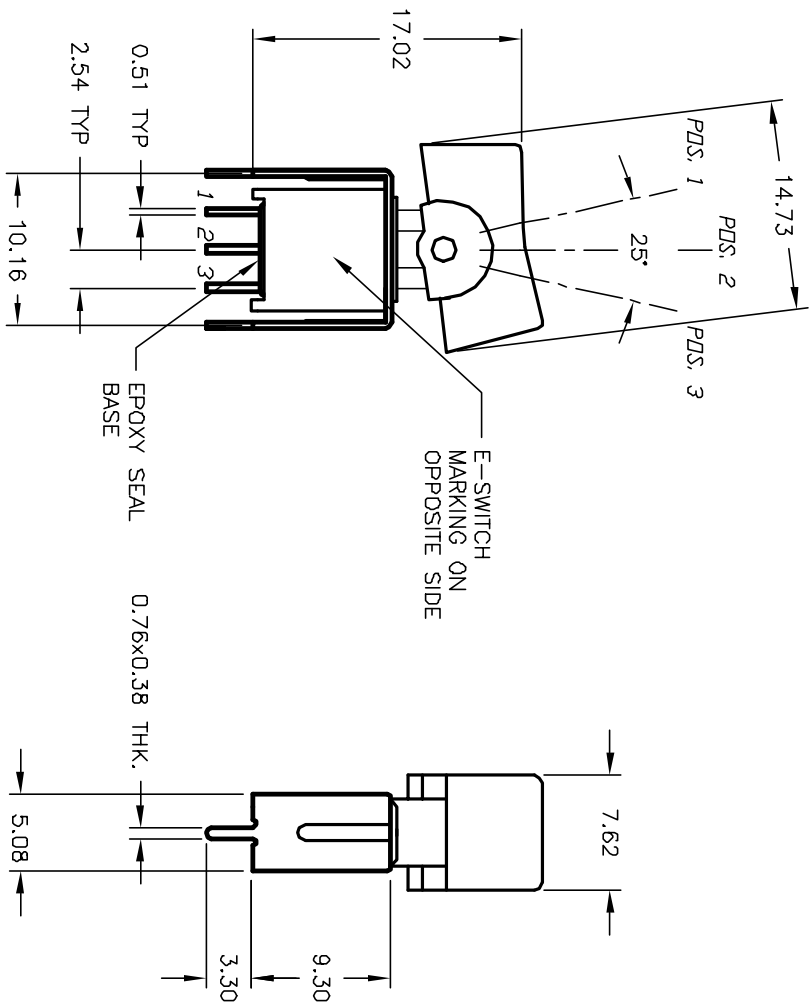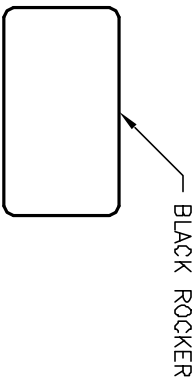

**E-SWITCH®**

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
A	12029	RELEASED FOR PRODUCTION	4/2/02	CB

TITLE	SCALE	DATE	DR	DWG	REV
400A WMSP-1 R1 (BLK) VS2 RE (GOLD CONTACT)	2:1	4/2/02	CB	T402000	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED