

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-		E2	CHANGE LOGO&ADD LINE IDENTIFICATION ECO-12-001771	20Aug2012	YS.H	BH.Y






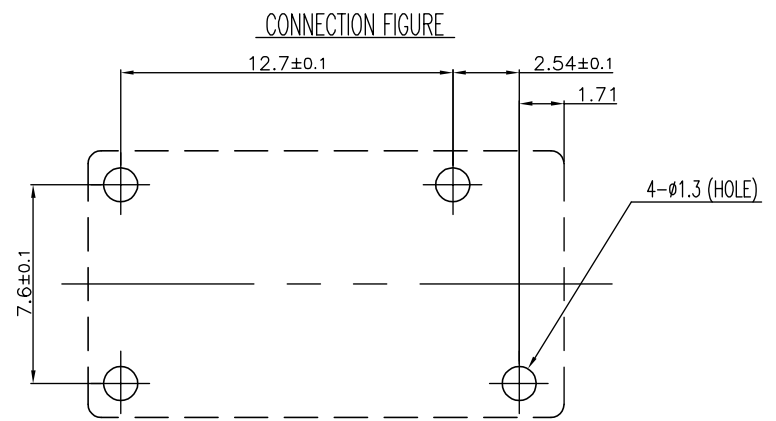


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING (BOTTOM VIEW)

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

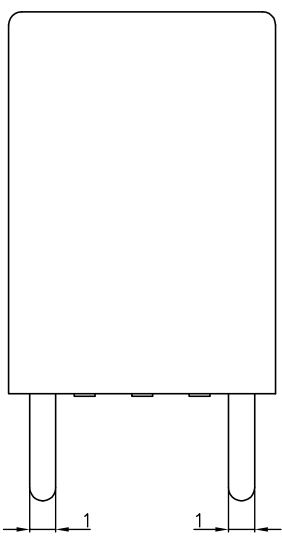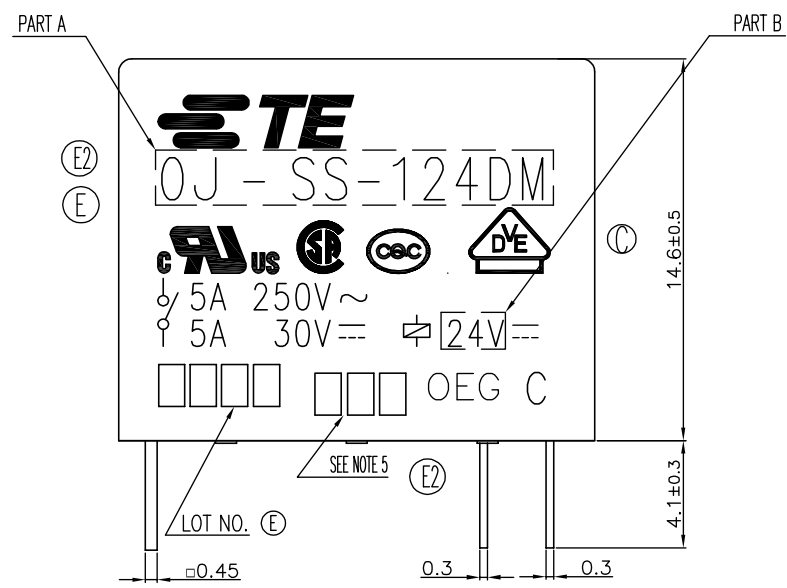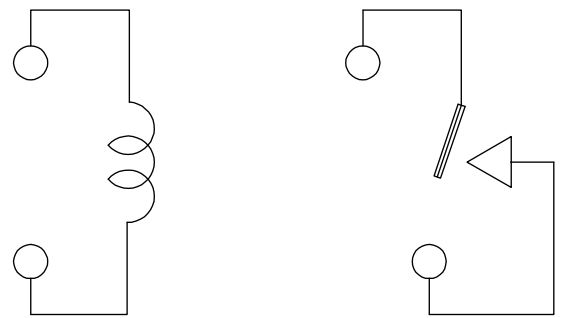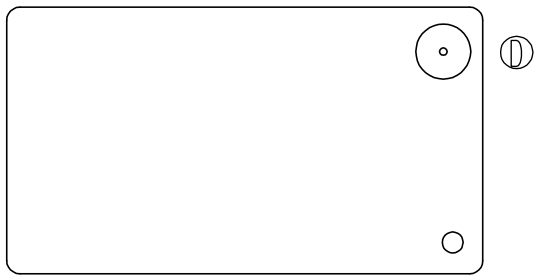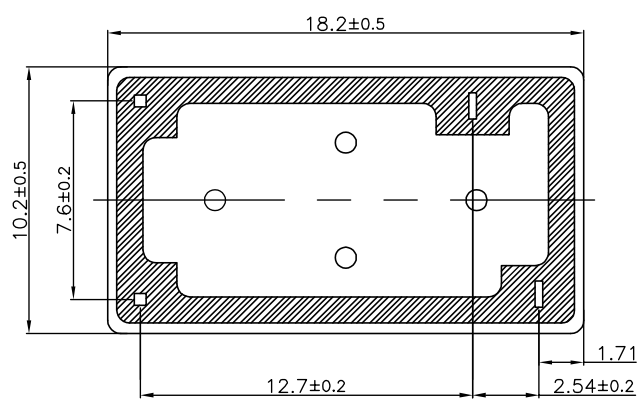

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.Sasaki	TE Connectivity		
DIMENSIONS: mm		CHK	Y.Oikakwa			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	A.Nagai	NAME		
0 PLC ± -		PRODUCT SPEC	-	OJ-SS-DM CUSTOMER DRAWING		
1 PLC ± -		APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO
2 PLC ± -		WEIGHT	-	A3	00779	G= 1461076
3 PLC ± -		MATERIAL		RESTRICTED TO	-	
4 PLC ± -		FINISH		SCALE	SHEET	REV
ANGLES ± -		-		5:1	1 of 2	E2
CUSTOMER DRAWING						

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HB	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

(E2) (C)	1461076-3	OJ-SS-118DM	107-79010	18VDC	OJ-SS-118DM	h
(E2)	4-1419144-6	OJ-SS-148DM	107-79010	48VDC	OJ-SS-148DM	g
	2-1419129-9	OJ-SS-124DM	107-79010	24VDC	OJ-SS-124DM	f
	1-1419129-8	OJ-SS-112DM	107-79010	12VDC	OJ-SS-112DM	e
	1-1419129-5	OJ-SS-109DM	107-79010	9VDC	OJ-SS-109DM	d
(E2)	1461076-2	OJ-SS-106DM	107-79010	6VDC	OJ-SS-106DM	c
	3-1419144-7	OJ-SS-105DM	107-79010	5VDC	OJ-SS-105DM	b
(E2)	1461076-1	OJ-SS-103DM	107-79010	3VDC	OJ-SS-103DM	a
	PART NO	TYPE NAME	PACKAGE SPEC	PART B	PART A	TYPE


RELAY TYPE

(E) (C) NOTE:  
 1. LOT NO. SYSTEM AS FOLLOWS:  
 □□ □□  
 WEEK  
 YEAR

(E2) 6. ADD LOT NO. SYSTEM AS FOLLOWING;  
 I I A I, DIGITS FOR DAY OF THE WEEK  
 I II III 1...MONDAY IN THIS WEEK;  
 2...TUESDAY IN THIS WEEK;  
 .....  
 7...SUNDAY IN THIS WEEK  
 II, DIGITS FOR SHIFT OF THE DAY  
 1...DAY SHIFT IN THIS DAY;  
 2...NIGHT SHIFT IN THIS DAY;  
 III, ONE CHARACTER DISTINGUISH THE  
 LINE IDENTITY, SUCH AS: A,B.....Z

(E2) 2. TERMINAL DIMENSION IS BEFORE SOLDER DIP;  
 (E2) 3. FOR THE TIN-PLATING OF THE PINS:  
 +0.1mm FOR WIDTH, THICKNESS AND DIAMETER.  
 +0.5mm FOR LENGTH.  
 (E2) 4. MARKING FROM INK TO LASER.

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		SUEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	PBP	NO.TERMINAL	5
	SOLDER DIP	PBS	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	H.Sasaki	-
DIMENSIONS: mm		CHK	Y.Oikakwa	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	A.Nagai	-
	0 PLC	± -	NAME	
	1 PLC	± -	OJ-SS-DM CUSTOMER DRAWING	
	2 PLC	± -	SIZE	A3
	3 PLC	± -	CAGE CODE	00779
4 PLC	± -	DRAWING NO	G= 1461076	RESTRICTED TO
4 PLC ANGLES	± -	APPLIC. SPEC	-	-
MATERIAL	FINISH	WEIGHT	-	-
CUSTOMER DRAWING		SCALE	5:1	SHEET 2 of 2
		REV	E2	