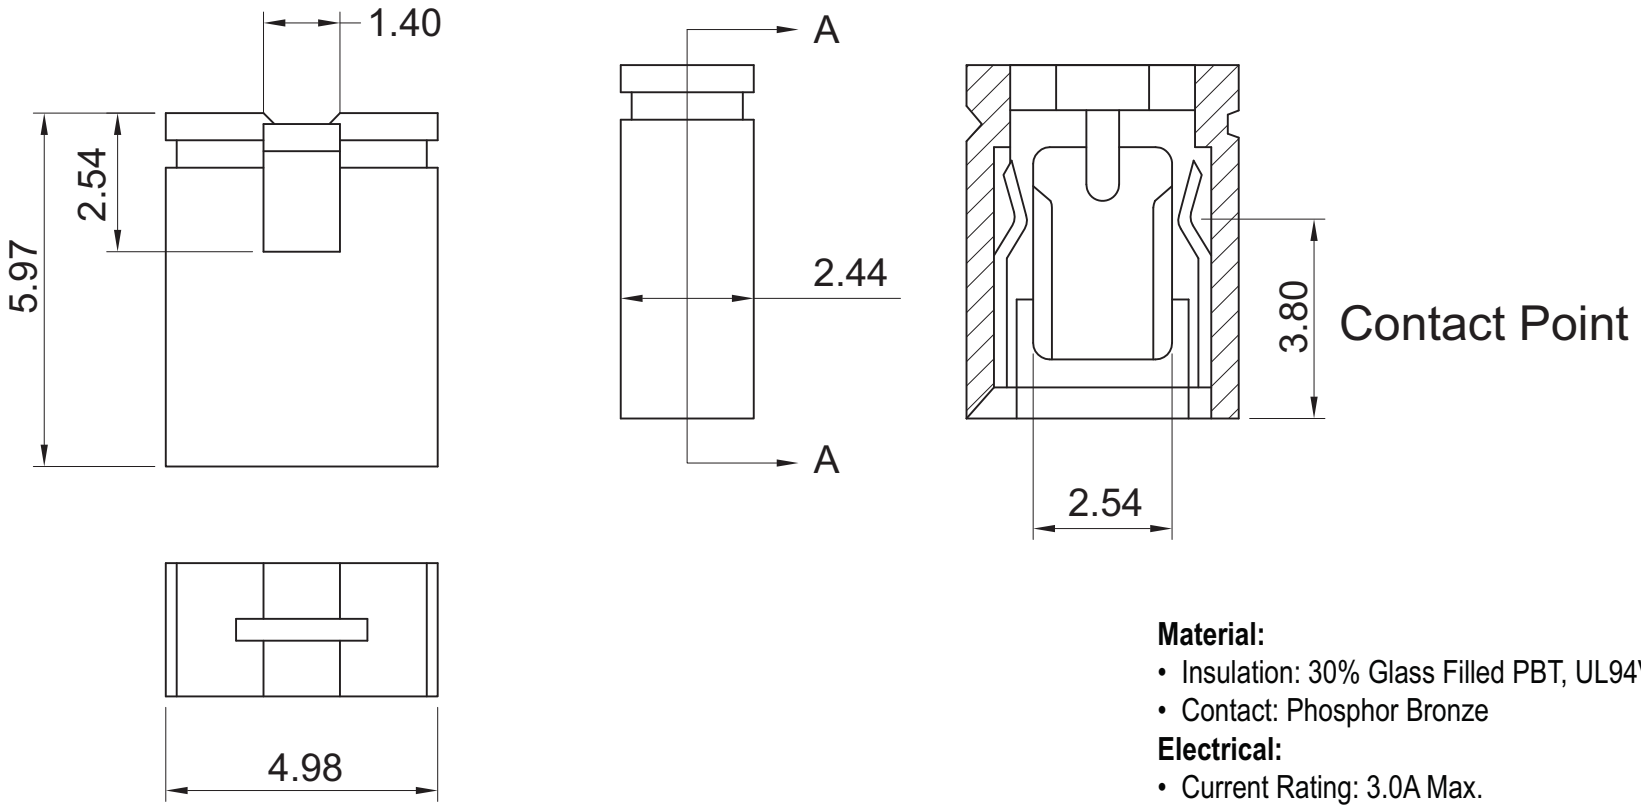


**Material:**
- Insulation: 30% Glass Filled PBT, UL94V-0
- Contact: Phosphor Bronze

**Electrical:**
- Current Rating: 3.0A Max.
- Contact Resistance: 30MΩ Max.
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Voltage: 1,000V R.M.S. @1min.
- Operating and Storage Temperature: -40°C~+105°C

Unit: MM±0.25MM

RoHS Complaint

| | |
|---|---|
| Scale | 1:1 |
| TOLERANCE | |
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| Angle | ±3° |

| Modification | Date | Name |
|---|---|---|

| | | Name |
|---|---|---|
| Drawn | 11.11.11 | Chappell |
| Approved | | |

ASSMANN WSW components

Item No.
**AKSPT-G-BLK-50-R**

Title
Mini Jumper - w/Test Slot, 2.54 pitch, 50µ' contact plating

Drawing No.

**rev00**

Replace

Sheet