www.DataSheet4U.com

RFE INTERNATIONAL

BRIDGE RECTIFIERS
25 to 40 Amps

SINGLE PHASE PLASTIC BRIDGE RECTIFIERS (INCLUDING GLASS PASSIVATED)

RF Part Number	Cross Reference	Max Avg Rectified Current	Peak Inverse Voltage	Peak Fwd Surge Current @ 8.3ms Superimposed	Max Forward Voltage @ TA = 25°C @ Rated IO	Max Reverse Current @ 25°C @ Rated PIV	Package	Outline (Typical size in inches)
		I_O(A)	PIV(V)	I_{FSM}(A)	V_{FM}(V)	I_R(A)		
GBPC25-005		25 A	50	300	1.1@12.5A	10	1000/Box	
GBPC25-01		25 A	100	300	1.1@12.5A	10		
GBPC25-02		25 A	200	300	1.1@12.5A	10		
GBPC25-04		25 A	400	300	1.1@12.5A	10		
GBPC25-06		25 A	600	300	1.1@12.5A	10		
GBPC25-08		25 A	800	300	1.1@12.5A	10		
GBPC25-10		25 A	1000	300	1.1@12.5A	10		
GBPC25-005W		25 A	50	300	1.1@12.5A	10	1000/Box	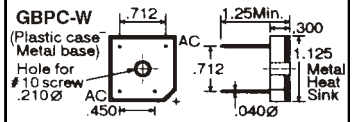
GBPC25-01W		25 A	100	300	1.1@12.5A	10		
GBPC25-02W		25 A	200	300	1.1@12.5A	10		
GBPC25-04W		25 A	400	300	1.1@12.5A	10		
GBPC25-06W		25 A	600	300	1.1@12.5A	10		
GBPC25-08W		25 A	800	300	1.1@12.5A	10		
GBPC25-10W		25 A	1000	300	1.1@12.5A	10		
GBPC25-005V		25 A	50	300	1.1@12.5A	10	1000/Box	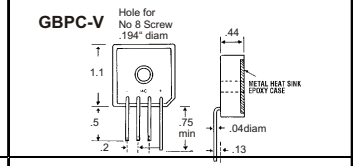
GBPC25-01V		25 A	100	300	1.1@12.5A	10		
GBPC25-02V		25 A	200	300	1.1@12.5A	10		
GBPC25-04V		25 A	400	300	1.1@12.5A	10		
GBPC25-06V		25 A	600	300	1.1@12.5A	10		
GBPC25-08V		25 A	800	300	1.1@12.5A	10		
GBPC25-10V		25 A	1000	300	1.1@12.5A	10		
SB3505	KBPC3505	35 A	50	300	1.1@17.5A	10	1000/Box	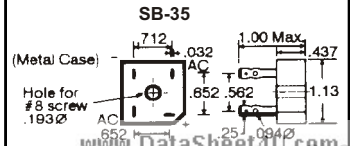
SB351	KBPC351	35 A	100	300	1.1@17.5A	10		
SB352	KBPC352	35 A	200	300	1.1@17.5A	10		
SB354	KBPC354	35 A	400	300	1.1@17.5A	10		
SB356	KBPC356	35 A	600	300	1.1@17.5A	10		
SB358	KBPC358	35 A	800	300	1.1@17.5A	10		
SB3510	KBPC3510	35 A	1000	300	1.1@17.5A	10		
SB3505W	KBPC3505	35 A	50	300	1.1@17.5A	10	1000/Box	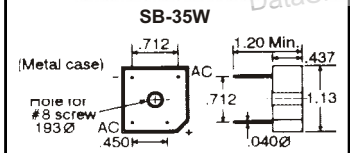
SB351W	KBPC351	35 A	100	300	1.1@17.5A	10		
SB352W	KBPC352	35 A	200	300	1.1@17.5A	10		
SB354W	KBPC354	35 A	400	300	1.1@17.5A	10		
SB356W	KBPC356	35 A	600	300	1.1@17.5A	10		
SB358W	KBPC358	35 A	800	300	1.1@17.5A	10		
SB3510W	KBPC3510	35 A	1000	300	1.1@17.5A	10		

DataSheet4U.com