

Dual Schottky Barrier Rectifiers

FEATURES

- Reverse voltage 35 to 45 V
- Forward current 3.0 A
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Guard ring for over voltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications


MBR3035(45)CT
MBRF3035(45)CT
MBRB3035(45)CT
Series

MECHANICAL DATA

- Case: JEDEC TO-220AB, ITO-220AB, TO-263AB molded plastic body
- Terminals: Plated leads, solder-able per MIL-STD-750, Method 2026
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case (TO-220AB, ITO-220AB) at terminals (TO-236AB)
- Polarity: As marked Mounting Position: Any
- Mounting Torque: 10 in-lbs maximum
- Weight: 0.08 ounce, 2.24 grams

PACKAGE DIMENSIONS

TO-220AB

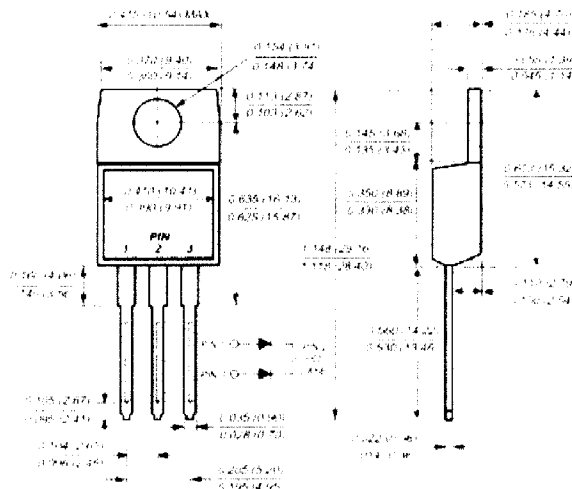

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Unless otherwise specified, these specifications apply over the operating ambient temperature of 25°C.


Parameter	Symbol	MBR3035CT	MBR3045CT	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	35	45	Volts
Working peak reverse voltage	V_{PRM}	35	45	Volts
Maximum DC blocking voltage	V_{DC}	35	45	Volts
Maximum average forward rectified current (See Fig. 1)	I_{FAV}	Total device Per leg		Amps
		30	15	
Peak repetitive forward current (rated V_R , sq. wave, 20KHz) at $T_c = 105^\circ\text{C}$	I_{RRM}	30		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I_{FSM}	200		Amps
Peak repetitive reverse surge current per leg at $t_b = 2.0\mu\text{s}$, 1KHz	I_{RRM}	2.0		Amps
Voltage rate of change (rated V_p)	dv/dt	10,000		V/ μs
Maximum instantaneous forward voltage per leg (Note 4)	V_f			Volt
at $I_f = 15\text{A}$, $T_c = 125^\circ\text{C}$		0.60		
at $I_f = 30\text{A}$, $T_c = 25^\circ\text{C}$		0.76		
at $I_f = 30\text{A}$, $T_c = 125^\circ\text{C}$		0.72		
Maximum instantaneous reverse current at rated DC blocking voltage per leg (Note 4)	I_R			mA
$T_c = 25^\circ\text{C}$		1.0		
$T_c = 125^\circ\text{C}$		60		
Typical thermal resistance per leg	$R_{\theta JC}$	MBR 1.5 / MBRF 4.5 / MBRB 1.5		$^\circ\text{C/W}$
RMS Isolation voltage (MBRF type only) from terminals to heatsink with $t = 1.0$ second, $RH \pm 30\%$	V_{ISOL}	4500 (Note 1) 3500 (Note 2) 1500 (Note 3)		Volts
Operating junction temperature range	T_c	-55 to +150		$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150		$^\circ\text{C}$

Notes:


1. Clip mounting (on case), where lead does not overlap heat sink with 0.110" offset
2. Clip mounting (on case), where leads do overlap heat sink Screw mounting with 4-40 screw, where washer diameter is < 4.9 mm (0.19")
3. Pulse test: 300us pulse width, 1% duty cycle

**MBR3035(45)CT
MBRF3035(45)CT
MBRB3035(45)CT
Series**

ITO-220AB

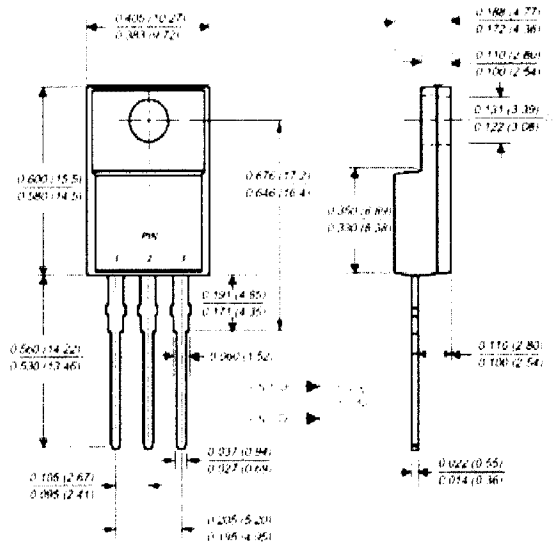

Mounting Pad Layout TO-263AB

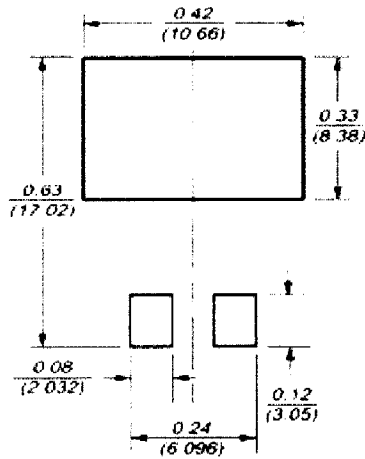

TO-263AB(D2PAK)

