

Silicon NPN Darlingtion Power Transistor

PMD10K80

DESCRIPTION

- High DC current gain
- Collector-Emitter Sustaining Voltage-
 $V_{CEO(SUS)} = 80V(\text{Min})$
- Complement to type PMD11K80

APPLICATIONS




- Designed for general purpose amplifier and low frequency switching applications

ABSOLUTE MAXIMUM RATINGS($T_C=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	80	V
V_{CEO}	Collector-Emitter Voltage	80	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current -Continuous	12	A
I_{CP}	Collector Current-Peak	20	A
I_B	Base Current	0.2	A
P_C	Collector Power Dissipation@ $T_C=25^\circ\text{C}$	150	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	ThermalResistance, Junction to Case	1.17	$^\circ\text{C/W}$

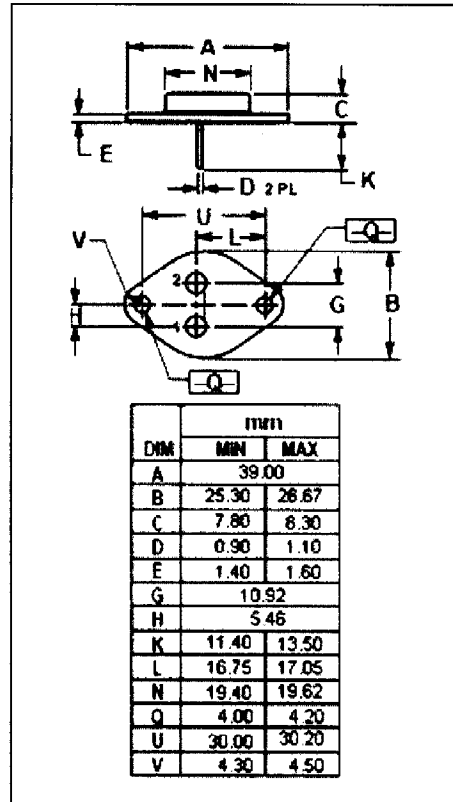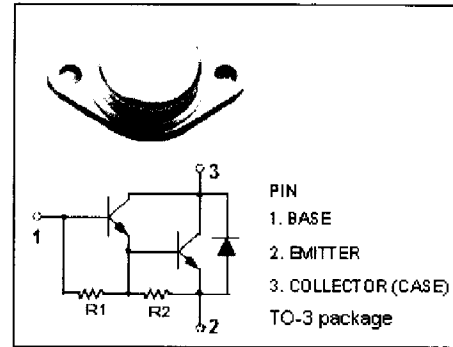

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon NPN Darlingtion Power Transistor

PMD10K80

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = 100\text{mA}$; $I_B = 0$	80		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 6\text{A}$; $I_B = 24\text{mA}$		2.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 6\text{A}$; $I_B = 24\text{mA}$		2.8	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = 6\text{A}$; $V_{CE} = 3\text{V}$		2.8	V
I_{CER}	Collector Cutoff current	$V_{CE} = 80\text{V}$; $R_{BE} = 1\text{K}\Omega$ $V_{CE} = 80\text{V}$; $R_{BE} = 1\text{K}\Omega$, $T_C = 150^\circ\text{C}$		1.0 5.0	mA
I_{EBO}	Emitter Cut-off current	$V_{EB} = 5\text{V}$; $I_C = 0$		2.0	mA
h_{FE}	DC Current Gain	$I_C = 6\text{A}$; $V_{CE} = 3\text{V}$	1000	20000	
f_T	Current-Gain—Bandwidth Product	$I_C = 5\text{A}$; $V_{CE} = 3\text{V}$, $f = 1\text{kHz}$	4		MHz
C_{OB}	Output Capacitance	$I_E = 0$; $V_{CB} = 10\text{V}$; $f_{test} = 1.0\text{MHz}$		300	pF