FAIRCHILD SEMICONDUCTOR®

July 2013

FDMS3660AS

PowerTrench® Power Stage

Asymmetric Dual N-Channel MOSFET

Features

Q1: N-Channel

- Max $r_{DS(on)}$ = 8 mΩ at V_{GS} = 10 V, I_D = 13 A
- Max $r_{DS(on)}$ = 11 mΩ at V_{GS} = 4.5 V, I_D = 11 A

Q2: N-Channel

- Max $r_{DS(on)}$ = 1.8 mΩ at V_{GS} = 10 V, I_D = 30 A
- Max $r_{DS(on)}$ = 2.2 mΩ at V_{GS} = 4.5 V, I_D = 27 A
- Low inductance packaging shortens rise/fall times, resulting in lower switching losses
- MOSFET integration enables optimum layout for lower circuit inductance and reduced switch node ringing
- RoHS Compliant

General Description

This device includes two specialized N-Channel MOSFETs in a dual PQFN package. The switch node has been internally connected to enable easy placement and routing of synchronous buck converters. The control MOSFET (Q1) and synchronous SyncFET™ (Q2) have been designed to provide optimal power efficiency.

Applications

- Computing
- Communications
- General Purpose Point of Load
- Notebook VCORE



Top



Bottom

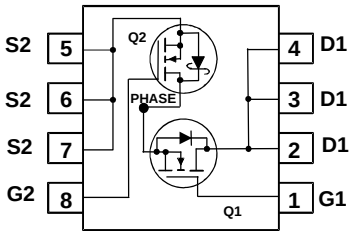

MOSFET Maximum Ratings T_A = 25 °C unless otherwise noted

Symbol	Parameter		Q1	Q2	Units
V_{DS}	Drain to Source Voltage		30	30	V
V_{GS}	Gate to Source Voltage	(Note 3)	±20	±12	V
I_D	Drain Current -Continuous	T_C = 25 °C	56	130	A
	-Continuous	T_A = 25 °C	13[1a]	30[1b]	
	-Pulsed	(Note 4)	70	140	
E_{AS}	Single Pulse Avalanche Energy		73[5]	150[6]	mJ
P_D	Power Dissipation for Single Operation	T_A = 25 °C	2.2[1a]	2.5[1b]	W
	Power Dissipation for Single Operation	T_A = 25 °C	1.0[1c]	1.0[1d]	
T_J, T_{STG}	Operating and Storage Junction Temperature Range		-55 to +150		°C

Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	57[1a]	50[1b]	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	125[1c]	120[1d]	
$R_{\theta JC}$	Thermal Resistance, Junction to Case	3.5	2.2	

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
27CF 32CD	FDMS3660AS	Power 56	13 ”	12 mm	3000 units

©2013 Fairchild Semiconductor Corporation

Electrical Characteristics T_J = 25 °C unless otherwise noted

Symbol	Parameter	Test Conditions	Type	Min	Typ	Max	Units
Off Characteristics							
BV_{DSS}	Drain to Source Breakdown Voltage	I_D = 250 μA, V_{GS} = 0 V I_D = 1 mA, V_{GS} = 0 V	Q1 Q2	30 30			V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = 250 μA, referenced to 25 °C I_D = 10 mA, referenced to 25 °C	Q1 Q2		16 29		mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 24 V, V_{GS} = 0 V	Q1 Q2			1 500	μA μA
I_{GSS}	Gate to Source Leakage Current	V_{GS} = 20 V, V_{DS}= 0 V V_{GS} = 12 V, V_{DS}= 0 V	Q1 Q2			100 100	nA nA
On Characteristics							
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 250 μA V_{GS} = V_{DS}, I_D = 1 mA	Q1 Q2	1.1 1.2	2.0 1.5	2.7 2.5	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	I_D = 250 μA, referenced to 25 °C I_D = 10 mA, referenced to 25 °C	Q1 Q2		-6 -3		mV/°C
$r_{DS(on)}$	Drain to Source On Resistance	V_{GS} = 10 V, I_D = 13 A V_{GS} = 4.5 V, I_D = 11 A V_{GS} = 10 V, I_D = 13 A , T_J = 125 °C	Q1		5.9 8.5 7.9	8 11 11	mΩ
		V_{GS} = 10 V, I_D = 30 A V_{GS} = 4.5 V, I_D = 27 A V_{GS} = 10 V, I_D = 30 A , T_J = 125 °C	Q2		1.2 1.5 1.8	1.8 2.2 2.7	
g_{FS}	Forward Transconductance	V_{DS} = 5 V, I_D = 13 A V_{DS} = 5 V, I_D = 30 A	Q1 Q2		173 240		S
Dynamic Characteristics							
C_{iss}	Input Capacitance	Q1: V_{DS} = 15 V, V_{GS} = 0 V, f = 1 MHZ	Q1 Q2		1485 4150	2230 6225	pF
C_{oss}	Output Capacitance	Q2: V_{DS} = 15 V, V_{GS} = 0 V, f = 1 MHZ	Q1 Q2		397 1195	595 1795	pF
C_{rss}	Reverse Transfer Capacitance		Q1 Q2		37 117	70 245	pF
R_g	Gate Resistance		Q1 Q2	0.1 0.1	1.6 1.0	3.2 2.0	Ω
Switching Characteristics							
$t_{d(on)}$	Turn-On Delay Time	Q1: V_{DD} = 15 V, I_D = 13 A, R_{GEN} = 6 Ω Q2: V_{DD} = 15 V, I_D = 30 A, R_{GEN} = 6 Ω	Q1 Q2		9 12	17 22	ns
t_r	Rise Time		Q1 Q2		3 5	10 10	ns
$t_{d(off)}$	Turn-Off Delay Time		Q1 Q2		21 38	33 60	ns
t_f	Fall Time		Q1 Q2		3 5	10 10	ns
Q_g	Total Gate Charge	V_{GS} = 0 V to 10 V Q1: V_{DD} = 15 V, I_D = 13 A	Q1 Q2		21 64	30 90	nC
Q_g	Total Gate Charge	V_{GS} = 0 V to 4.5 V Q1: V_{DD} = 15 V, I_D = 13 A	Q1 Q2		10 30	13 43	nC
Q_{gs}	Gate to Source Gate Charge	Q2: V_{DD} = 15 V, I_D = 30 A	Q1 Q2		4.5 9		nC
Q_{gd}	Gate to Drain “Miller” Charge	Q2: V_{DD} = 15 V, I_D = 30 A	Q1 Q2		2.0 9		nC

©2013 Fairchild Semiconductor Corporation

Electrical Characteristics T_J = 25 °C unless otherwise noted

Symbol	Parameter	Test Conditions	Type	Min	Typ	Max	Units
Drain-Source Diode Characteristics							
V_{SD}	Source to Drain Diode Forward Voltage	V_{GS} = 0 V, I_S = 13 A (Note 2) V_{GS} = 0 V, I_S = 2 A (Note 2) V_{GS} = 0 V, I_S = 30 A (Note 2) V_{GS} = 0 V, I_S = 2 A (Note 2)	Q1 Q1 Q2 Q2		0.84 0.74 0.77 0.48	1.2 1.2 1.2 1.2	V
t_{rr}	Reverse Recovery Time	Q1: I_F = 13 A, di/dt = 100 A/µs	Q1 Q2		25 33	40 53	ns
Q_{rr}	Reverse Recovery Charge	Q2: I_F = 30 A, di/dt = 300 A/µs	Q1 Q2		9 41	18 66	nC

Notes:

1.$R_{\theta JA}$ is determined with the device mounted on a 1 in^2 pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user's board design.



a. 57 °C/W when mounted on a 1 in^2 pad of 2 oz copper



b. 50 °C/W when mounted on a 1 in^2 pad of 2 oz copper

c. 125 °C/W when mounted on a minimum pad of 2 oz copper

d. 120 °C/W when mounted on a minimum pad of 2 oz copper

2. Pulse Test: Pulse Width < 300 µs, Duty cycle < 2.0%.
3. As an N-ch device, the negative Vgs rating is for low duty cycle pulse ocurrence only. No continuous rating is implied with the negative Vgs rating.
4. Pulsed Id limited by junction temperature, td<=100 µS, please refer to SOA curve for more details.
5. E_{AS} of 73 mJ is based on starting T_J = 25 °C; N-ch: L = 3 mH, I_{AS} = 7 A, V_{DD} = 30 V, V_{GS} = 10 V. 100% test at L= 0.1 mH, I_{AS} = 23 A.
6. E_{AS} of 150 mJ is based on starting T_J = 25 °C; N-ch: L = 3 mH, I_{AS} = 10 A, V_{DD} = 30 V, V_{GS} = 10 V. 100% test at L= 0.1 mH, I_{AS} = 31 A.

©2013 Fairchild Semiconductor Corporation

Typical Characteristics (Q1 N-Channel) T_J = 25 °C unless otherwise noted

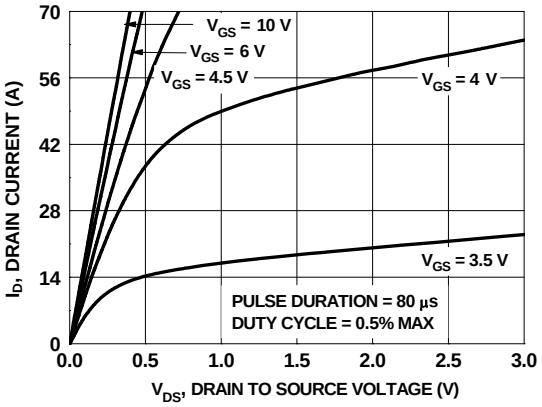

Figure 1. On Region Characteristics

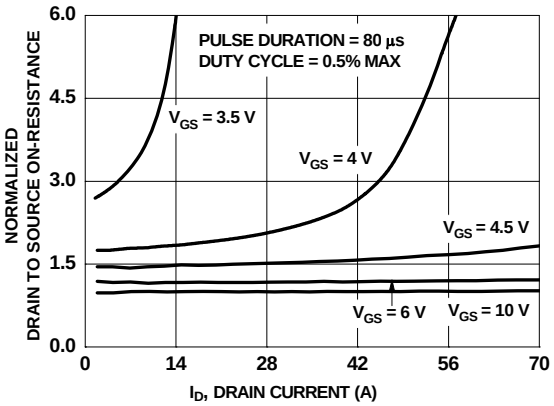

Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage

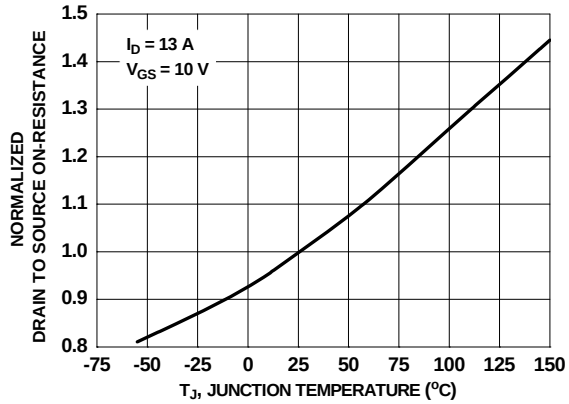

Figure 3. Normalized On Resistance vs Junction Temperature

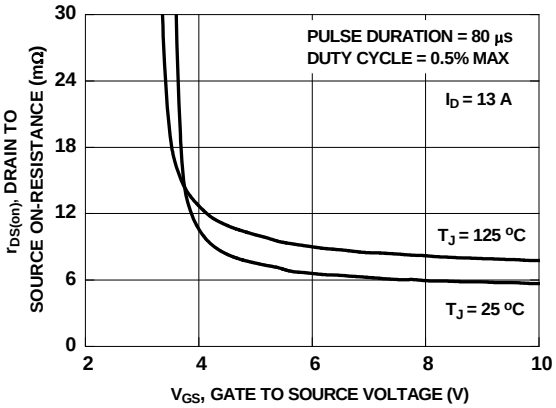

Figure 4. On-Resistance vs Gate to Source Voltage

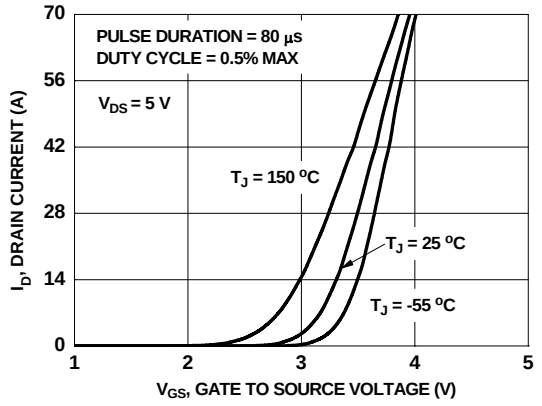

Figure 5. Transfer Characteristics

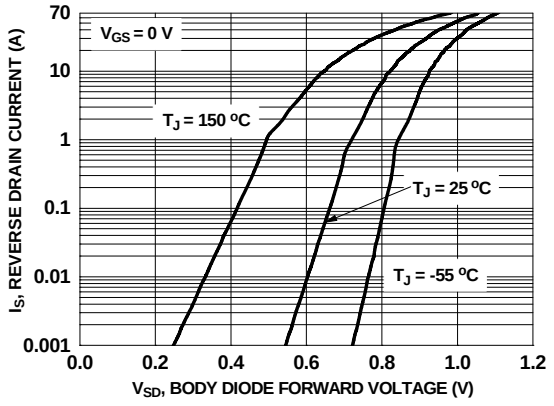

Figure 6. Source to Drain Diode Forward Voltage vs Source Current

Typical Characteristics (Q1 N-Channel) T_J = 25 °C unless otherwise noted

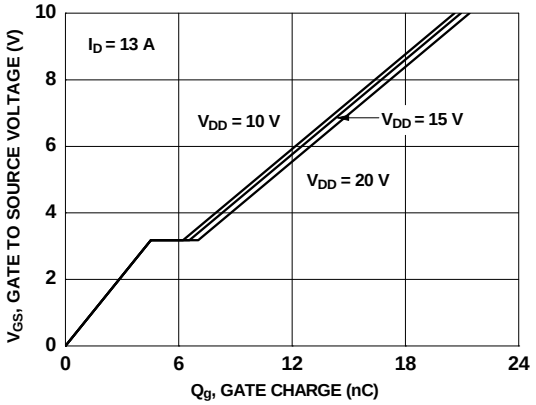

Figure 7. Gate Charge Characteristics

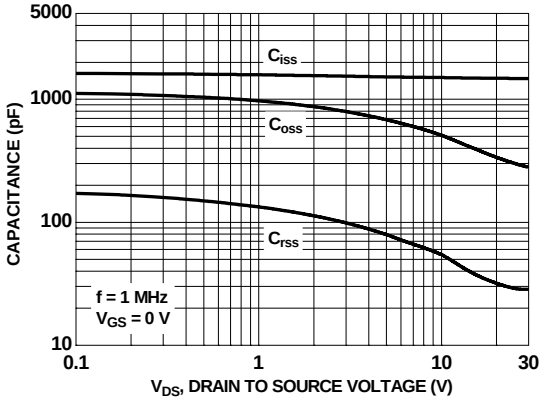

Figure 8. Capacitance vs Drain to Source Voltage

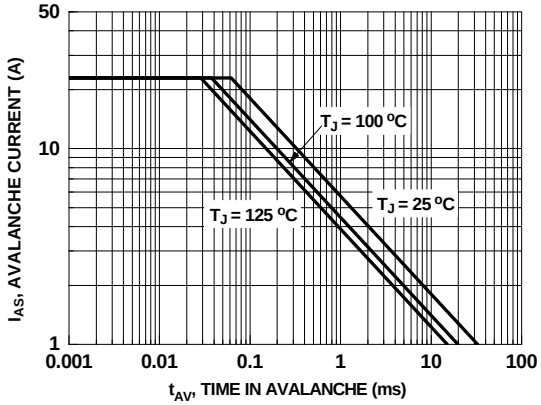

Figure 9. Unclamped Inductive Switching Capability

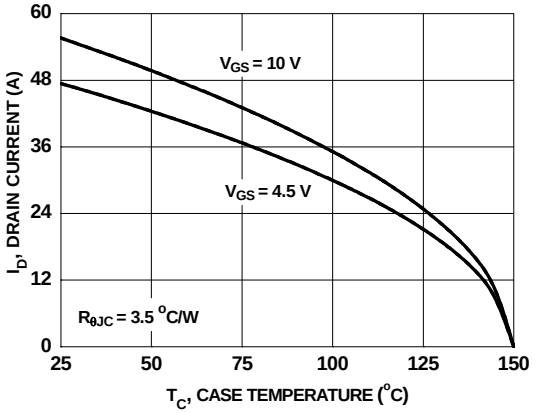

Figure 10. Maximum Continuous Drain Current vs Case Temperature

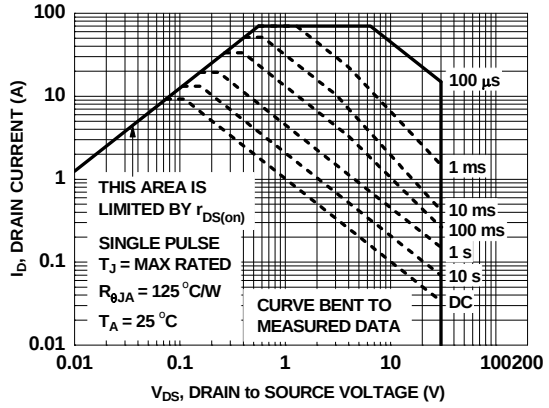

Figure 11. Forward Bias Safe Operating Area

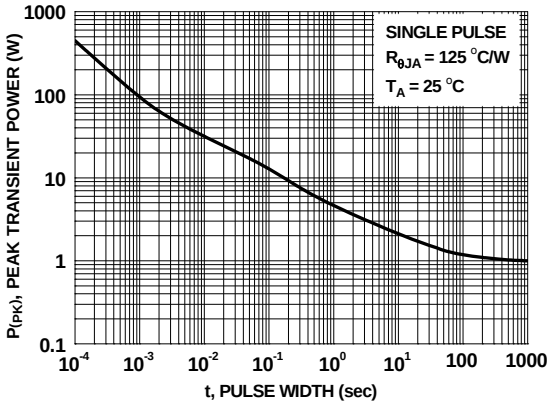

Figure 12. Single Pulse Maximum Power Dissipation

©2013 Fairchild Semiconductor Corporation

Typical Characteristics (Q1 N-Channel) T_J = 25 °C unless otherwise noted

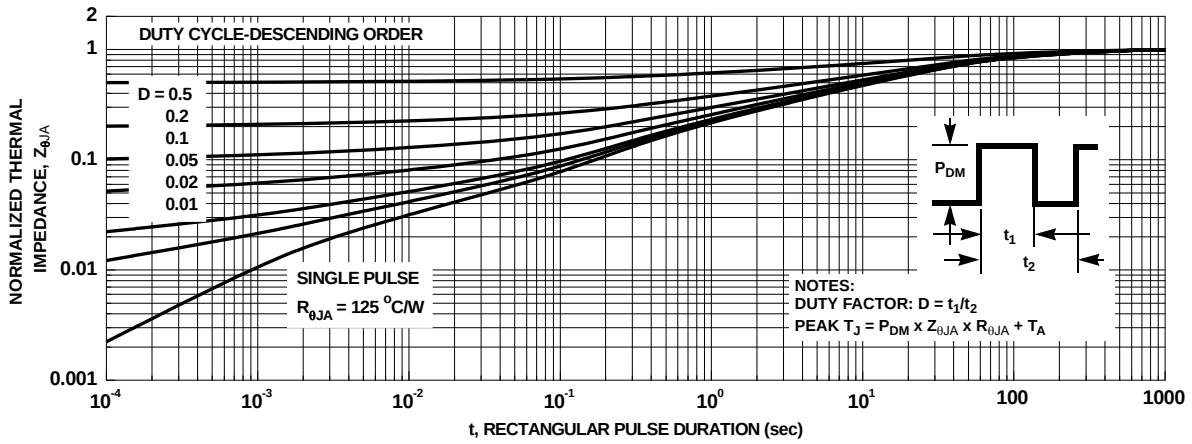

Figure 13. Junction-to-Ambient Transient Thermal Response Curve

Typical Characteristics (Q2 N-Channel) T_J = 25 °C unless otherwise noted

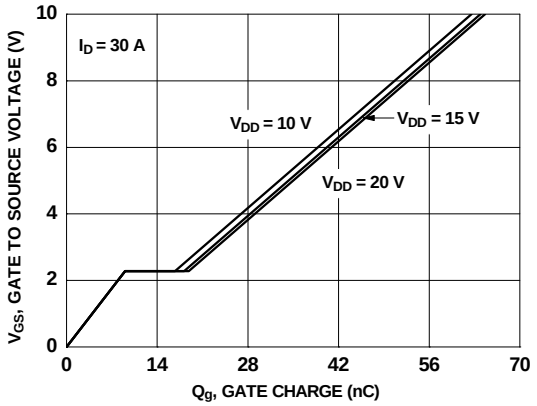

Figure 20. Gate Charge Characteristics

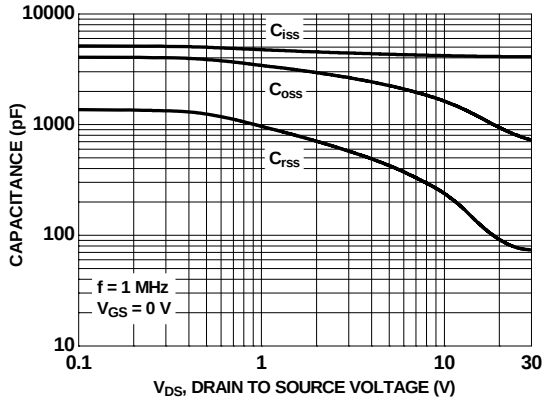

Figure 21. Capacitance vs Drain to Source Voltage

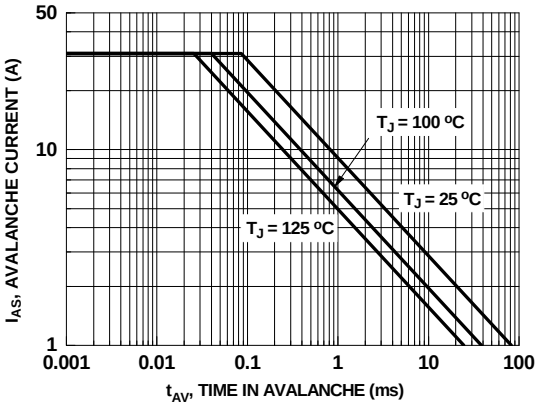

Figure 22. Unclamped Inductive Switching Capability

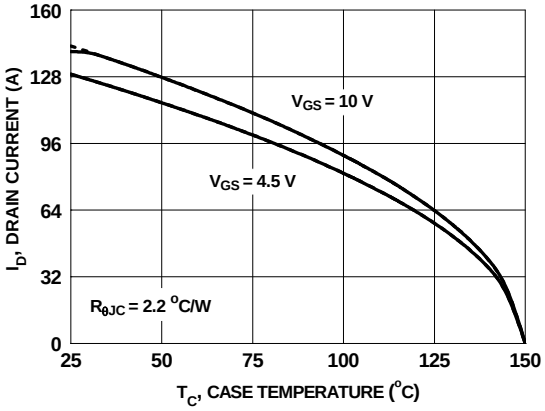

Figure 23. Maximun Continuous Drain Current vs Case Temperature

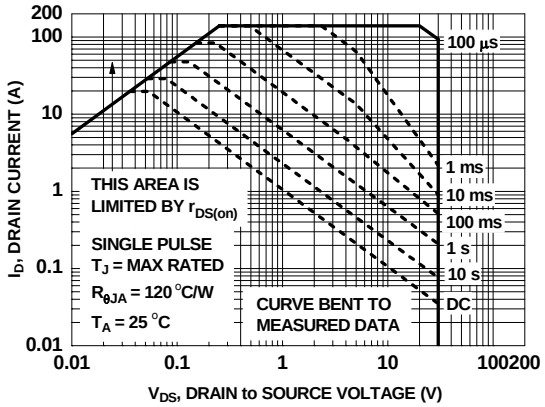

Figure 24. Forward Bias Safe Operating Area

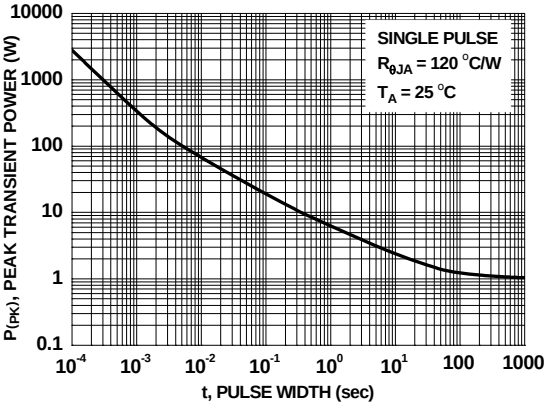

Figure 25. Single Pulse Maximum Power Dissipation

©2013 Fairchild Semiconductor Corporation

Typical Characteristics (Q2 N-Channel) T_J = 25 °C unless otherwise noted

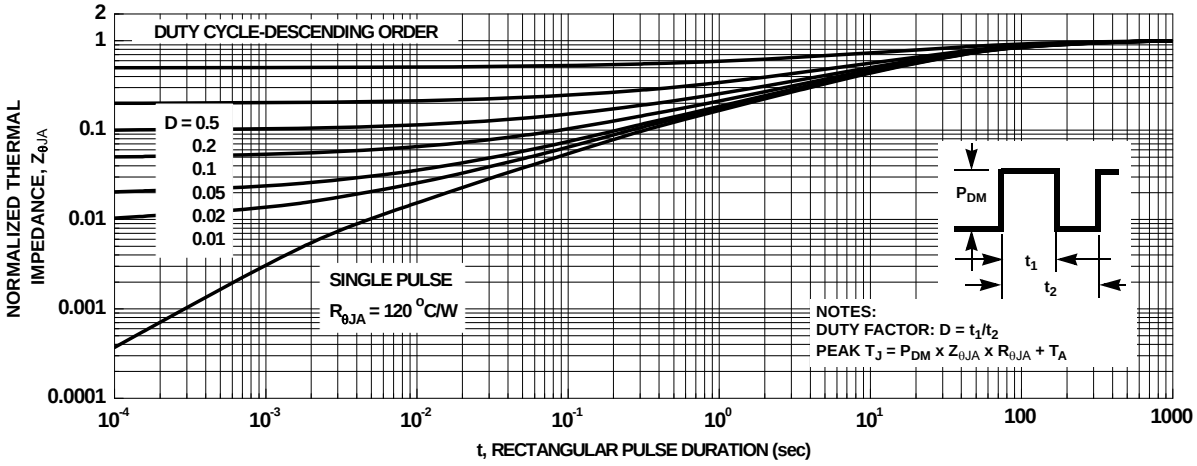

Figure 26. Junction-to-Ambient Transient Thermal Response Curve

Typical Characteristics (continued)

SyncFET™ Schottky body diode Characteristics

Fairchild's SyncFET™ process embeds a Schottky diode in parallel with PowerTrench MOSFET. This diode exhibits similar characteristics to a discrete external Schottky diode in parallel with a MOSFET. Figure 27 shows the reverse recovery characteristic of the FDMS3660AS.

Schottky barrier diodes exhibit significant leakage at high temperature and high reverse voltage. This will increase the power in the device.

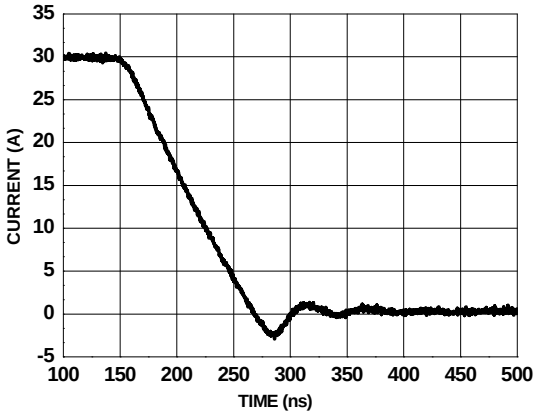

Figure 27. FDMS3660AS SyncFET™ Body Diode Reverse Recovery Characteristic

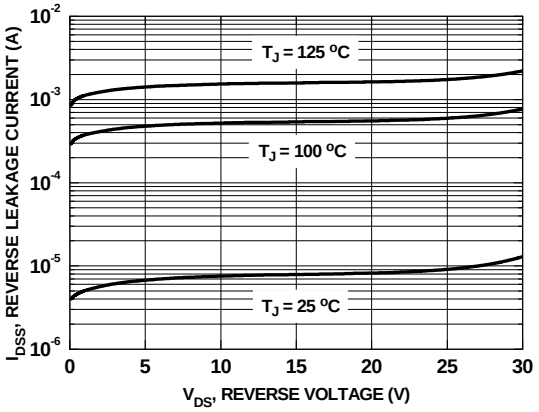

Figure 28. SyncFET™ Body Diode Reverse Leakage Versus Drain-Source Voltage

Dimensional Outline and Pad Layout

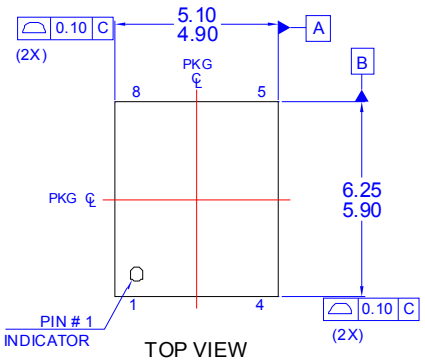

TOP VIEW



SIDE VIEW

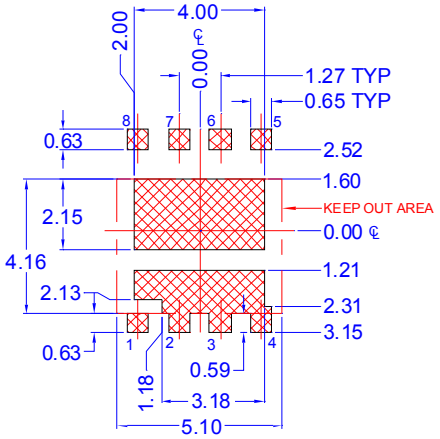

RECOMMENDED LAND PATTERN
FOR SAWN / PUNCHED TYPE

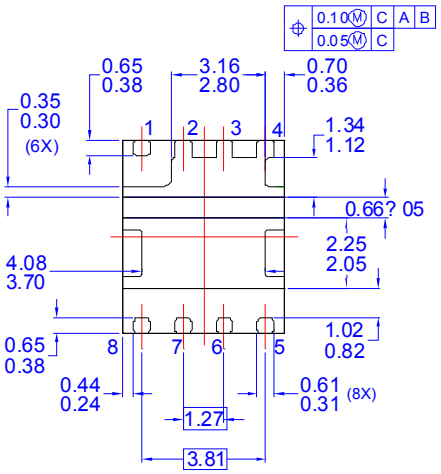

BOTTOM VIEW
OPTION - A (SAWN TYPE)

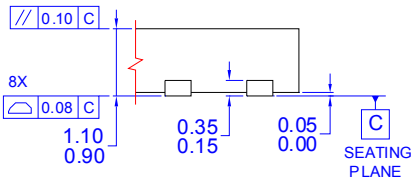

DETAIL 'A'
(SCALE: 2X)

Dimensional Outline and Pad Layout

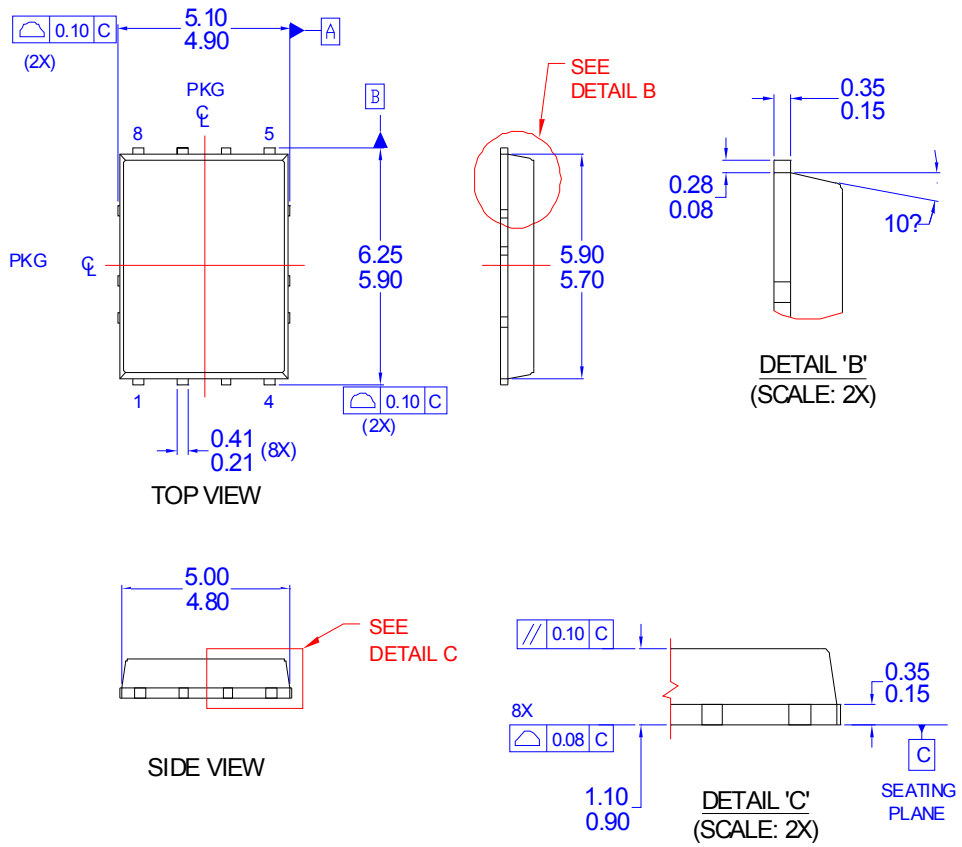

NOTES: UNLESS OTHERWISE SPECIFIED

A) PACKAGE STANDARD REFERENCE: JEDEC REGISTRATION, MO-240, VARIATION AA.

B) ALL DIMENSIONS ARE IN MILLIMETERS.

C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.

D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.

E) IT IS RECOMMENDED TO HAVE NO TRACES OR VIAS WITHIN THE KEEP OUT AREA.

F) DRAWING FILE NAME:

FAIRCHILD SEMICONDUCTOR®

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

2Cool™
AccuPower™
AX-CAP®*
BitSiC™
Build it Now™
CorePLUS™
CorePOWER™
CROSSVOLT™
CTL™
Current Transfer Logic™
DEUXPEED®
Dual Cool™
EcoSPARK®
EfficentMax™
ESBC™
Fairchild®
Fairchild Semiconductor®
FACT Quiet Series™
FACT®
FAST®
FastvCore™
FETBench™
FPS™
F-PFS™
FRFET®
Global Power Resource^{SM}
Green Bridge™
Green FPS™
Green FPS™ e-Series™
G*max*™
GTO™
IntelliMAX™
ISOPLANAR™
Marking Small Speakers Sound Louder and Better™
MegaBuck™
MICROCOUPLER™
MicroFET™
MicroPak™
MicroPak2™
MillerDrive™
MotionMax™
mWSaver™
OptoHiT™
OPTOLOGIC®
OPTOPLANAR®
PowerTrench®
PowerXS™
Programmable Active Droop™
QFET®
QS™
Quiet Series™
RapidConfigure™
Saving our world, 1mW/W/kW at a time™
SignalWise™
SmartMax™
SMART START™
Solutions for Your Success™
SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS®
SyncFET™
Sync-Lock™
SYSTEM GENERAL ®*
TinyBoost™
TinyBuck™
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyWire™
TranSiC®
TriFault Detect™
TRUECURRENT®*
μSerDes™
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. I64