



Bestückungsplan / contact layout

■ bestückt / assemble

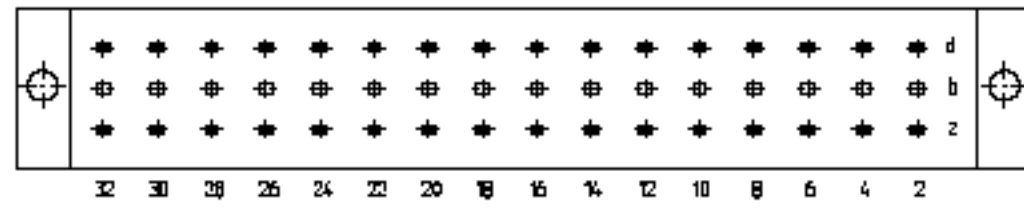

Leiterplatten-Lochbild / PCB drillhole pattern

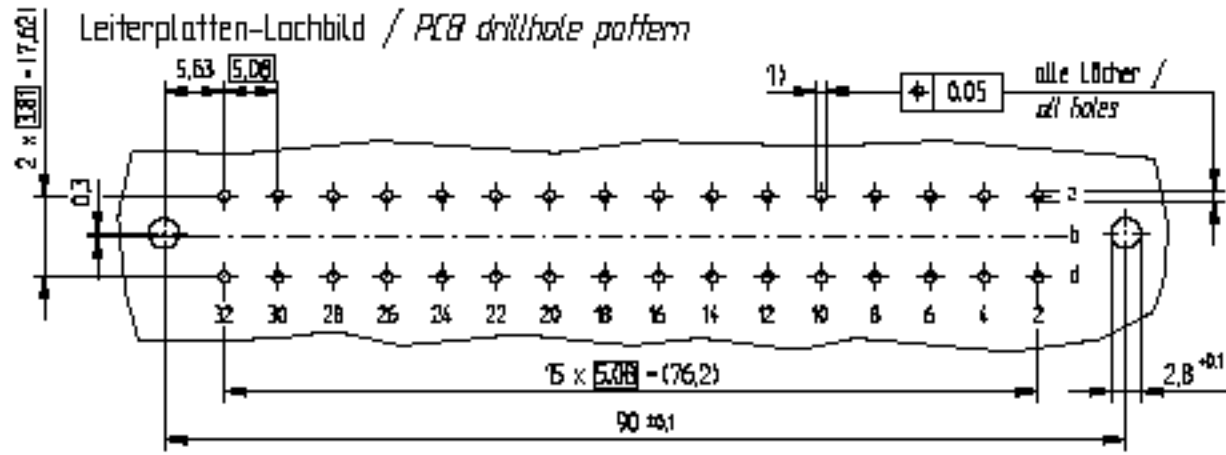

Elastische Einpresszone 2,0 mm / compliant pressfit zone 2,0 mm

Isolierwerkstoff / housing material : PBT GF30

Bauart 2 / type 2

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben gemäß EC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions according to EC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung T4124

diameter of drilled hole see drawing T4124

- ① $\phi 1,0 : \frac{0,08}{0,05}$ Durchmesser des metallisierten Loches
- ② $\phi 1,0 : \frac{0,08}{0,05}$ Diameter of finished plated-through hole
- ③ $\phi 1,5 : \pm 0,005$ Bohrungsdurchmesser des Loches
- ④ $\phi 1,5 : \pm 0,005$ Diameter of drilled hole

Download protection name from DIN 24

| | | |
|---|--|--|
| Information | Tolerances All dimensions in mm | Scale 2:1 |
| All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERM companies before using. | Subject to modification without prior notice. Drawing will not be updated. | Designation Federleiste F32 Flach EE Fern. Con. F32 Flach Pressfit |
| www.ERM.com | 063358 | 1 |
| DATE | 10080620.S24 | STW |