

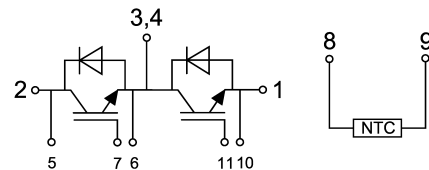
$V_{CES} = 1200V$
 $I_C = 150A$ at $T_C = 80^\circ C$
 $t_{SC} \geq 10\mu sec$
 $V_{CE(ON)} = 1.90V$ at $I_C = 150A$

IGBT Half-Bridge
POWIR ECO 3+™ Package



Applications:

- Industrial Motor Drive
- Uninterruptible Power Supply
- Welding and Cutting Machine
- Switched Mode Power Supply
- Induction Heating



Features	Benefits
Low $V_{CE(ON)}$ and Switching Losses	High Efficiency in a Wide Range of Applications
RBSOA Tested	Rugged Transient Performance
10 μsec Short Circuit Safe Operating Area	
POWIR ECO 3+™ Package	Industry Standard
Lead Free	RoHS Compliant, Environmental Friendly

Base Part Number	Package Type	Standard Pack	Quantity	Orderable Part Number
IRG7T150HF12J	POWIR ECO 3+™	Box	80	RG7T150HF12J

Absolute Maximum Ratings of IGBT

V_{CES}	Collector to Emitter Voltage	1200	V
V_{GES}	Continuous Gate to Emitter Voltage	± 20	V
I_C	Continuous Collector Current	$T_C = 80^\circ C$	150 A
		$T_C = 25^\circ C$	300 A
I_{CM}	Pulse Collector Current	$T_J = 175^\circ C$	300 A
P_D	Maximum Power Dissipation (IGBT)	$T_C = 25^\circ C, T_J = 175^\circ C$	1000 W
T_J	Maximum IGBT Junction Temperature	175	$^\circ C$
T_{JOP}	Maximum Operating Junction Temperature Range	-40 to +150	$^\circ C$
T_{stg}	Storage Temperature	-40 to +125	$^\circ C$

Electrical Characteristics of IGBT at $T_J = 25^\circ\text{C}$ (Unless Otherwise Specified)

Parameter		Min.	Typ.	Max.	Unit	Test Conditions	
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	1200			V	$V_{GE} = 0V, I_C = 2mA$	
$V_{GE(th)}$	Gate Threshold Voltage	5.0	5.8	6.5	V	$I_C = 7.2mA, V_{CE} = V_{GE}$	
$V_{CE(ON)}$	Collector to Emitter Saturation Voltage		1.90	2.20	V	$T_J = 25^\circ\text{C}$	$I_C = 150A, V_{GE} = 15V$
			2.20		V	$T_J = 125^\circ\text{C}$	
I_{CES}	Collector to Emitter Leakage Current			2	mA	$V_{GE} = 0V, V_{CE} = V_{CES}$	
I_{GES}	Gate to Emitter Leakage Current			400	nA	$V_{GE} = \pm 20V, V_{CE} = 0$	
R_{Gint}	Internal Gate Resistance		1.57		Ω		

Switching Characteristics of IGBT

Parameter		Min.	Typ.	Max.	Unit	Test Conditions	
$t_{d(on)}$	Turn-on Delay Time		480		ns	$T_J = 25^\circ\text{C}$	$V_{CC}=600V, I_C = 150A, R_G = 15\Omega, V_{GE}=\pm 15V, \text{Inductive Load}$
			460			$T_J = 125^\circ\text{C}$	
t_r	Rise Time		190		ns	$T_J = 25^\circ\text{C}$	
			190			$T_J = 125^\circ\text{C}$	
$t_{d(off)}$	Turn-off Delay Time		470		ns	$T_J = 25^\circ\text{C}$	
			490			$T_J = 125^\circ\text{C}$	
t_f	Fall Time		180		ns	$T_J = 25^\circ\text{C}$	
			260			$T_J = 125^\circ\text{C}$	
E_{on}	Turn-on Switching Loss		11.1		mJ	$T_J = 25^\circ\text{C}$	
			13.4			$T_J = 125^\circ\text{C}$	
E_{off}	Turn-off Switching Loss		6.7		mJ	$T_J = 25^\circ\text{C}$	
			10.6			$T_J = 125^\circ\text{C}$	
Q_g	Total Gate Charge		1100		nC	$T_J = 25^\circ\text{C}$	
C_{ies}	Input Capacitance		17.3		nF	$V_{CE} = 25V, V_{GE} = 0V, f = 1MHz, T_J = 25^\circ\text{C}$	
C_{oes}	Output Capacitance		1.35				
C_{res}	Reverse Transfer Capacitance		0.80				
RBSOA	Reverse Bias Safe Operating Area	Trapezoid				$I_C = 300A, V_{CC} = 960V, V_P = 1200V, R_G = 15\Omega, V_{GE} = +15V \text{ to } 0V, T_J = 150^\circ\text{C}$	
SCSOA	Short Circuit Safe Operating Area	10			μs	$V_{CC} = 600V, V_{GE} = 15V, T_J = 150^\circ\text{C}$	

Absolute Maximum Ratings of Freewheeling Diode

V _{RRM}	Repetitive Peak Reverse Voltage	1200	V
I _F	Diode Continuous Forward Current, T _C = 25°C	300	A
	Diode Continuous Forward Current, T _C = 80°C	150	
I _{FM}	Pulse Diode Current	300	A

Electrical and Switching Characteristics of Freewheeling Diode

Parameter		Typ.	Max.	Unit	Test Conditions
V _F	Forward Voltage	2.20	2.70	V	T _J = 25°C
		2.40			T _J = 125°C
I _{rr}	Peak Reverse Recovery Current	90		A	T _J = 25°C
		110			T _J = 125°C
Q _{rr}	Reverse Recovery Charge	13.3		μC	T _J = 25°C
		15.2			T _J = 125°C
E _{rec}	Reverse Recovery Energy	2.0		mJ	T _J = 25°C
		6.1			T _J = 125°C

I_F = 150A,
 V_{GE} = 0V

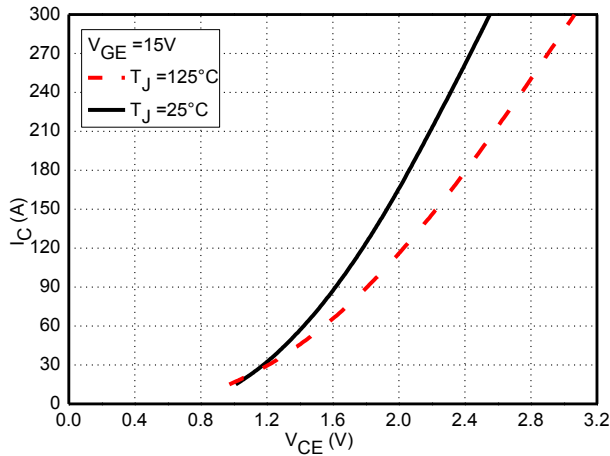
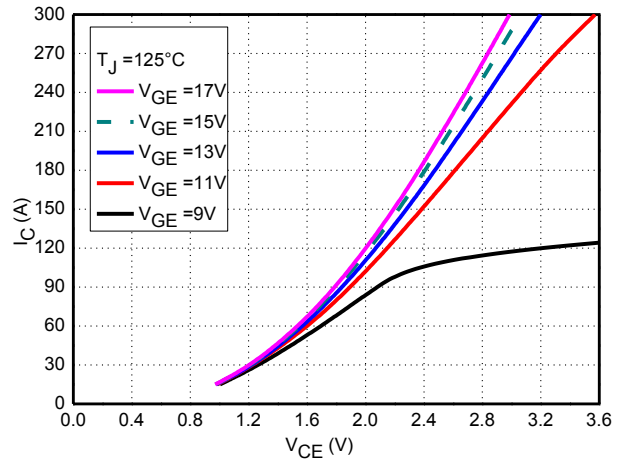
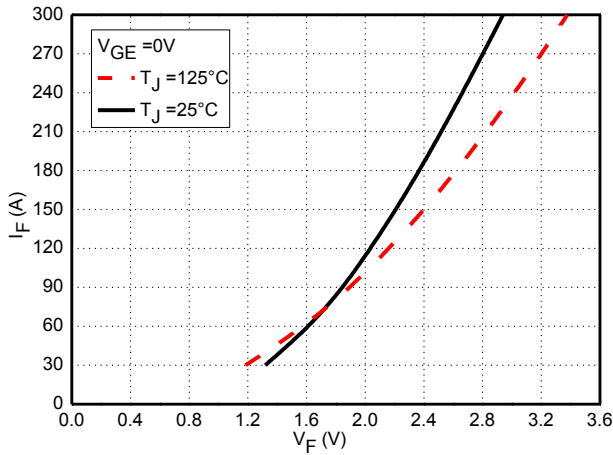
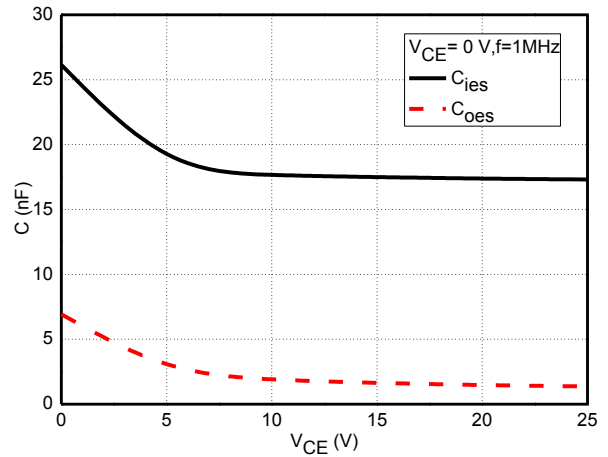
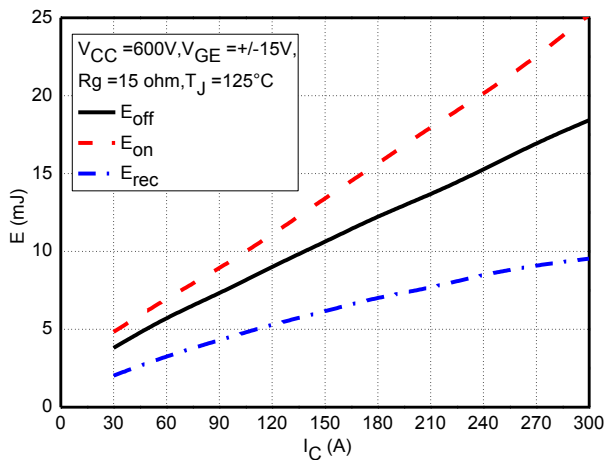
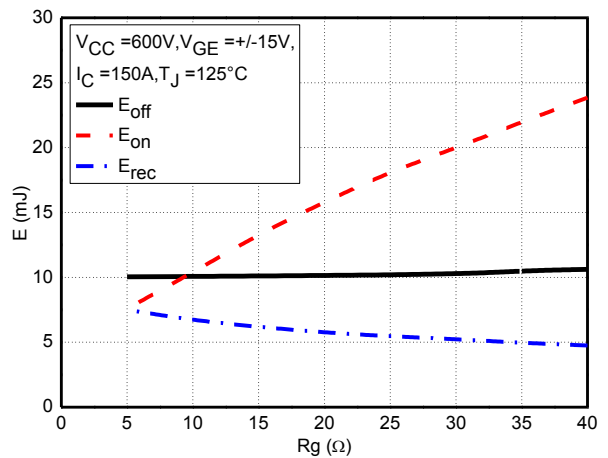
 I_F = 150A,
 di/dt = 1000A/μs,
 V_{rr} = 600V,
 V_{GE} = -15V

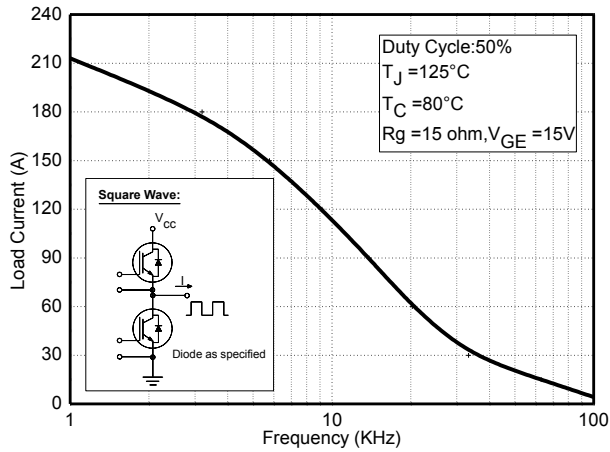
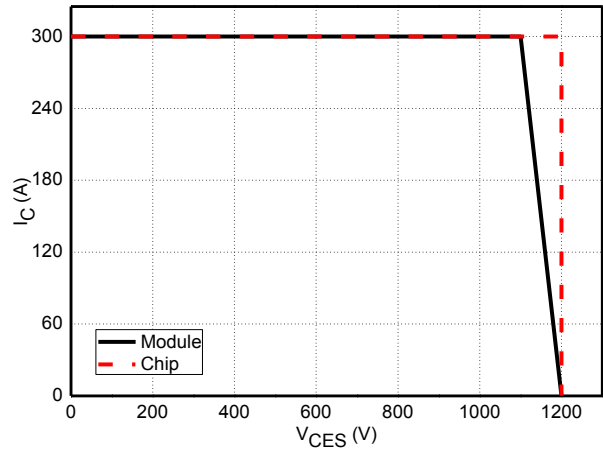
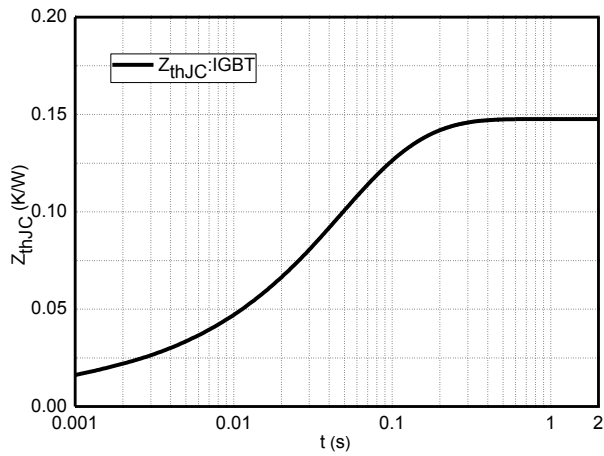
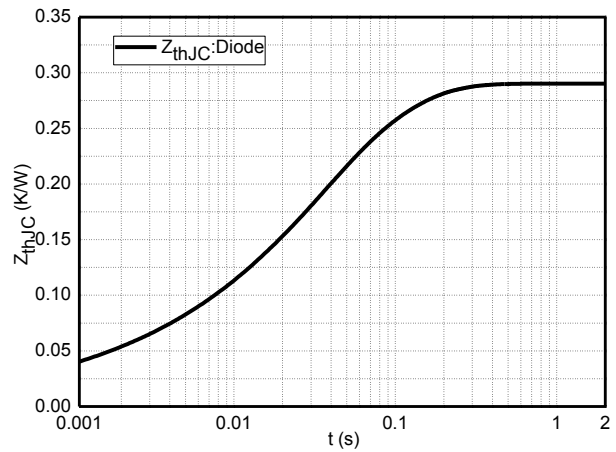
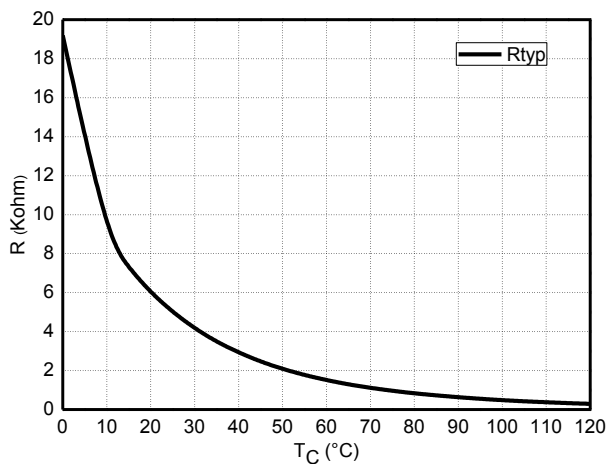
NTC-Thermistor Characteristic Values

Parameter		Typ.	Max.	Unit
R ₂₅	T _C = 25°C	5		kΩ
ΔR/R	T _C = 100°C, R ₁₀₀ = 481Ω		± 5	%
P ₂₅	T _C = 25°C	50		mW
B _{25/50}	R ₂ = R ₂₅ exp[B _{25/50} (1/T ₂ - 1/(298.15K))]	3380		K
B _{25/80}	R ₂ = R ₂₅ exp[B _{25/80} (1/T ₂ - 1/(298.15K))]	3440		K

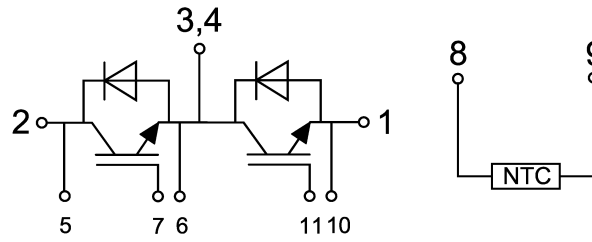
Module Characteristics

Parameter		Min.	Typ.	Max.	Unit
V _{iso}	Isolation Voltage (All Terminals Shorted), f = 50Hz, 1minute			2500	V
R _{θJC}	Junction-to-Case (IGBT)		0.147		°C/W
R _{θJC}	Junction-to-Case (Diode)		0.290		°C/W
R _{θCS}	Case-To-Sink (Conductive Grease Applied)		0.1		°C/W
M	Power Terminals Screw: M6	3.0		5.0	N·m
M	Mounting Screw: M6	4.0		6.0	N·m
G	Weight		330		g

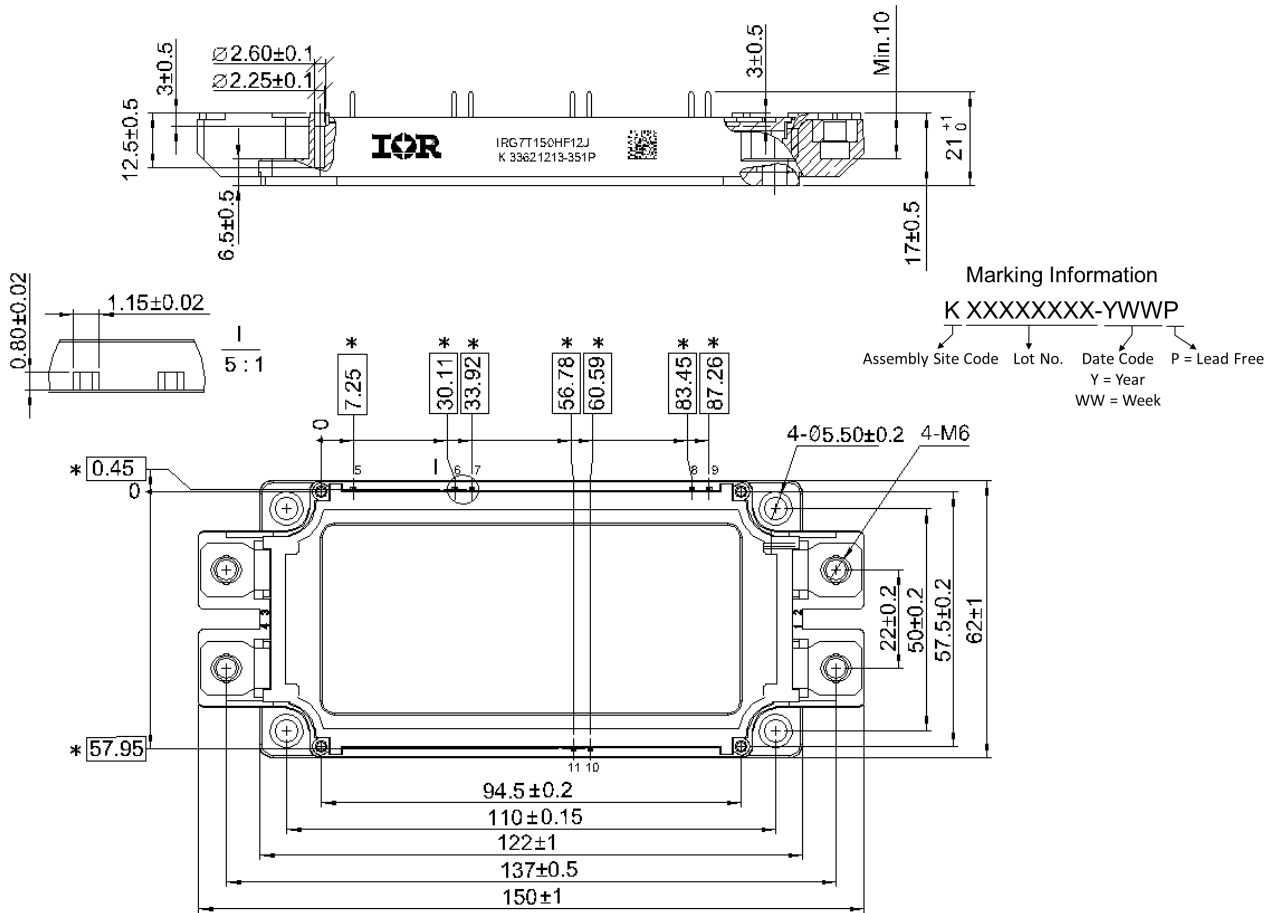

Fig.1 Typical IGBT Saturation Characteristics

Fig.2 Typical IGBT Output Characteristics

Fig.3 Typical Freewheeling Diode Characteristics

Fig. 4 Typical Capacitance Characteristics

Fig.5 Typical Switching Loss vs. Collector Current

Fig.6 Typical Switching Loss vs. Gate Resistance


Fig.7 Typical Load Current vs. Frequency

Fig.8 Reverse Bias Safe Operation Area (RBSOA)

Fig.9 Typical Transient Thermal Impedance (IGBT)

Fig.10 Typical Transient Thermal Impedance (Diode)

Fig. 11 NTC Temperature Characteristics

Internal Circuit:



Package Outline (Unit: mm):



Qualification Information[†]

Qualification Level	Industrial
Moisture Sensitivity Level	Not Applicable
RoHS Compliant	Yes

† Qualification standards can be found at International Rectifier's web site: <http://www.irf.com/product-info/reliability/>