

UF1A - UF1M

1.0 AMP. Glass Passivated High Efficient Rectifiers

DO-41/DO-204AL




Features

- ✧ Plastic package has Underwriters Laboratory Flammability Classification 94V0
- ✧ Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- ✧ Glass passivated chip junction
- ✧ Excellent high temperature switching
- ✧ Ultrafast recovery time for high efficiency
- ✧ Soft recovery characteristics
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375"(.9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Case: JEDEC DO-204AL molded plastic body over passivated chip
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
- ✧ Polarity: Color band denotes cathode
- ✧ Mounting Position: Any
- ✧ Weight: 0.34 grams

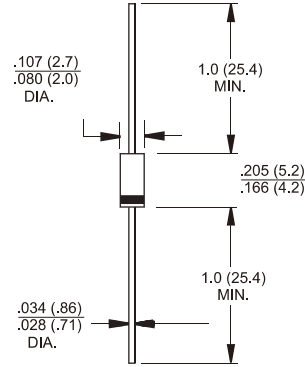

UF1X = Specific Device Code
G = Green Compound
Y = Year
WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	UF1A	UF1B	UF1D	UF1G	UF1J	UF1K	UF1M	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ T _A = 55 °C	I _{F(AV)}	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	V _F	1.0				1.7			V
Maximum DC Reverse Current at @ T _A =25 °C Rated DC Blocking Voltage(Note 1)@ T _A =125 °C	I _R	5.0 150							uA uA
Maximum Reverse Recovery Time (Note 4)	T _{rr}	50				75			nS
Typical Junction Capacitance (Note 2)	C _j	17							pF
Typical Thermal Resistance (Note 3)	R _{θJA} R _{θJL}	60 15							°C/W
Operating/Storage Temperature Range	T _{J, TSTG}	-55 to + 150							°C

- Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
3. Thermal Resistance from junction to ambient and from Junction to Lead length .375" (9.5mm), Mounted on 0.2" x 0.2" (5mm x 5mm) Cu pads.
4. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

RATINGS AND CHARACTERISTIC CURVES (UF1A THRU UF1M)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

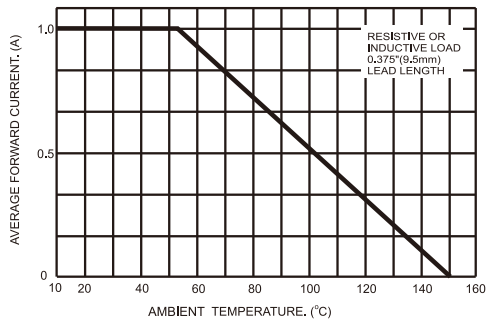


FIG.2- TYPICAL FORWARD CHARACTERISTICS

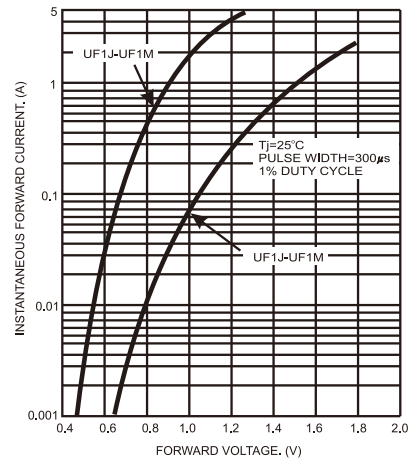


FIG.3- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

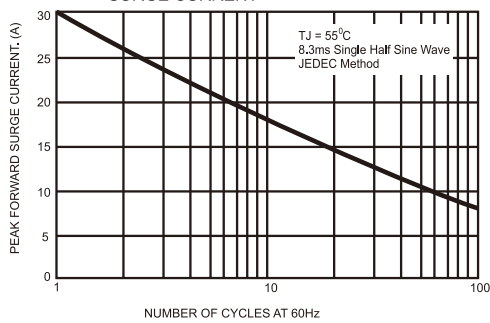


FIG.5- TYPICAL REVERSE CHARACTERISTICS

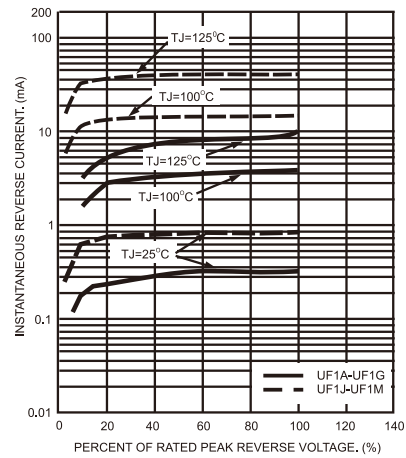


FIG.4- TYPICAL JUNCTION CAPACITANCE

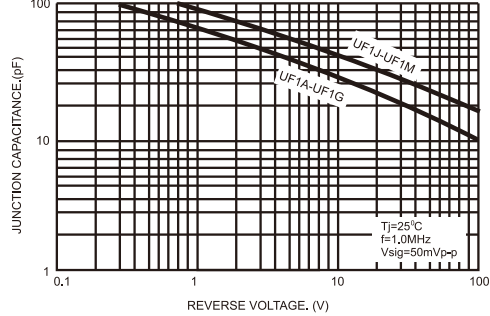


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

