

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2921
(212) 227-6000
FAX: (973) 376-8960


PARAMETERS

IN6052

BIDIRECTIONAL TRANSIENT SUPPRESSOR


Description: Bidirectional Transient Suppressor

Mil/High-Rel? (Y/N).....
Vbr Nom..... 36
 @Ir (test)..... 1.0m
Reverse Standoff Voltage..... 29
Ipp Max. (A)..... 29.0
Nom. Clamp Volt..... 52.0
 @Ipp (test)..... 29.0
t(resp) (S)..... 5.0n
Mat..... Silicon
Pkg Style..... DO-13
Surface Mounted (Y/N)..... N

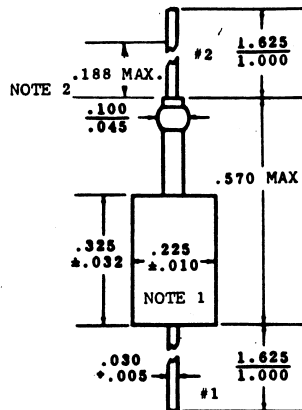

NOTES: (for DO13)

1. The major diameter is essentially constant along its length.
2. Within this zone diameter may vary to allow for lead finishes and irregularities.
3. Dimension to allow for pinch or seal deformation anywhere along tabulation.



Quality Semi-Conductors