

SMD LVPECL Differential
5.0 x 3.2 x 1.2 mm

1.0 pS phase jitter (typical)


10 ~ 1450 MHz



RoHS Compliance

Features




The HTQF, HPQF and HDQF Series are members of Mercury's Q-Family Quick-Turn crystal oscillators that can be delivered within days. With low current consumption (54 mA for LVPECL 622.080 MHz at 3.3V) and an integrated phase jitter performance of 1.0 pS RMS, they have gained its precision frequency control market position by providing engineers with next-day samples for prototypes and low cost, fast delivery for volume production. The perfect solution to replace traditional XO's & VCXO's that use a more expensive, high frequency, fundamental crystal and a noisy PLL multiplier circuit



General Specifications

Parameters		Electrical Spec.								
Input Voltage (V _{DD})		3.3 V ± 5 %								
Frequency Range		10 ~ 1450 MHz								
Output Wave Form		LVPECL output								
Output Logic High " 1 "		V _{DD} - 1.03 (min.) , V _{DD} - 0.6 (max.)								
Output Logic Low " 0 "		V _{DD} - 1.85 (min.) , V _{DD} - 1.6 (max.)								
Output Load		Differential								
Rise Time (Tr) / Fall Time (Tf)		0.2 n sec. (typical) ; 0.5 n sec. (max.) [20% ↔ 80% waveform]								
Duty Cycle		50% ± 5%								
Start - Up Time (Ts)		10 m sec. (typical)								
Storage Temperature		- 50°C to 100°C								
Aging		± 2 ppm per year (max.)								
Current with Output		16 mA								
Current Consumption (V _{DD} = + 2.5V)		100 MHz	250 MHz	500 MHz	750 MHz	1 GHz	1.35 GHz			
All values are typical and over the operating temperatures.		48 mA	50 mA	55 mA	59 mA	62 mA	68 mA			
Frequency Stability ⁽¹⁾ Codes	Frequency Stability over Operating Temperature Range	± 25 ppm	± 50 ppm	± 100 ppm	If non-standard , please enter the desired stability after the " C " or " I " represents .					
	Commercial (-10°C to +70°C)	A	B	C	For example :					
	Industrial (-40°C to +85°C)	D	E	F	" C20 " ± 20 ppm over -10°C to +70°C ; " I20 " ± 20 ppm over -40°C to +85°C					
SSB Phase Noise [dBc / Hz (typical)]	Offset	77.76 MHz	122.88 MHz	125 MHz	156.25 MHz	212.5 MHz	491.52 MHz	622.08 MHz	1 GHz	1.25 GHz
	10 Hz	-57	-68	-63	-55	-62	-61	-48	-52	-42
	100 Hz	-94	-99	-94	-85	-93	-86	-85	-82	-81
	1 KHz	-114	-113	-113	-109	-105	-100	-101	-93	-93
	10 KHz	-123	-119	-118	-116	-113	-105	-102	-97	-96
	100 KHz	-124	-120	-119	-118	-115	-105	-103	-97	-97
	1 MHz	-144	-140	-137	-139	-135	-126	-124	-116	-119
10 MHz	-152	-148	-146	-146	-143	-137	-133	-127	-129	
Phase Jitter (12KHz ~ 20 MHz, RMS) unit : pS.		0.9	0.8	1.1	0.9	1.0	1.1	1.2	1.5	1.1

General Specifications (Unit : mm)

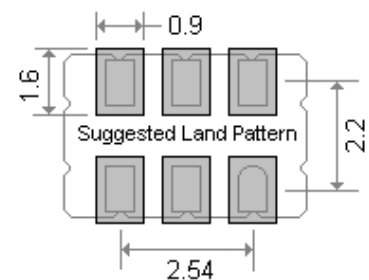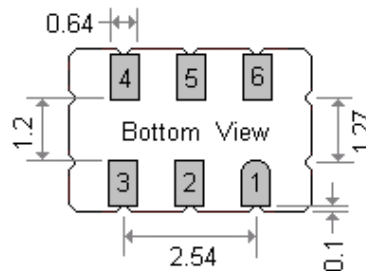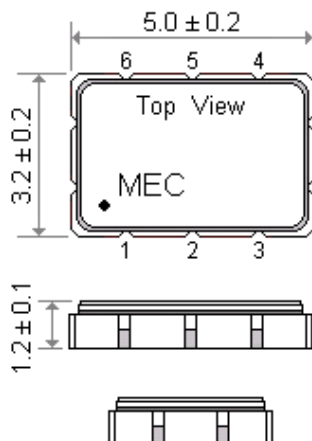

Pad 1	OE: High Enable	Pad 4	LVPECL Differential
Pad 2	No Connection	Pad 5	Complimentary
Pad 3	Ground	Pad 6	Supply Voltage