

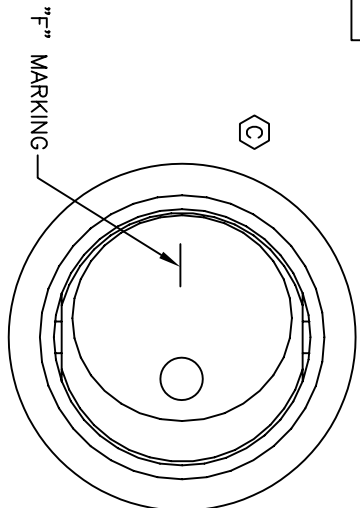
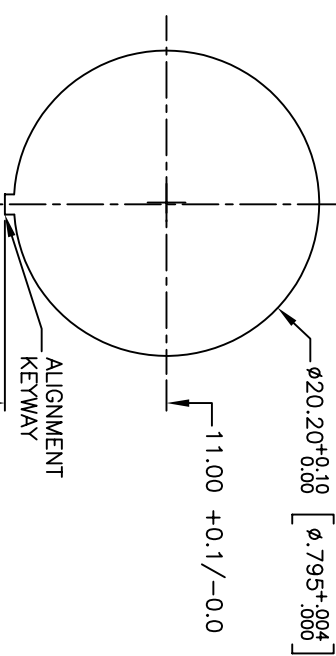
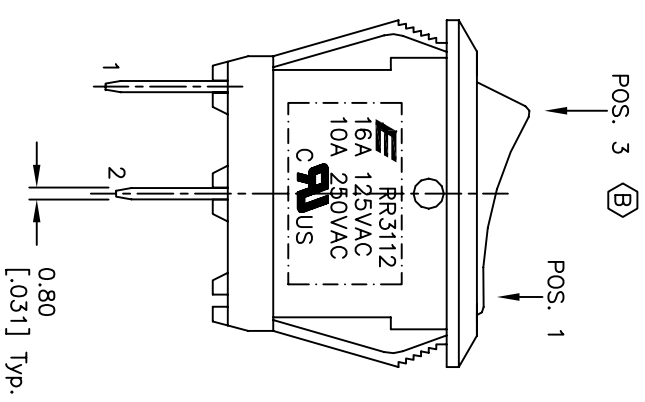


CIRCUIT: 2P: SPDT
CONTACT CONFIGURATION
ON-OFF

SWITCH FUNCTION		
POS. 1	POS. 3	
ON	OFF	
1-2	OPEN	

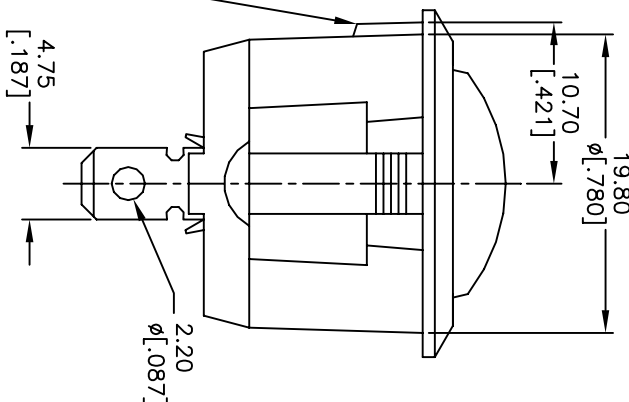

RECOMMEND PANEL MOUNTING

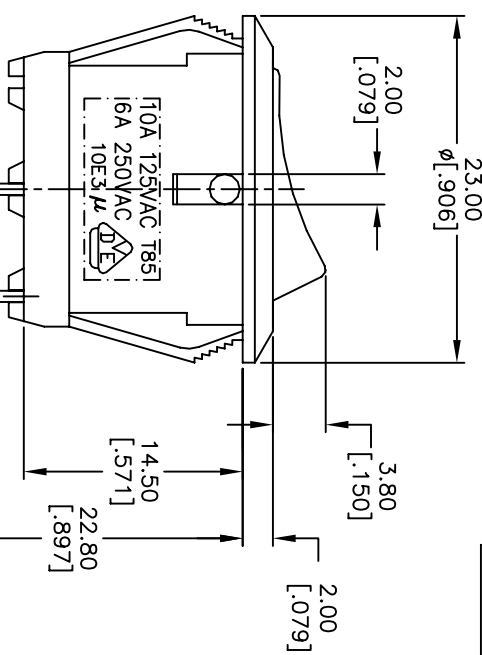

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0 ± 0.4
3. TERM. NOS. FOR REF. ONLY
4. RATING: 16A, 125VAC, 10A, 250VAC UL&CUL APPROVED
10A 125VAC, 6A 250V AC VDE APPROVED
5. CONTACT RESISTANCE: 50m ohm max.
6. INSULATION RESISTANCE: DC 500V 100M ohm min.
7. DIELECTRIC STRENGTHS: AC 1500V 1 minute
8. OPERATING TEMP: 0°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT

D	16972	ROHS NOTE ADDED, FIXED QAD	2/6/07	TN	 RR3112ABLKLKNFFD
C	14755	CORRECT MARKING ORIENTATION	3/9/05	AR	
B	14043	SWITCH FUNCTION	5/27/04	AR	
A	13920	RELEASED FOR PRODUCTION	4/15/04	AR	
REV.	ECN No.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					
					TITLE
					SCALE
					DATE
					DR
					DWG
					REV

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED