

# Zener Voltage Regulators

## 200 mW SOD-323 Surface Mount

- We declare that the material of product compliance with RoHS requirements.

### ORDERING INFORMATION

| Device*    | Package | Shipping        |
|------------|---------|-----------------|
| LM3ZxxxT1G | SOD-323 | 3000/Tape&Reel  |
| LM3ZxxxT3G | SOD-323 | 10000/Tape&Reel |

This series of Zener diodes is packaged in a SOD-323 surface mount package that has a power dissipation of 200 mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.

### Specification Features:

- Standard Zener Breakdown Voltage Range – 2.4 V to 75 V
- Steady State Power Rating of 200 mW
- Small Body Outline Dimensions: 0.067" x 0.049" (1.7 mm x 1.25 mm)
- Low Body Height: 0.035" (0.9 mm)
- Package Weight: 4.507 mg/unit
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- Pb-Free package is available.

### Mechanical Characteristics:

**CASE:** Void-free, transfer-molded plastic

**FINISH:** All external surfaces are corrosion resistant

### MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:

260°C for 10 Seconds

**POLARITY:** Cathode indicated by polarity band

**FLAMMABILITY RATING:** UL94 V-0

**MOUNTING POSITION:** Any

### MAXIMUM RATINGS

| Rating   | Symbol                            | Max        | Unit |
|--|-----------------------------------|------------|------|
| Total Device Dissipation FR-5 Board,<br>(Note 1.) @ TA = 25°C<br>Derate above 25°C | P <sub>D</sub>                    | 200        | mW   |
| Thermal Resistance from<br>Junction to Ambient                                     | R <sub>θJA</sub>                  | 635        | °C/W |
| Junction and Storage<br>Temperature Range  | T <sub>J</sub> , T <sub>stg</sub> | -65 to+150 | °C   |

1. FR-4 Minimum Pad

## LM3Z2V4T1G SERIES



**LM3Z2V4T1G SERIES**

**ELECTRICAL CHARACTERISTICS**

( $T_A = 25^\circ\text{C}$  unless otherwise noted,  
 $V_F = 0.9\text{ V Max. @ } I_F = 10\text{ mA}$  for all types)

| Symbol       | Parameter   |
|--------------|---|
| $V_Z$        | Reverse Zener Voltage @ $I_{ZT}$                    |
| $I_{ZT}$     | Reverse Current                                     |
| $Z_{ZT}$     | Maximum Zener Impedance @ $I_{ZT}$                  |
| $I_{ZK}$     | Reverse Current                                     |
| $Z_{ZK}$     | Maximum Zener Impedance @ $I_{ZK}$                  |
| $I_R$        | Reverse Leakage Current @ $V_R$                     |
| $V_R$        | Reverse Voltage                                     |
| $I_F$        | Forward Current                                     |
| $V_F$        | Forward Voltage @ $I_F$                             |
| $\Theta V_Z$ | Maximum Temperature Coefficient of $V_Z$            |
| C            | Max. Capacitance @ $V_R = 0$ and $f = 1\text{ MHz}$ |



### LM3Z2V4T1G SERIES

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted,  $V_F = 0.9\text{ V Max.}$  @  $I_F = 10\text{ mA}$  for all types)

| Device     | Device Marking | Zener Voltage (Note 2.) |       |      | Zener Impedance        |                     |          | Leakage Current |               | $\theta_{V_Z}$<br>(mV/k)<br>@ $I_{ZT}$ |      | C<br>@ $V_R = 0$<br>f = 1 MHz |     |
|------------|----------------|-------------------------|-------|------|------------------------|---------------------|----------|-----------------|---------------|--|------|-------------------------------|-----|
|            |                | $V_Z$ (Volts)           |       |      | $Z_{ZT}$<br>@ $I_{ZT}$ | $Z_{ZK}$ @ $I_{ZK}$ |          | $I_R$ @ $V_R$   |               | Min                                    | Max  |                               |     |
|            |                | Min                     | Nom   | Max  | mA                     | $\Omega$            | $\Omega$ | mA              | $\mu\text{A}$ | Volts                                  | Min  | Max                           | pF  |
| LM3Z2V4T1G | 00             | 2.2                     | 2.4   | 2.6  | 5                      | 100                 | 1000     | 0.5             | 50            | 1.0                                    | -3.5 | 0                             | 450 |
| LM3Z2V7T1G | 01             | 2.5                     | 2.7   | 2.9  | 5                      | 100                 | 1000     | 0.5             | 20            | 1.0                                    | -3.5 | 0                             | 450 |
| LM3Z3V0T1G | 02             | 2.8                     | 3.0   | 3.2  | 5                      | 100                 | 1000     | 0.5             | 10            | 1.0                                    | -3.5 | 0                             | 450 |
| LM3Z3V3T1G | 05             | 3.1                     | 3.3   | 3.5  | 5                      | 95                  | 1000     | 0.5             | 5             | 1.0                                    | -3.5 | 0                             | 450 |
| LM3Z3V6T1G | 06             | 3.4                     | 3.6   | 3.8  | 5                      | 90                  | 1000     | 0.5             | 5             | 1.0                                    | -3.5 | 0                             | 450 |
| LM3Z3V9T1G | 07             | 3.7                     | 3.9   | 4.1  | 5                      | 90                  | 1000     | 0.5             | 3             | 1.0                                    | -3.5 | -2.5                          | 450 |
| LM3Z4V3T1G | 08             | 4.0                     | 4.3   | 4.6  | 5                      | 90                  | 1000     | 0.5             | 3             | 1.0                                    | -3.5 | 0                             | 450 |
| LM3Z4V7T1G | 09             | 4.4                     | 4.7   | 5.0  | 5                      | 80                  | 800      | 0.5             | 3             | 2.0                                    | -3.5 | 0.2                           | 260 |
| LM3Z5V1T1G | 0A             | 4.8                     | 5.1   | 5.4  | 5                      | 60                  | 800      | 0.5             | 2             | 2.0                                    | -2.7 | 1.2                           | 225 |
| LM3Z5V6T1G | 0C             | 5.2                     | 5.6   | 6.0  | 5                      | 40                  | 700      | 0.5             | 1             | 2.0                                    | -2.0 | 2.5                           | 200 |
| LM3Z6V2T1G | 0E             | 5.8                     | 6.2   | 6.6  | 5                      | 10                  | 100      | 0.5             | 3             | 4.0                                    | 0.4  | 3.7                           | 185 |
| LM3Z6V8T1G | 0F             | 6.4                     | 6.8   | 7.2  | 5                      | 15                  | 160      | 0.5             | 2             | 4.0                                    | 1.2  | 4.5                           | 155 |
| LM3Z7V5T1G | 0G             | 7.0                     | 7.5   | 7.9  | 5                      | 15                  | 160      | 0.5             | 1             | 5.0                                    | 2.5  | 5.3                           | 140 |
| LM3Z8V2T1G | 0H             | 7.7                     | 8.2   | 8.7  | 5                      | 15                  | 160      | 0.5             | 0.7           | 5.0                                    | 3.2  | 6.2                           | 135 |
| LM3Z9V1T1G | 0K             | 8.5                     | 9.1   | 9.6  | 5                      | 15                  | 160      | 0.5             | 0.2           | 7.0                                    | 3.8  | 7.0                           | 130 |
| LM3Z10VT1G | 0L             | 9.4                     | 10    | 10.6 | 5                      | 20                  | 160      | 0.5             | 0.1           | 8.0                                    | 4.5  | 8.0                           | 130 |
| LM3Z11VT1G | 0M             | 10.4                    | 11    | 11.6 | 5                      | 20                  | 160      | 0.5             | 0.1           | 8.0                                    | 5.4  | 9.0                           | 130 |
| LM3Z12VT1G | 0N             | 11.4                    | 12    | 12.7 | 5                      | 25                  | 80       | 0.5             | 0.1           | 8.0                                    | 6.0  | 10                            | 130 |
| LM3Z13VT1G | 0P             | 12.4                    | 13.25 | 14.1 | 5                      | 30                  | 80       | 0.5             | 0.1           | 8.0                                    | 7.0  | 11                            | 120 |
| LM3Z15VT1G | 0T             | 14.3                    | 15    | 15.8 | 5                      | 30                  | 400      | 0.5             | 0.05          | 10.5                                   | 9.2  | 13                            | 110 |
| LM3Z16VT1G | 0U             | 15.3                    | 16.2  | 17.1 | 5                      | 40                  | 400      | 0.5             | 0.05          | 11.2                                   | 10.4 | 14                            | 105 |
| LM3Z18VT1G | 0W             | 16.8                    | 18    | 19.1 | 5                      | 45                  | 400      | 0.5             | 0.05          | 12.6                                   | 12.4 | 16                            | 100 |
| LM3Z20VT1G | 0Z             | 18.8                    | 20    | 21.2 | 5                      | 55                  | 500      | 0.5             | 0.05          | 14.0                                   | 14.4 | 18                            | 85  |
| LM3Z22VT1G | 10             | 20.8                    | 22    | 23.3 | 5                      | 55                  | 500      | 0.5             | 0.05          | 15.4                                   | 16.4 | 20                            | 85  |
| LM3Z24VT1G | 11             | 22.8                    | 24.2  | 25.6 | 5                      | 70                  | 120      | 0.5             | 0.05          | 16.8                                   | 18.4 | 22                            | 80  |
| LM3Z27VT1G | 12             | 25.1                    | 27    | 28.9 | 2                      | 80                  | 300      | 0.5             | 0.05          | 18.9                                   | 21.4 | 25.3                          | 70  |
| LM3Z30VT1G | 14             | 28                      | 30    | 32   | 2                      | 80                  | 300      | 0.5             | 0.05          | 21.0                                   | 24.4 | 29.4                          | 70  |
| LM3Z33VT1G | 18             | 31                      | 33    | 35   | 2                      | 80                  | 300      | 0.5             | 0.05          | 23.2                                   | 27.4 | 33.4                          | 70  |
| LM3Z36VT1G | 19             | 34                      | 36    | 38   | 2                      | 90                  | 500      | 0.5             | 0.05          | 25.2                                   | 30.4 | 37.4                          | 70  |
| LM3Z39VT1G | 20             | 37                      | 39    | 41   | 2                      | 130                 | 500      | 0.5             | 0.05          | 27.3                                   | 33.4 | 41.2                          | 45  |
| LM3Z43VT1G | 21             | 40                      | 43    | 46   | 2                      | 150                 | 500      | 0.5             | 0.05          | 30.1                                   | 37.6 | 46.6                          | 40  |
| LM3Z47VT1G | 1A             | 44                      | 47    | 50   | 2                      | 170                 | 500      | 0.5             | 0.05          | 32.9                                   | 42.0 | 51.8                          | 40  |
| LM3Z51VT1G | 1C             | 48                      | 51    | 54   | 2                      | 180                 | 500      | 0.5             | 0.05          | 35.7                                   | 46.6 | 57.2                          | 40  |
| LM3Z56VT1G | 1D             | 52                      | 56    | 60   | 2                      | 200                 | 500      | 0.5             | 0.05          | 39.2                                   | 52.2 | 63.8                          | 40  |
| LM3Z62VT1G | 1E             | 58                      | 62    | 66   | 2                      | 215                 | 500      | 0.5             | 0.05          | 43.4                                   | 58.8 | 71.6                          | 35  |
| LM3Z68VT1G | 1F             | 64                      | 68    | 72   | 2                      | 240                 | 500      | 0.5             | 0.05          | 47.6                                   | 65.6 | 79.8                          | 35  |
| LM3Z75VT1G | 1G             | 70                      | 75    | 79   | 2                      | 255                 | 500      | 0.5             | 0.05          | 52.5                                   | 73.4 | 88.6                          | 35  |

2. Zener voltage is measured with a pulse test current  $I_Z$  at an ambient temperature of  $25^\circ\text{C}$ .

LM3Z2V4T1G SERIES

Typical Characteristics



Figure 1. Effect of Zener Voltage on Zener Impedance



Figure 2. Typical Forward Voltage



Figure 3. Typical Capacitance



Figure 4. Typical Leakage Current

LM3Z2V4T1G SERIES

Typical Characteristics

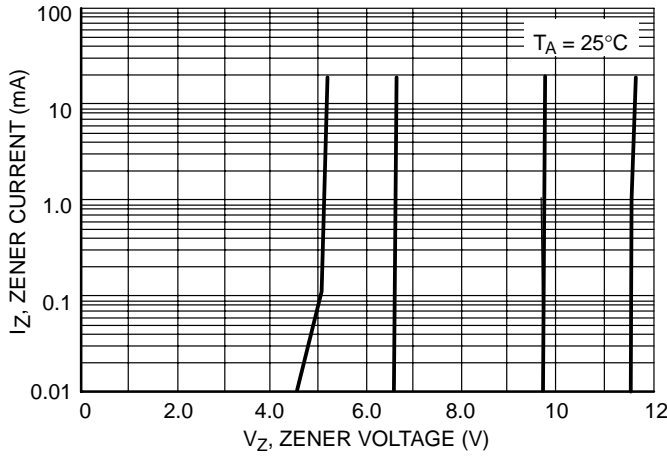


Figure 5. Zener Voltage versus Zener Current ( $V_Z$  Up to 12 V)

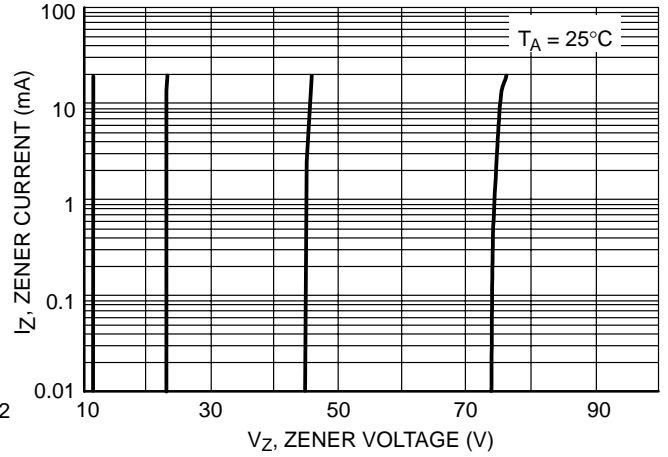


Figure 6. Zener Voltage versus Zener Current (12 V to 75 V)


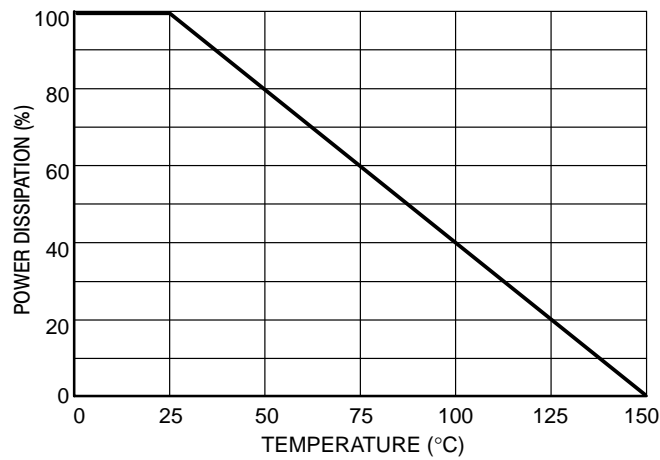


Figure 7. Steady State Power Derating

**LM3Z2V4T1G SERIES**

**PACKAGE DIMENSIONS  
SOD-323**

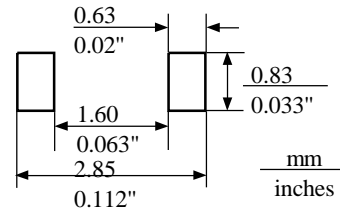

- NOTES:  
1. CONTROLLING DIMENSION: MILLIMETERS  
2. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.

| DIN | MILLIMETERS |       | INCHES    |        |
|-----|-------------|-------|-----------|--------|
|     | MIN         | MAX   | MIN       | MAX    |
| A   | 1.60        | 1.80  | 0.063     | 0.071  |
| B   | 1.15        | 1.35  | 0.045     | 0.053  |
| C   | 0.80        | 1.00  | 0.031     | 0.039  |
| D   | 0.25        | 0.40  | 0.010     | 0.016  |
| E   | 0.15 REF    |       | 0.006 REF |        |
| H   | 0.00        | 0.10  | 0.0000    | 0.004  |
| J   | 0.089       | 0.177 | 0.0035    | 0.0070 |
| K   | 2.30        | 2.70  | 0.091     | 0.106  |

STYLE 1:  
PIN 1: CATHODE  
2: ANODE