




特性: FEATURES

- ◆大电流承受能力.High current capability
- ◆低成本.Low cost
- ◆扩散烧结. Diffused junction
- ◆正向压降低.Low forward voltage drop
- ◆低漏电. Low leakage current
- ◆高浪涌承受能力.High surge current capability
- ◆高温焊接保证: 250℃/10 秒.High temperature soldering guaranteed:
250℃ for 10 seconds

机械性能: MECHANICAL DATA

- ◆封装: 模塑 AR/ARS 封装.Case: AR/ARS molded plastic
- ◆端子: 镀锡端子, 可焊接性符合MIL-STD-750,方法2026.
Terminals: Solder plated, solderable per MIL-STD-750 Method 2026
- ◆极性: 用阴极色带表示. Polarity : indicated by cathode band
- ◆安装位置: 任意.Mounting Position: Any
- ◆重量: 1.8 克. Weight: 1.8 grams (0.07ounce)

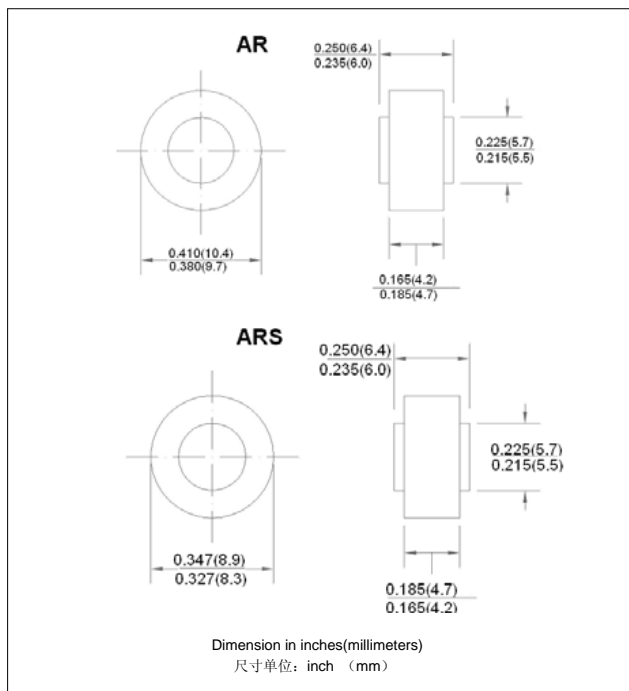

极限值和电参数

TA= 25℃除非另有规定. 单相,正半弦波,60HZ,阻抗或电感负载.为电容装载,减少电流的 20%

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25℃ Ambient temp. Unless otherwise specified.Single phase, half sine wave, 60HZ,resistive or inductive load.

| 型号 TYPE | 符号 | ARB/ARSB35L | ARB/ARSB35M | ARB/ARSB35H | 单位 |
|---|----------------|-------------|-------------|-------------|-------------|
| 最大峰值反向电压 Maximum Current Peak Reverse Voltage | V_{RRM} | 16 | 20 | 28 | V |
| 最大反向有效值电压 Working Peak Reverse Voltage | V_{RMS} | 16 | 20 | 28 | V |
| 最大直流截止电压 Maximum DC Blocking Voltage | V_{DC} | 16 | 20 | 28 | V |
| 击穿电压最小值 Breakdown voltage Min@ $I_{BR}=100mA/TA=25^{\circ}C$ | V_{BRL} | 20 | 24 | 36 | V |
| 击穿电压最大值 Breakdown voltage Max@ $IBR=100mA/TA=25^{\circ}C$ | V_{BRH} | 26 | 32 | 42 | V |
| 最大正向平均整流电流 $Ta=125^{\circ}C$, Maximum Average Forward Rectified Current | $I_{F(AV)}$ | | 35 | | A |
| 峰值正向浪涌电流 Peak Forward Surge Current 8.3ms Single Sine-wave on Rated Load (JEDEC Method) | I_{FSM} | | 400 | | A |
| 最大瞬间正向压降@100A Maximum Instantaneous Forward Voltage Drop at 100A DC | V_F | | 1.04 | | V |
| 最大反向直流电流 $t=200ms$ Maximum DC Reverse Current $Ta = 25^{\circ}C$ at Rated DC Blocking Voltage $Ta = 150^{\circ}C$ | I_R | | 1.0 100 | | μA |
| 工作及储存温度范围 Operating AND Storage Temperature Range | T_J, T_{STG} | | -55~+150 | | $^{\circ}C$ |

注 释 : NOTE 在 1MHz 下测量,施加 4.0V d.c 的反向电压. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.



FIG. 1 –最大正向平均电流降额
FIG. 1 –MAXIMUM AVERAGE FORWARD CURRENT DERATING

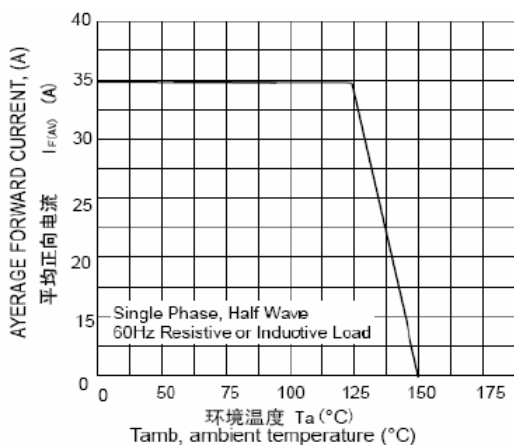


FIG. 3 –脉冲波形
FIG. 3 – PULSE WAVEFORM

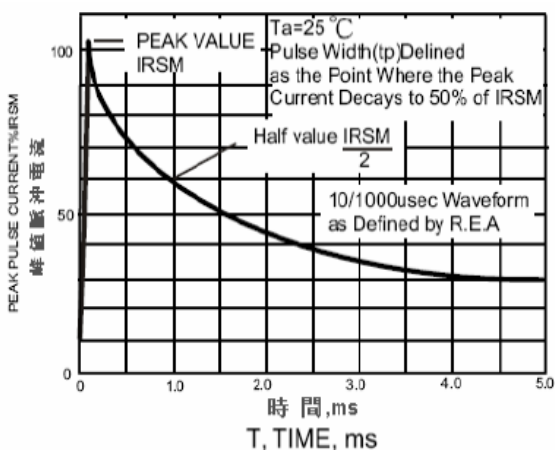


FIG.5–脉冲额定曲线
FIG.5–PULSE RATING CURVEE

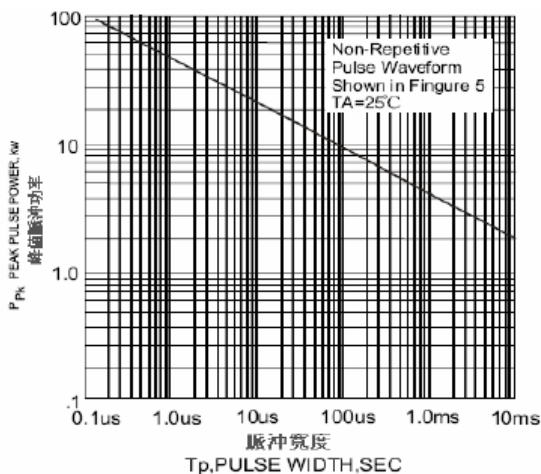


FIG. 2 –最大非重复正向浪涌电流
FIG. 2 –MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

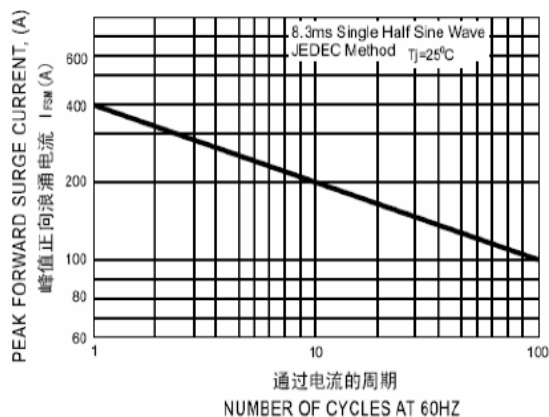


FIG. 4–正向特性曲线(典型)
FIG. 4 – TYPICA FORWARD CHARACTERISTICS

