

mm inch

FEATURES

- **High switching capacity in a compact size**

1 Form C (15 A 125 V AC), 2 Form C (10 A 250 V AC)

- **Rugged construction for tough applications**

- **Long life**

Mechanical: Min. 10⁸ operations (DC),
Min. 5 × 10⁷ operations (AC)

Electrical: Min. 5 × 10⁵ operations (Except for 10 A 250 V AC of 2 Form C)

About Cd-free contacts

We have introduced Cadmium free type products to reduce Environmental Hazardous Substances.

(The suffix "F" should be added to the part number)

Please replace parts containing Cadmium with Cadmium-free products and evaluate them with your actual application before use because the life of a relay depends on the contact material and load.

RoHS Directive compatibility information
<http://www.nais-e.com/>

SPECIFICATIONS

Contacts

| Arrangement | | 1 Form C | 2 Form C |
|--|---------------------------------------|---------------------------------|--|
| Initial contact resistance, max. (By voltage drop 6 V DC 1 A) | | 50 mΩ | |
| Contact material | | AgSnO ₂ type | |
| Rating (resistive) | Nominal switching capacity | 15 A 125 V AC, 10 A 250 V AC | 10 A 250 V AC |
| | Max. switching power | AC: 2,500 VA DC: 90 W | AC: 2,500 VA DC: 90 W |
| | Max. switching voltage | 250 V AC 30 V DC | 250 V AC 30 V DC |
| | Max. switching current | 15 A | 10 A |
| | Min. switching capacity ^{#1} | 100 mA, 5 V DC | |
| Expected life | Mechanical (at 180 cpm) | | 5 × 10 ⁷ (AC), 10 ⁶ (DC) |
| | Electrical (resistive) | 15 A 125 V AC | 5 × 10 ⁵ |
| | | 10 A 250 V AC | 5 × 10 ⁵ |
| | 3 A 30 V DC | 5 × 10 ⁵ | |

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *¹ Measurement at same location as "Initial breakdown voltage" section
- *² Detection current: 10 mA
- *³ Excluding contact bounce time
- *⁴ Half-wave pulse of sine wave: 11ms; detection time: 10μs
- *⁵ Half-wave pulse of sine wave: 6ms
- *⁶ Detection time: 10μs
- *⁷ Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

Characteristics (at 25°C 77°F, 50% Relative humidity)

| | | |
|--|---------------------------|--|
| Max. operating speed | | 20 cpm |
| Initial insulation resistance ^{*1} | | Min. 100 MΩ (at 500 V DC) |
| Initial breakdown voltage ^{*2} | Between contact sets | 1,500 Vrms for 1 min. |
| | Between open contacts | 1,000 Vrms for 1 min. |
| | Between contacts and coil | 2,000 Vrms for 1 min. |
| Operate time (at nominal voltage) | | Max. 25 ms (DC type) Max. 25 ms (AC type) |
| Release time ^{*3} (without diode) (at nominal voltage) | | Max. 25 ms (DC type) Max. 25 ms (AC type) |
| Temperature rise, max. (at nominal voltage) | | Max. 80°C |
| Shock resistance | Functional ^{*4} | Min. 196 m/s ² {20 G} |
| | Destructive ^{*5} | Min. 980 m/s ² {100 G} |
| Vibration resistance | Functional ^{*6} | 10 to 55 Hz at double amplitude of 1 mm |
| | Destructive | 10 to 55 Hz at double amplitude of 2 mm |
| Conditions for operation, transport and storage ^{*7} (Not freezing and condensing at low temperature) | Ambient temperature | -50°C to +70°C -58°F to +158°F |
| | Humidity | 5 to 85% R.H. |
| Unit weight | | Approx. 35 g 1.25 oz |

TYPICAL APPLICATIONS

Power station control equipment, refrigerators, building control equipment, office machines, and medical equipment.

ORDERING INFORMATION

Ex. HL 2 — H — AC240V — F

| Contact arrangement | Terminal arrangement | Coil voltage | Contact material |
|----------------------------|---|---|----------------------------|
| 1: 1 Form C 2: 2 Form C | H: Plug-in HP: PC board HTM: Top mounting L: Light emitting diode wired, plug-in PL: Light emitting diode wired, PC board | AC 6, 12, 24, 48, 120, 240 V DC 6, 12, 24, 48, 110 V | F: AgSnO ₂ type |

Note: Standard packing Carton: 20 pcs., Case: 200 pcs.
UL/CSA approved type is standard.

COIL DATA (at 20 °C 68 °F)

DC coils

| Coil voltage, V DC | Pick-up voltage, V DC (max.) | Drop-out voltage, V DC (min.) | Max. allowable voltage, V DC | Coil resistance, Ω (±10%) | Nominal coil current, mA | Operating power, W | |
|-----------------------|---------------------------------|----------------------------------|---------------------------------|------------------------------|-----------------------------|--------------------|---------|
| | | | | | | Nominal | Minimum |
| 6 | 4.8 | 0.6 | 6.6 | 40 | 150 | 0.90 | 0.58 |
| 12 | 9.6 | 1.2 | 13.2 | 160 | 75 | | |
| 24 | 19.2 | 2.4 | 26.4 | 650 | 37 | | |
| 48 | 38.4 | 4.8 | 52.8 | 2,600 | 18.5 | | |
| 110 | 88.0 | 11.0 | 121.0 | 10,000 | 10 | 1.0 | 0.64 |

AC coils at 60 Hz

| Coil voltage, V DC | Pick-up voltage, V AC (max.) | Drop-out voltage, V AC (min.) | Max. allowable voltage, V AC | Nominal coil current, mA | Operating power, VA | |
|-----------------------|---------------------------------|----------------------------------|---------------------------------|-----------------------------|---------------------|---------|
| | | | | | Nominal | Minimum |
| 6 | 4.8 | 1.8 | 6.6 | 200 | 1.20 | 0.77 |
| 12 | 9.6 | 3.6 | 13.2 | 100 | | |
| 24 | 19.2 | 7.2 | 26.4 | 50 | | |
| 48 | 38.4 | 14.4 | 52.8 | 25 | | |
| 110/120 | 88 | 36 | 132 | 10.9/11.9 | | |
| 220/240 | 176 | 72 | 264 | 6.0/6.5 | | |

Notes:

- The range of coil current is ±15% for AC (60 Hz), ±10% for DC, at 20°C.
- The relay may be used in the range of 80% to 110% of the nominal coil voltage. However, it is recommended that the relay be used at 85% to 110% nominal voltage to take temporary voltage variations into consideration.
- Each coil resistance of DC types is the measured value at a coil temperature of 20°C. Please allow a compensation of ±0.4% resistance for each coil temperature change of ±1°C.
- All AC 240 V types are rated for double coil voltages, both AC 220 V and AC 240 V.
- For use with 220 or 240 V DC, connect a resistor, as suggested below, in series with the 110 V DC relay.



| Voltage | 1 Form C, 2 Form C |
|----------|--------------------|
| 220 V DC | 11 kW (5 W) |
| 240 V DC | 13 kW (5 W) |

| | Plug-in | PC board*1 | Top mounting |
|-------------------|--|---|---|
| HL1 (1 Form C) | <p>Accepts Faston #187</p> <p>Schematic</p> <p>AC type DC type</p> | <p>Schematic</p> <p>AC type DC type</p> | <p>Accepts Faston #187</p> <p>Mounting dimension</p> <p>2-3.2 to 3.5 dia 2-1.26 to .138 dia</p> <p>Schematic</p> <p>AC type DC type</p> |
| HL2 (2 Form C) | <p>Accepts Faston #187</p> <p>Schematic</p> <p>AC type DC type</p> | <p>Schematic</p> <p>AC type DC type</p> | <p>Accepts Faston #187</p> <p>Mounting dimension</p> <p>2-3.2 to 3.5 dia. 2-1.26 to .138 dia.</p> <p>Schematic</p> <p>AC type DC type</p> |

Tolerance: $\pm 0.5 \pm 0.20$

*1 PC board pattern


Copper-side view

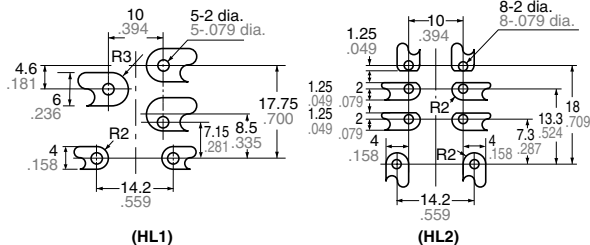


Tolerance: $\pm 0.1 \pm 0.04$

ACCESSORIES


HL1-SS-K (with hold-down clip)

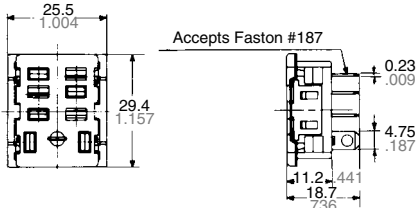


Accepts Faston #187




Panel cutout




HL2-SS-K (with hold-down clip)

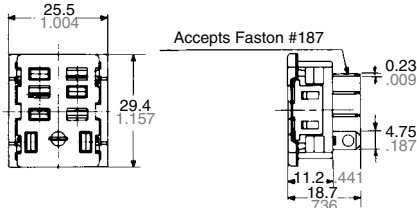


Accepts Faston #187



Panel cutout




Plug-in terminal socket mount
Simply insert socket into panel hole and push down as indicated to lock socket in place.

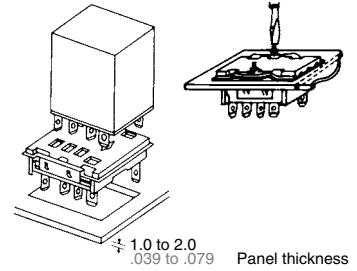

1.0 to 2.0
.039 to .079 Panel thickness


Panel cutout for tandem mounting




Tolerance: $\pm 0.1 \pm 0.004$

2. PC board terminal socket


HL1-PS-K

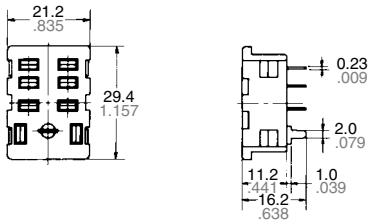


PC board pattern




HL2-PS-K

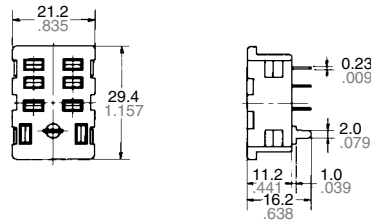

PC board pattern



Layout for tandem mounting
(2 Form C)

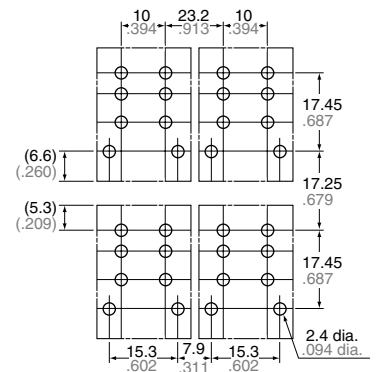


Tolerance: $\pm 0.1 \pm 0.004$


3. Screw terminal socket for DIN rail assembly

mm inch


HL2-SFD-K (with hold-down clip)

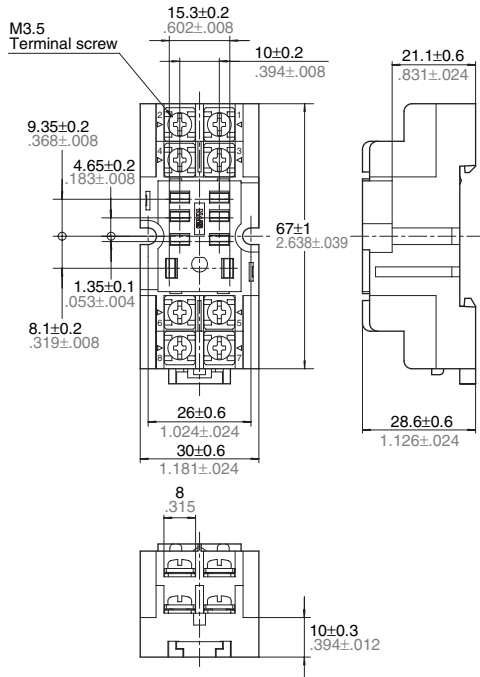

Schematic



Layout for tandem mounting

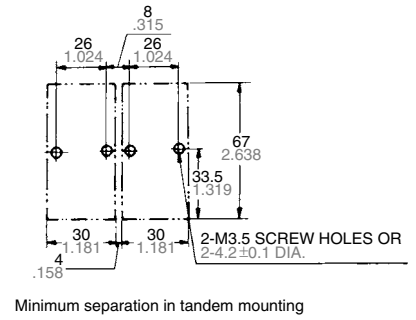

Minimum separation in tandem mounting

Tolerance: ±0.1 ±.004

(Remark) Max. continuous current of all HL sockets is 10 A.

For Cautions for Use, see Relay Technical Information