
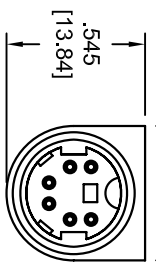
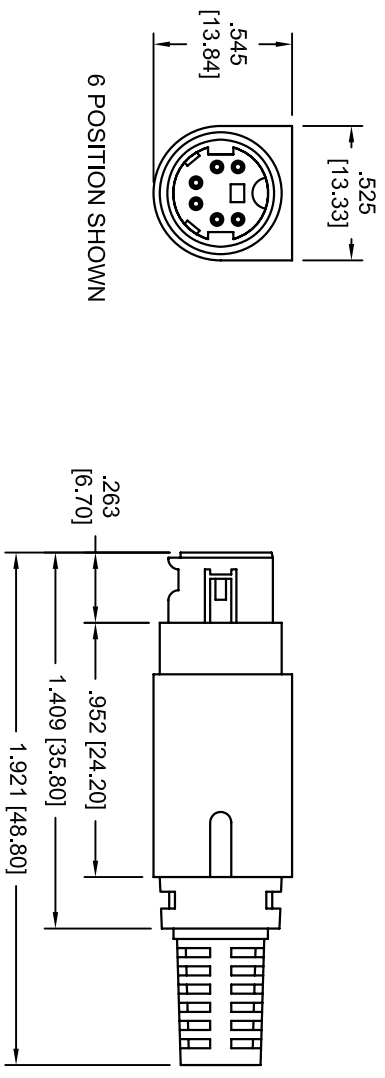


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/3/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

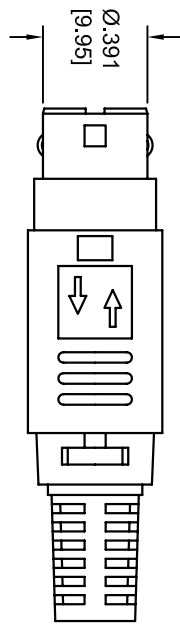

6 POSITION SHOWN

MATING FACE CONFIGURATIONS

MDP-003-LT	MDP-004-LT	MDP-005-LT	MDP-006-LT	MDP-007-LT	MDP-008-LT	MDP-009-LT

**SPECIFICATIONS:**  
**Material:** Insulator: PBT, glass filled, rated UL 94V-0  
 Insulator color: Black  
**Contacts:** Brass  
**Shield:** Copper Alloy, Tin plated  
**Plating:** Nickel on mating area, Tin over Copper underplate on solder area  
**Electrical:**  
 Operating voltage: 100 VAC/12 VDC max.  
 Current rating: 2 Amp max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 500 Mohms min.  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +70°C  
**Environmental:** Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES ±.10 ±.015  
 .XX ±.020 ØXXX ±.010  
 .XXX ±.015 ØXXX ±.010  
 APPROVALS DATE

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710  
 TITLE: MINI DIN POWER PLUG, LOCK TYPE  
 3P THRU 9P

DRAWN	SS	5/3/07	SIZE	PART NO.	REV.
CHECKED			X	MDP-XX-LT	
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1

