


# High Voltage Rectifier Stacks

50mA • 70ns • Axial Leaded

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS											
Part Number	Working Reverse Voltage (V <sub>rw</sub> )	Average Rectified Current (in oil) (I <sub>o</sub> )		Reverse Current @ V <sub>rw</sub> (I <sub>r</sub> )		Forward Voltage (V <sub>f</sub> )		1 Cycle Surge Current I <sub>p</sub> =8.3ms (I <sub>fsm</sub> )	Repetitive Surge Current (I <sub>frm</sub> )	Reverse Recovery Time (1) (T <sub>rr</sub> )	Case Length (L)
		55°C	100°C	25°C	100°C	25°C		25°C	25°C	25°C	
	Volts	mA	mA	µA	µA	Volts	mA	Amps	Amps	ns	in.
SPJ100F	10000	50	30	0.50	20	12	10	5	1	70	1.00
SPJ200F	20000	50	30	0.50	20	24	10	5	1	70	1.15
SPJ300F	30000	50	30	0.50	20	36	10	5	1	70	1.65
SPJ400F	40000	50	30	0.50	20	48	10	5	1	70	2.10

(1)T<sub>rr</sub> Testing: I<sub>f</sub>=125mA, I<sub>r</sub>=250mA, I<sub>rr</sub>=63mA \*Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

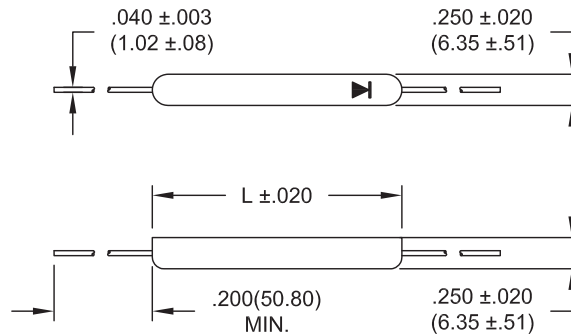

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



Voltage Multipliers Inc.

8711 W. Roosevelt Ave.  
Visalia, CA 93291 USA

Tel: 559.651.1402  
Fax: 559.651.0740

[www.voltagemultipliers.com](http://www.voltagemultipliers.com)  
[www.highvoltagepowersupplies.com](http://www.highvoltagepowersupplies.com)

# SPJ100F SPJ200F SPJ300F SPJ400F

