

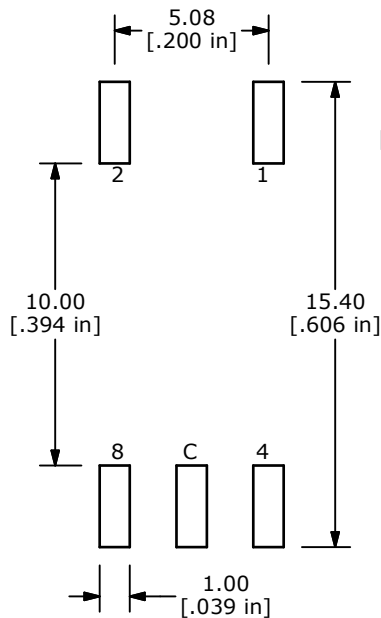
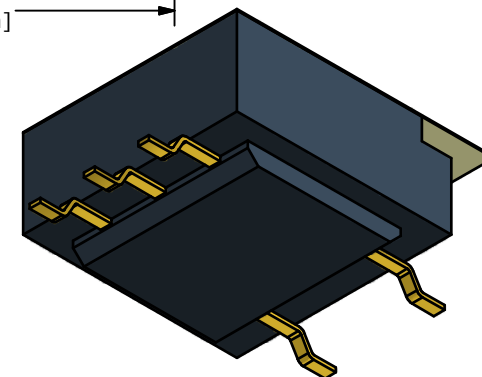
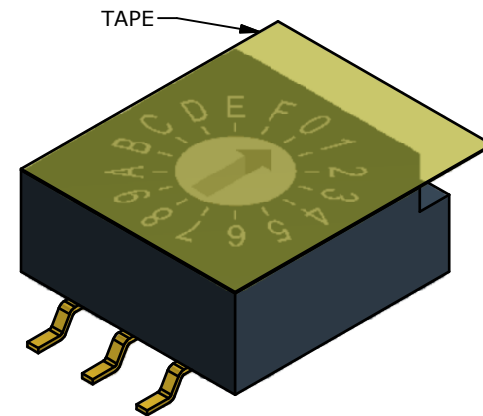


COMPLEMENT CODE

	C	1	2	4	8	
0	○	○	○	○	○	0
1	○		○	○	○	1
2	○	○		○	○	2
3	○			○	○	3
4	○	○			○	4
5	○		○			5
6	○	○				6
7	○				○	7
8	○	○	○	○		8
9	○		○			9
10	○	○			○	A
11	○				○	B
12	○	○	○			C
13	○				○	D
14	○	○				E
15	○					F

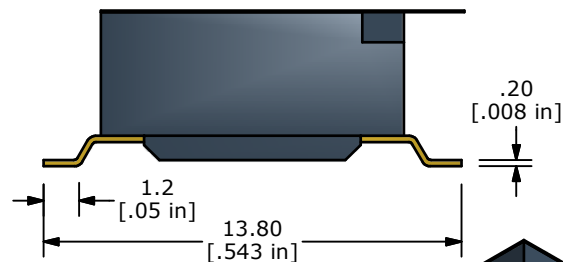

PCB LAYOUT

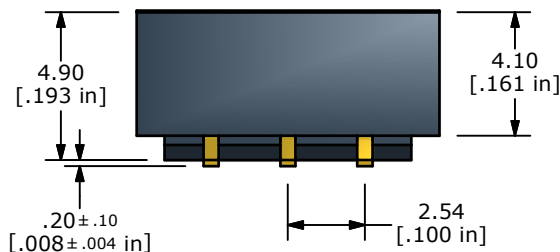

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X±0.4
X.XX±0.25
3. TERMINAL NUMBERS FOR REFERENCE ONLY
4. OPERATING TORQUE: 400gf-cm MAX.
5. CONTACT RATING: 100mA, 5V DC (SWITCHING)
100mA 50V DC (NON-SWITCHING)
6. CONTACT RESISTANCE: 100mΩ MAX.
7. INSULATION RESISTANCE: 100MΩ MIN @ 250VDC
8. DIELECTRIC STRENGTH: 250VAC 1 MIN.
9. LIFE: 10,000 STEPS
10. OPERATING TEMPERATURE: -10°C TO 60°C
11. STORAGE TEMPERATURE: -40°C TO 85°C
- ▲12. PACKAGING: 1000 PCS REEL
13. ▲DENOTES CRITICAL PARAMETER
14. 2011/65/EU (ROHS) COMPLIANT
15. CONTACT AND TERMINAL PLATING: GOLD



TITLE SRM-16CTTR

A	21496	RELEASE TO PRODUCTION	6/30/14	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

SCALE	DATE	DR	DWG	REV
	6/30/2014	EBP	04-SRM16CTTR	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED