
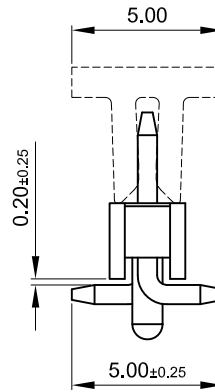
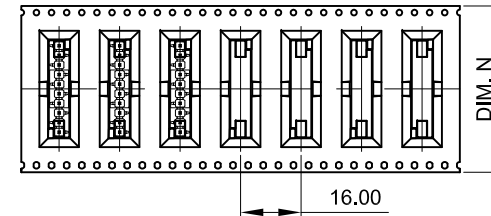


Tape & Reel packaging (with Pick and Place Cap) 400pcs per reel



Pick and Place Cap for tape and reel packaging

Notes:

Material and finish:

Contact: Brass
Gold over 30~80u" nickel plating
Insulation: PA9T UL94-V0, color black

Specifications:

Current rating: 3.0A
Contact resistance: 20mΩ Max.
Withstanding Voltage: 1000V AC/DC
Insulation resistance: 1000MΩ Min.
Operating temperature: -40°C to +105°C

Tube Packaging Q'ty

14	16
12	19
10	22
8	28
6	38
4	57
2	114
No. of positions	Q'ty per tube

129189	129182	129175	129168	14	35.56	33.02	30.48	56	10.00
129188	129181	129174	129167	12	30.48	27.94	25.40	56	10.00
129187	129180	129173	129166	10	25.40	22.86	20.32	44	10.00
129186	129179	129172	129165	8	20.32	17.78	15.24	44	10.00
129185	129178	129171	129164	6	15.24	12.70	10.16	32	10.00
129184	129177	129170	129163	4	10.16	7.62	5.08	24	10.00
129183	129176	129169	129162	2	5.08	2.54	0.00	24	7.00

Id-Nr. Tape&Reel	Id-Nr. Tube	Id-Nr. Tape&Reel	Id-Nr. Tube	No of Pos.	DIM. G	DIM. H	DIM. M	DIM. N	DIM. P
10u" gold plating	10u" gold plating	0.8u" gold plating	0.8u" gold plating						

Information:	Tolerances X: ±0.50 X*: ±10° X.X: ±0.40 X.X*: ±5° X.XX: ±0.25 X.XX*: ±3°	Scale 4:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, contact one of the ERNI companies before using	Subject to modification without prior notice. Drawing will not be updated.	For further information about I. D. number see manufacturing document
		Designation 2.54mm Vertical Single Row Header SMT with Locating Pegs
ERNI Asia Holding www.erni.com		129161
A	13-08-2013	
Rev.	Date	129161.DWG