
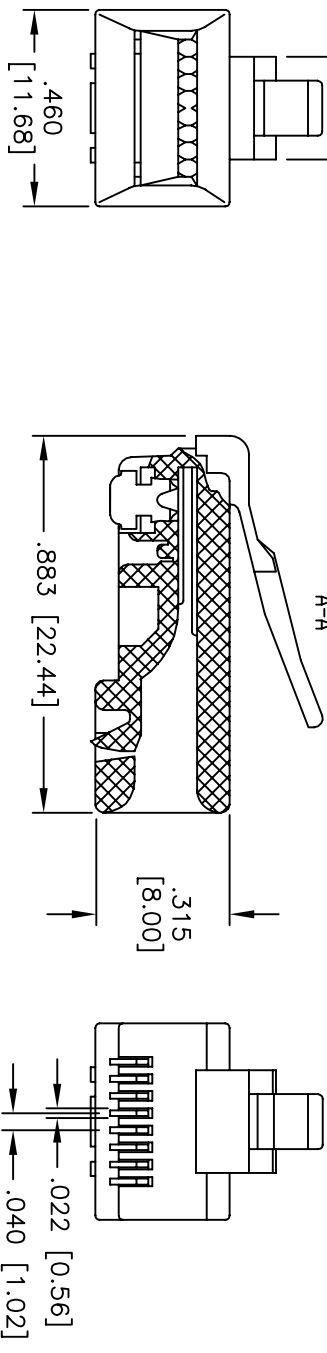


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/1/04	
A		REDRAWN	5/28/08	

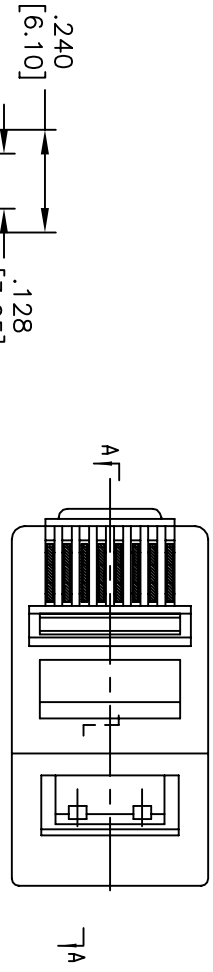

SPECIFICATIONS:

Material:
 Insulator: Polycarbonate, rated UL 94V-0
 Insulator color: Clear
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area

Electrical:
 Operating voltage: 150 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +70°C

Environmental:
 Lead free, RoHS compliant

"X"	PLATING
U	15 µin Gold
W	30 µin Gold
G	50 µin Gold

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]

TOLERANCES: EXCEPT AS NOTED	INCHES	HOLES
.X	± .10	ØXX ± .10
.XX	± .020	ØXXX ± .015
.XXX	± .015	ØXXXX ± .010

APPROVALS: _____ DATE: _____

DRAWN	SS	10/4/04
CHECKED		
APPROVED		

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR TELEPHONE PLUG, 8P8C
 STANDARD OVAL WIRE TYPE

SIZE: X
 PART NO.: MTP-88-X
 SCALE: NTS

REV: A
 SHEET 1 OF 1

